
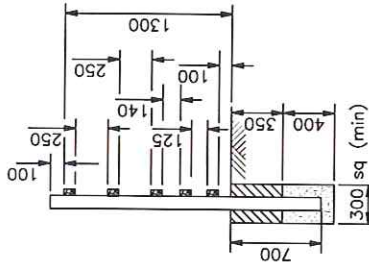
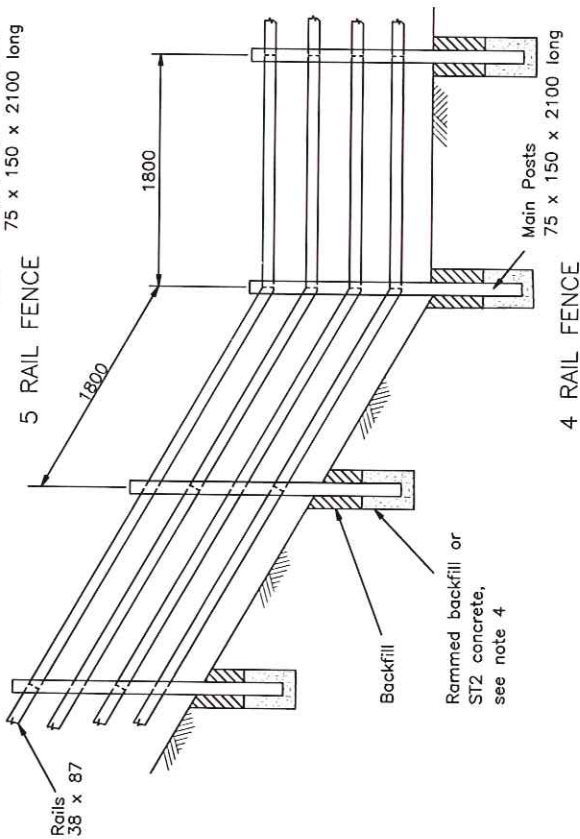


- VERGE
- 150mm DEEP ROLLED ROAD PLAININGS OVER TERRAM TOPPED WITH 3mm DUST WHINSTONE DRESSING.
- 25mm AC6 DENSE SURF 100/150 SURFACE COURSE
60mm AC20 DENSE BIN 40/60 BASE COURSE
100mm AC32 DENSE BASE 40/60 ROAD BASE ON 150 SUB-BASE.
- TARMAC CARRIAGEWAY SURFACE
(NOT SMA AS EARLY AGE SLIP PROBLEMS)


4 RAIL FENCE TO HED-H3
MINIMUM OF 3 PABS.

1/200 @ A4.

BLFAREHAM PIC RD.
SK001.
16/2/16.

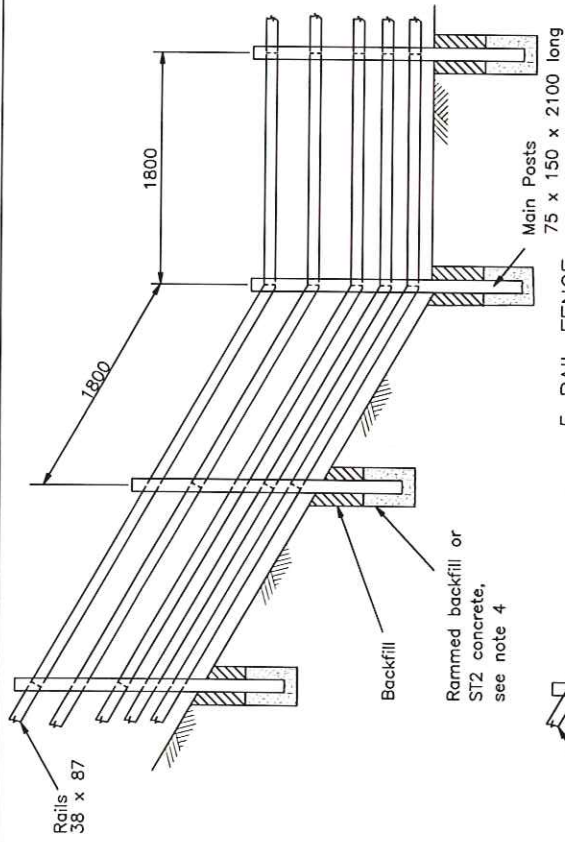

SECTION THROUGH
 Q OF MAIN POSTS

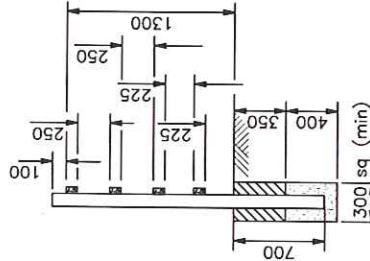

SECTION THROUGH
 Q OF MAIN POSTS

NOTES
 1. Specification Clause 306 applies unless otherwise stated in Appendix 3/1 or Appendix 1/15.

2a). Where plain or barbed wire is required in Appendix 3/1 or Appendix 1/15 it shall be zinc coated and comply with BS 4102.

2b). 4 rail fence - BS 1722 Part 7 Type SPR 13/4 applies unless otherwise stated.

2c). 5 rail fence - BS 1722 Part 7 Type SPR 13/4 applies (except for the addition of a fifth rail, rails spaced as shown) unless otherwise stated.

3. Where the fence forms a boundary between the highway and private property, the rails shall be fixed to the private property side unless otherwise stated in Appendix 3/1 or 1/15.

4. Posts can be supported by rammed backfill or ST2 concrete unless Appendix 1/15 or Appendix 3/1 require ST2 concrete to be used.

5. ALL DIMENSIONS ARE IN MILLIMETRES.

HIGHWAY CONSTRUCTION DETAILS

FENCES, STILES &
 GATES

Issue	Date
D	MAY 04
C	MAR 98
B	AUG 93
A	DEC 91

MOTORWAY AND ACCOMMODATION WORKS
 TIMBER POST AND 4 (OR 5)
 RAIL FENCES

Drawing No.

H3