


REV	DATE	BY	DESCRIPTION	CHK	APD
First Floor, South Wing Equinox North Great Park Road Almondsbury Bristol BS32 4QL  <b>Pegasus Group</b> 01454 625945 www.pegasusgroup.co.uk Planning   Design   Environment   Economics					
<b>CLIENT:</b> FAREHAM LAND LP & BARGATE HOMES LTD					
<b>PROJECT:</b> LAND TO THE NORTH OF GOSPORT RD FAREHAM					
<b>TITLE:</b> SITE LOCATION PLAN					
<b>SCALE @ A3:</b> 1: 25,000			<b>CHECKED:</b> MB		<b>APPROVED:</b> TJ
<b>CAD FILE:</b> BRS.4989_FIGURES			<b>DESIGN-DRAWN:</b> SLW		<b>DATE:</b> 08.06.18
<b>PROJECT No:</b> BRS.4989			<b>DRAWING No:</b> FIGURE 01		<b>REV:</b> -

## **FIGURE 2**

### **PEDESTRIAN WALKING ROUTES**

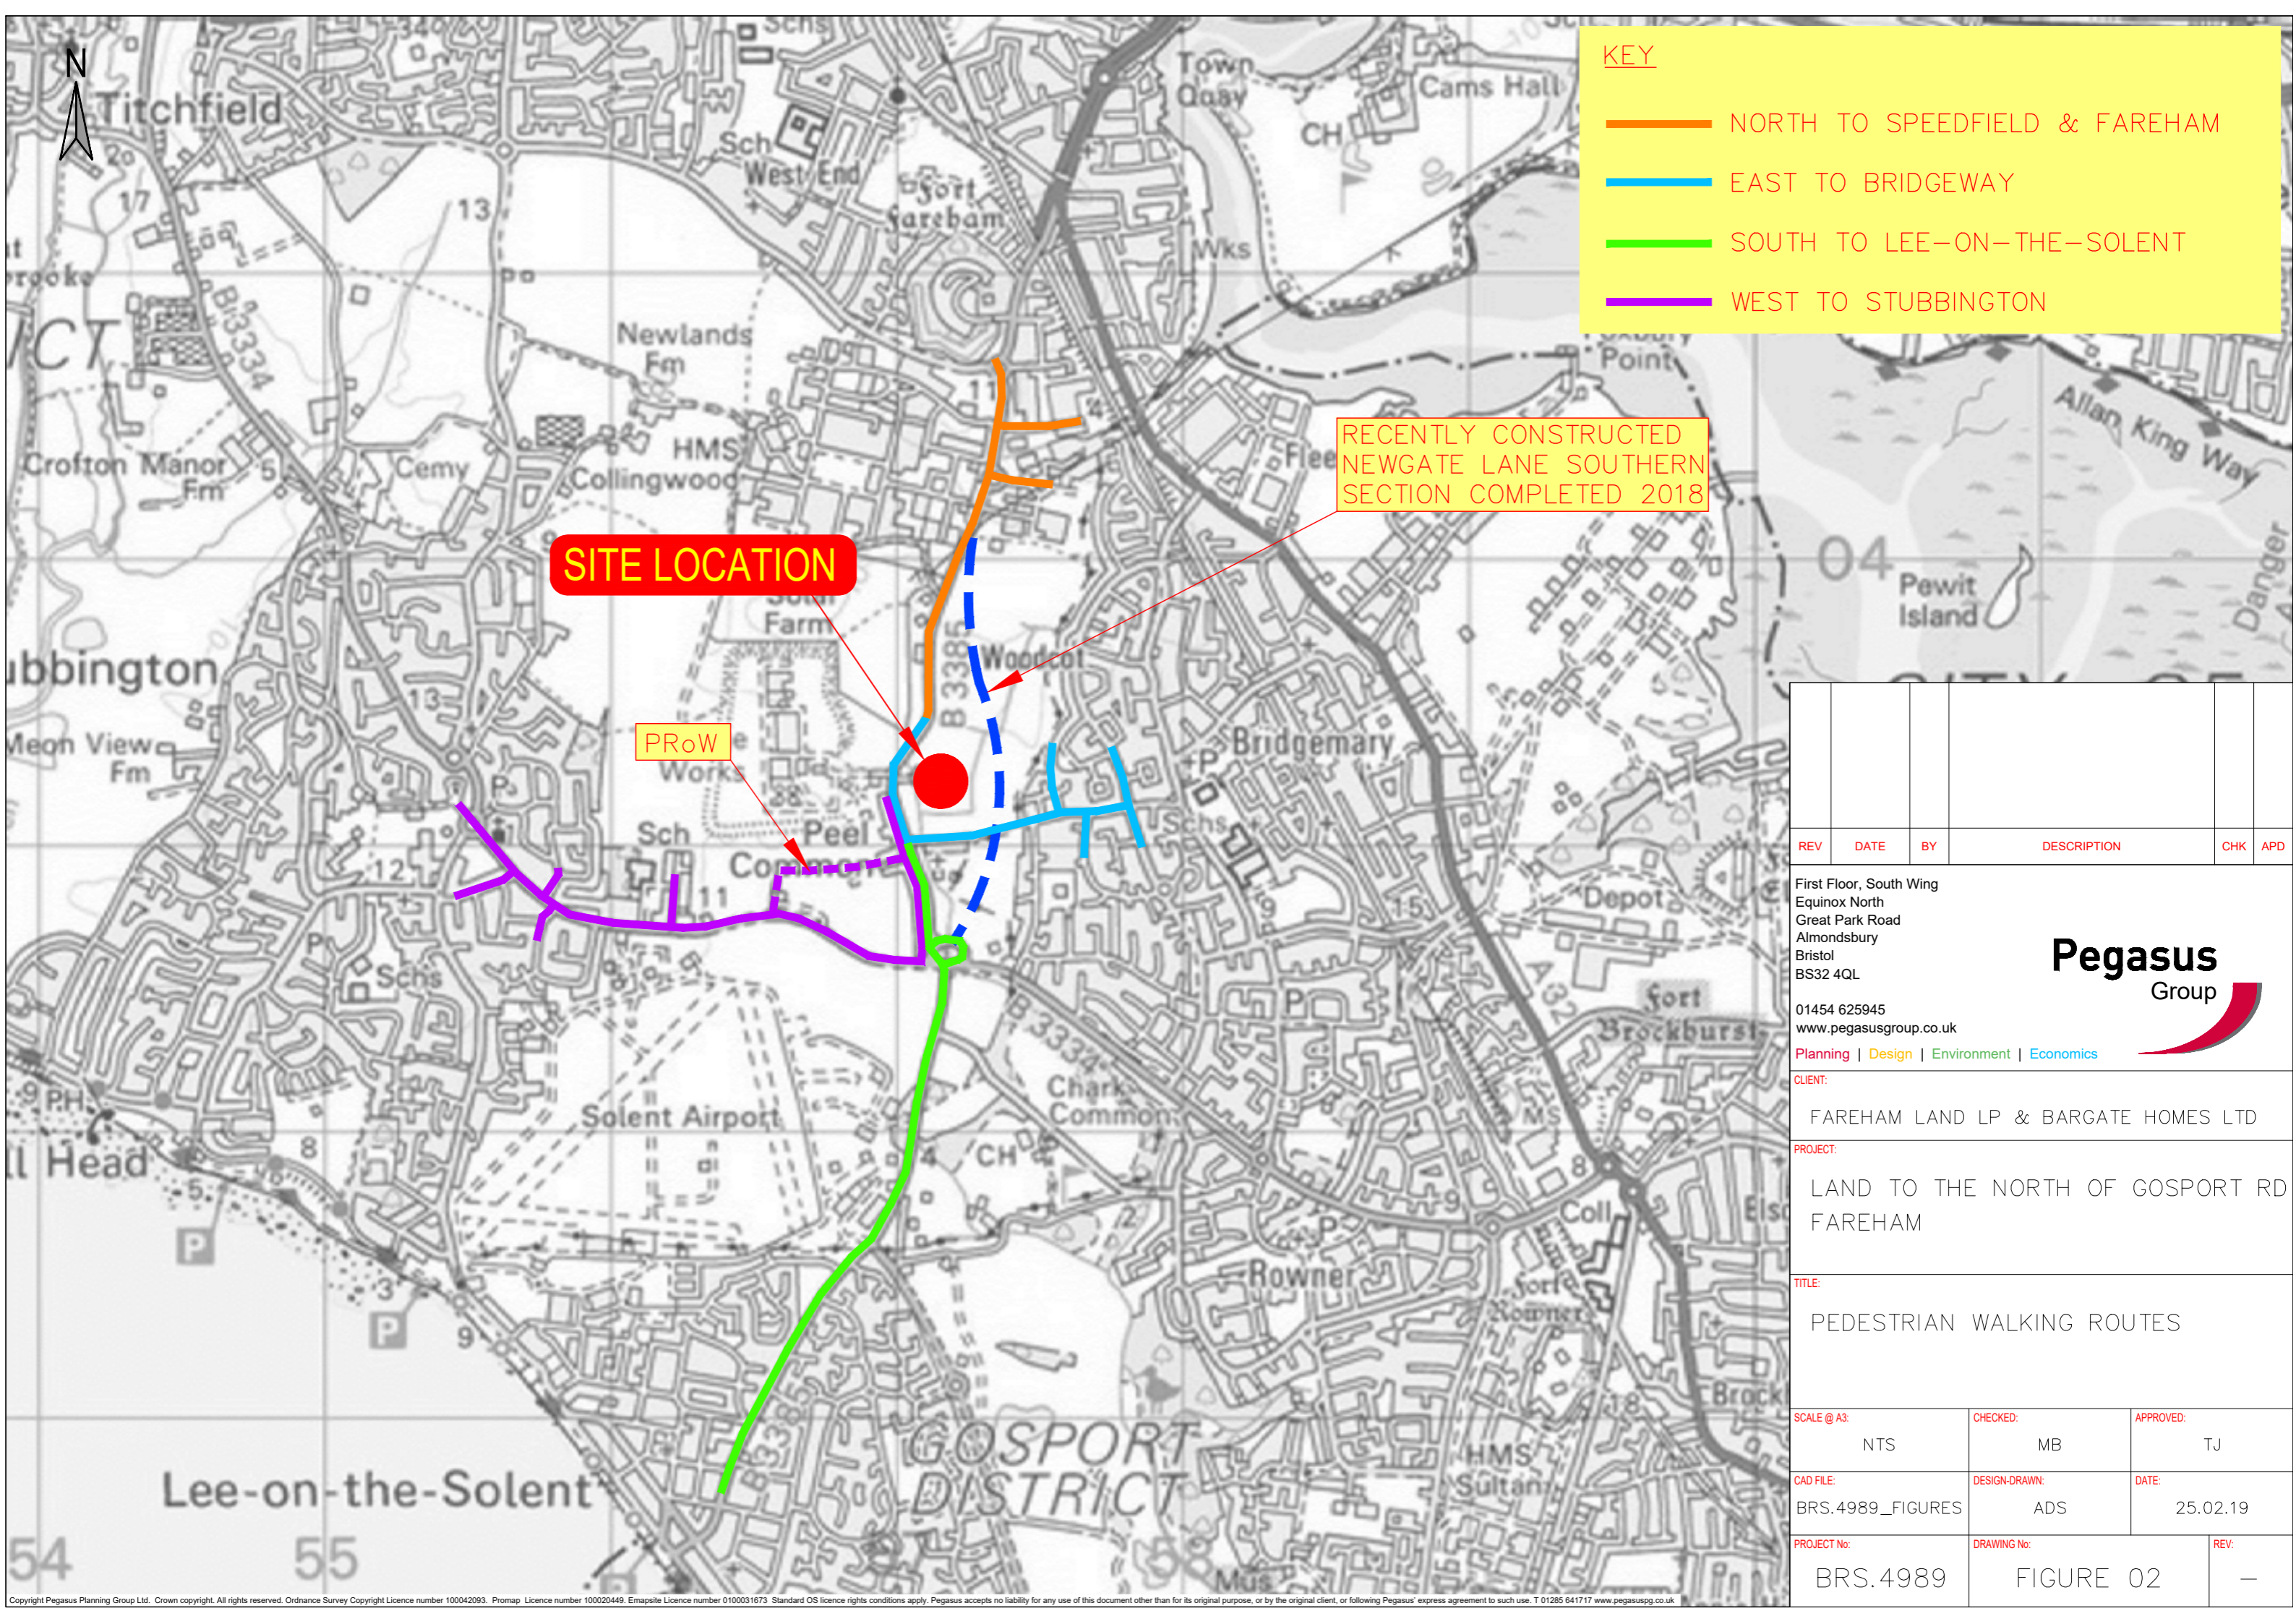

**KEY**

- NORTH TO SPEEDFIELD & FAREHAM
- EAST TO BRIDGEWAY
- SOUTH TO LEE-ON-THE-SOLENT
- WEST TO STUBBINGTON


RECENTLY CONSTRUCTED  
NEWGATE LANE SOUTHERN  
SECTION COMPLETED 2018

**SITE LOCATION**

PROW

REV	DATE	BY	DESCRIPTION	CHK	APD
<p>First Floor, South Wing Equinox North Great Park Road Almondsbury Bristol BS32 4QL</p> <p><b>Pegasus Group</b></p> <p>01454 625945 www.pegasusgroup.co.uk</p> <p>Planning   Design   Environment   Economics</p>					
<p>CLIENT: FAREHAM LAND LP &amp; BARGATE HOMES LTD</p>					
<p>PROJECT: LAND TO THE NORTH OF GOSPORT RD FAREHAM</p>					
<p>TITLE: PEDESTRIAN WALKING ROUTES</p>					
<p>SCALE @ A3: NTS</p>			<p>CHECKED: MB</p>		<p>APPROVED: TJ</p>
<p>CAD FILE: BRS.4989_FIGURES</p>			<p>DESIGN-DRAWN: ADS</p>		<p>DATE: 25.02.19</p>
<p>PROJECT No: BRS.4989</p>			<p>DRAWING No: FIGURE 02</p>		<p>REV: —</p>

**FIGURE 3**  
**LOCAL CYCLE NETWORK**

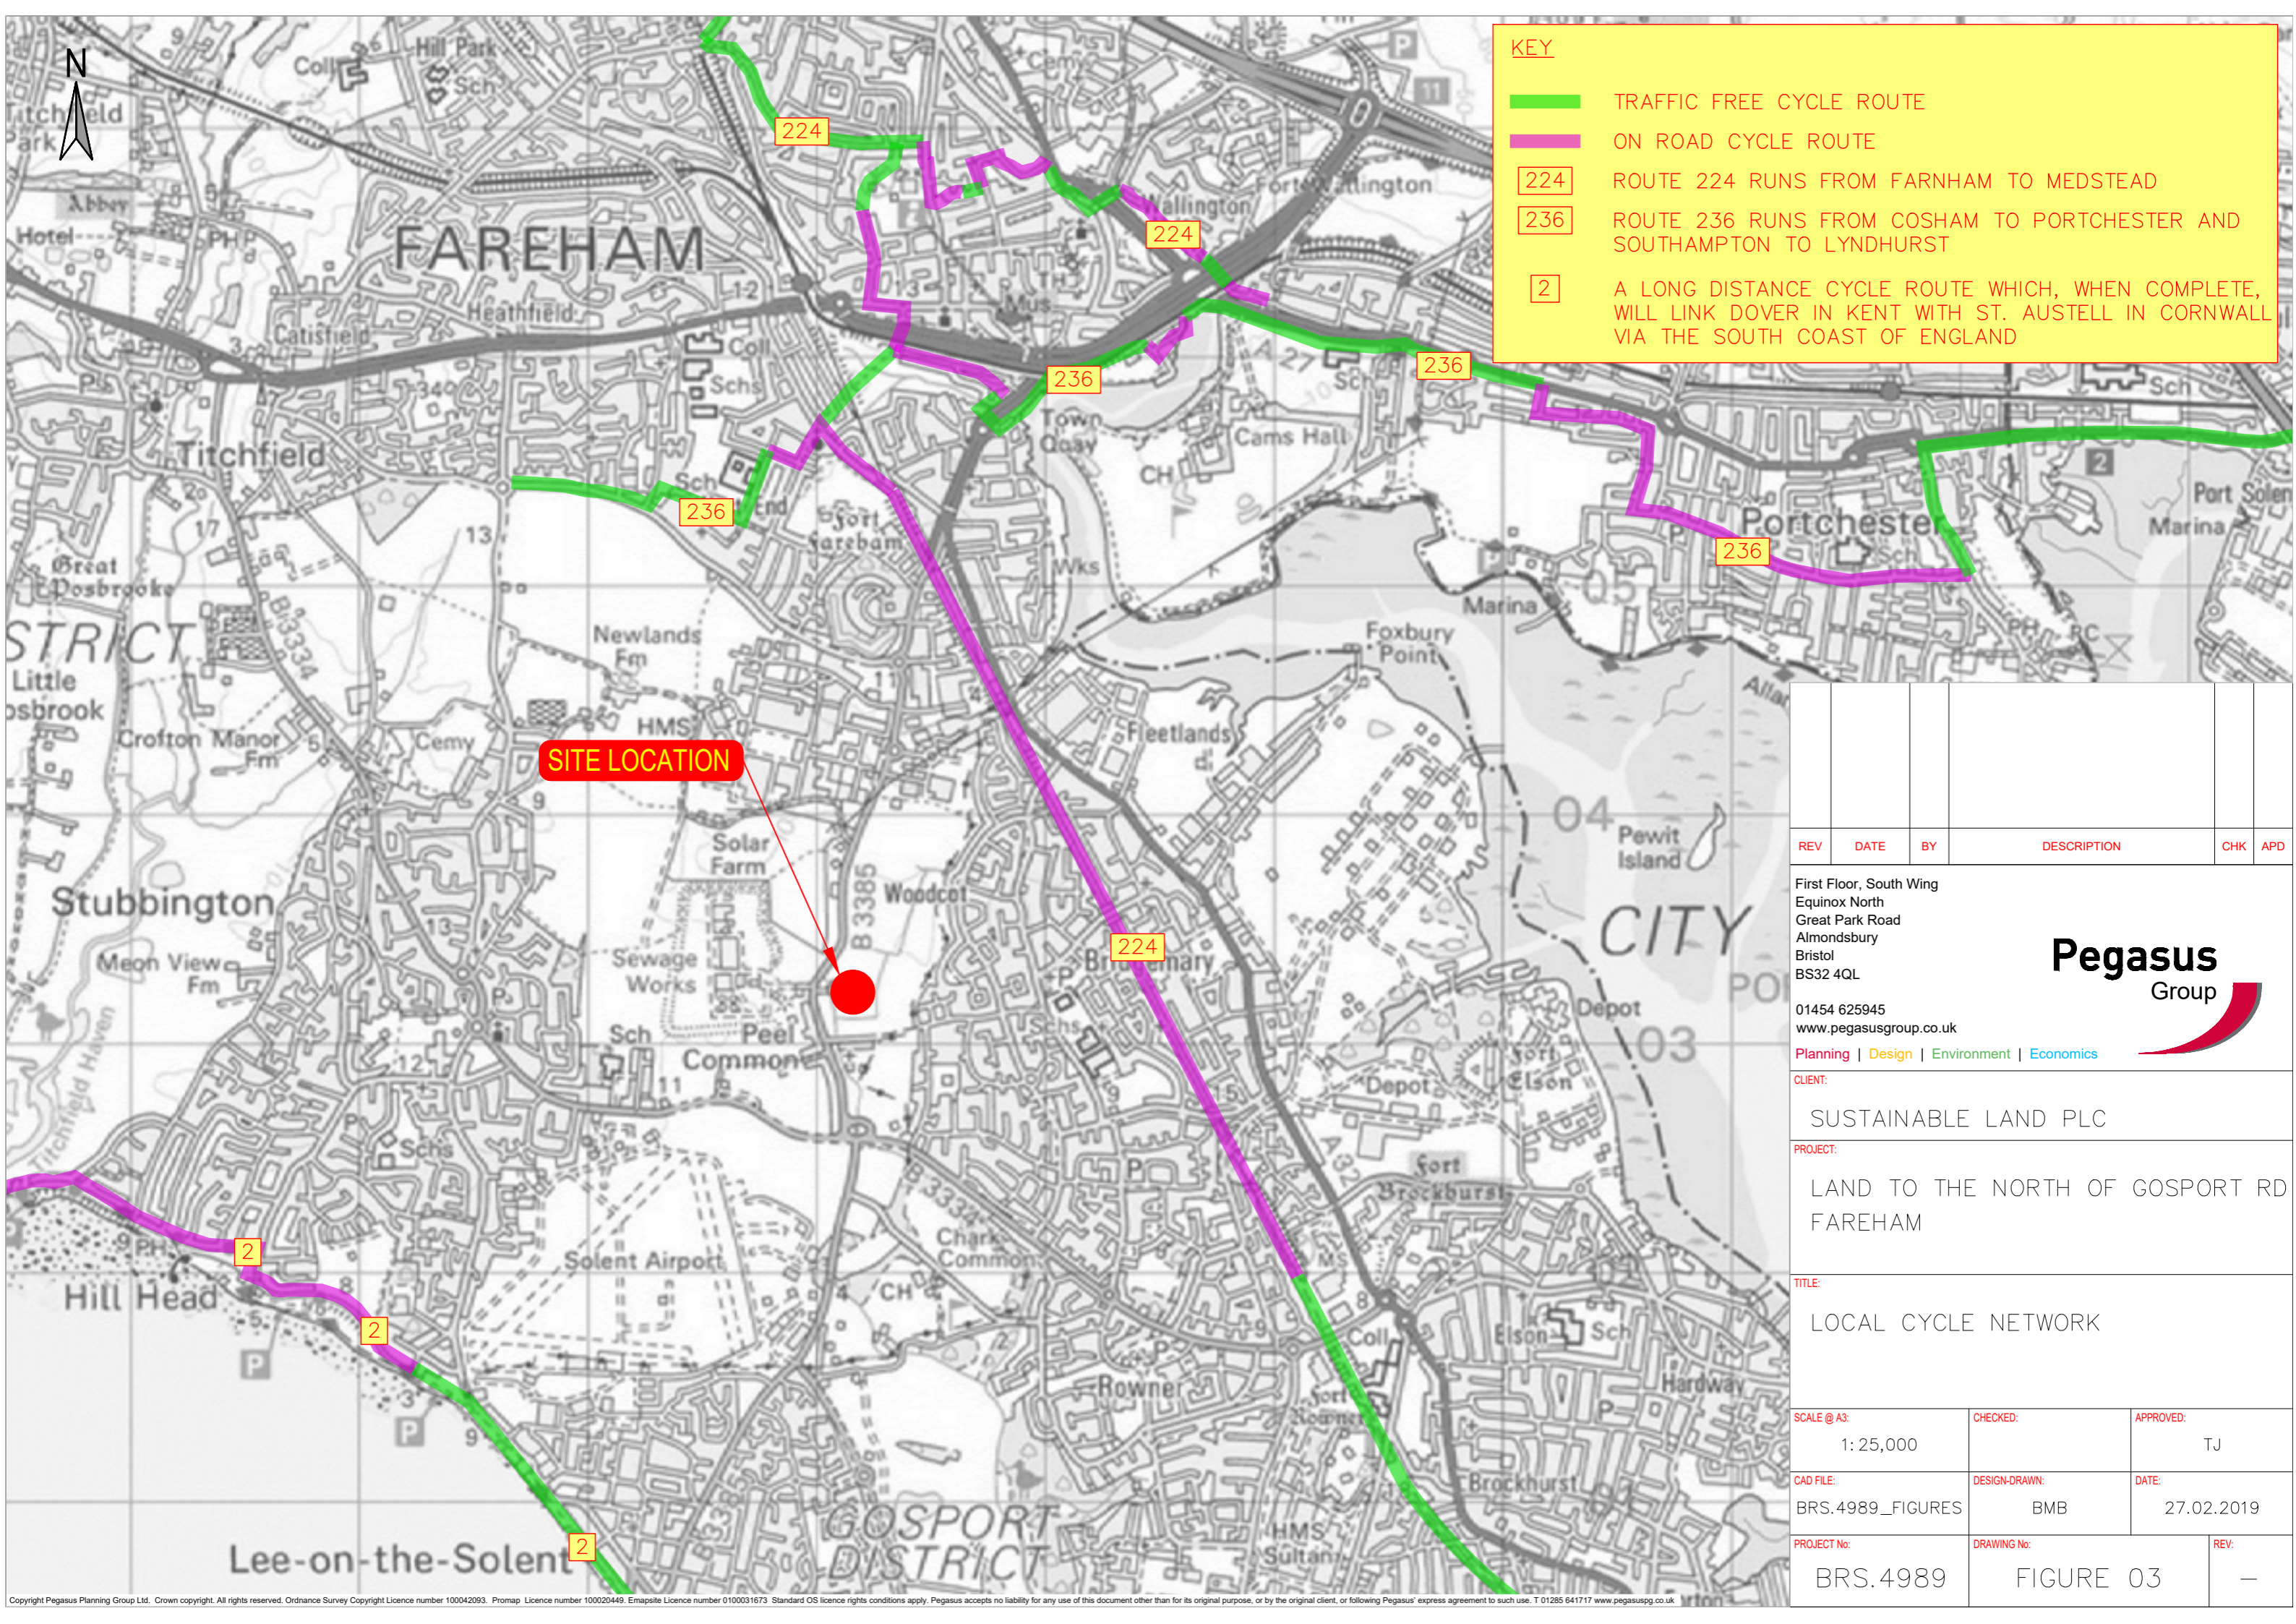


**KEY**

- █ TRAFFIC FREE CYCLE ROUTE
- █ ON ROAD CYCLE ROUTE
- 224 ROUTE 224 RUNS FROM FARNHAM TO MEDSTEAD
- 236 ROUTE 236 RUNS FROM COSHAM TO PORTCHESTER AND SOUTHAMPTON TO LYNDHURST
- 2 A LONG DISTANCE CYCLE ROUTE WHICH, WHEN COMPLETE, WILL LINK DOVER IN KENT WITH ST. AUSTELL IN CORNWALL VIA THE SOUTH COAST OF ENGLAND

**SITE LOCATION**

REV	DATE	BY	DESCRIPTION	CHK	APD
<p>First Floor, South Wing Equinox North Great Park Road Almondsbury Bristol BS32 4QL</p> <p><b>Pegasus Group</b></p> <p>01454 625945 www.pegasusgroup.co.uk</p> <p>Planning   Design   Environment   Economics</p>					
<p>CLIENT: SUSTAINABLE LAND PLC</p>					
<p>PROJECT: LAND TO THE NORTH OF GOSPORT RD FAREHAM</p>					
<p>TITLE: LOCAL CYCLE NETWORK</p>					
<p>SCALE @ A3: 1: 25,000</p>			<p>CHECKED:  </p>		<p>APPROVED: TJ</p>
<p>CAD FILE: BRS.4989_FIGURES</p>		<p>DESIGN-DRAWN: BMB</p>		<p>DATE: 27.02.2019</p>	
<p>PROJECT No: BRS.4989</p>			<p>DRAWING No: FIGURE 03</p>		<p>REV: —</p>

**FIGURE 4**  
**ISOCHRONES AND LOCAL AMENITIES PLAN**

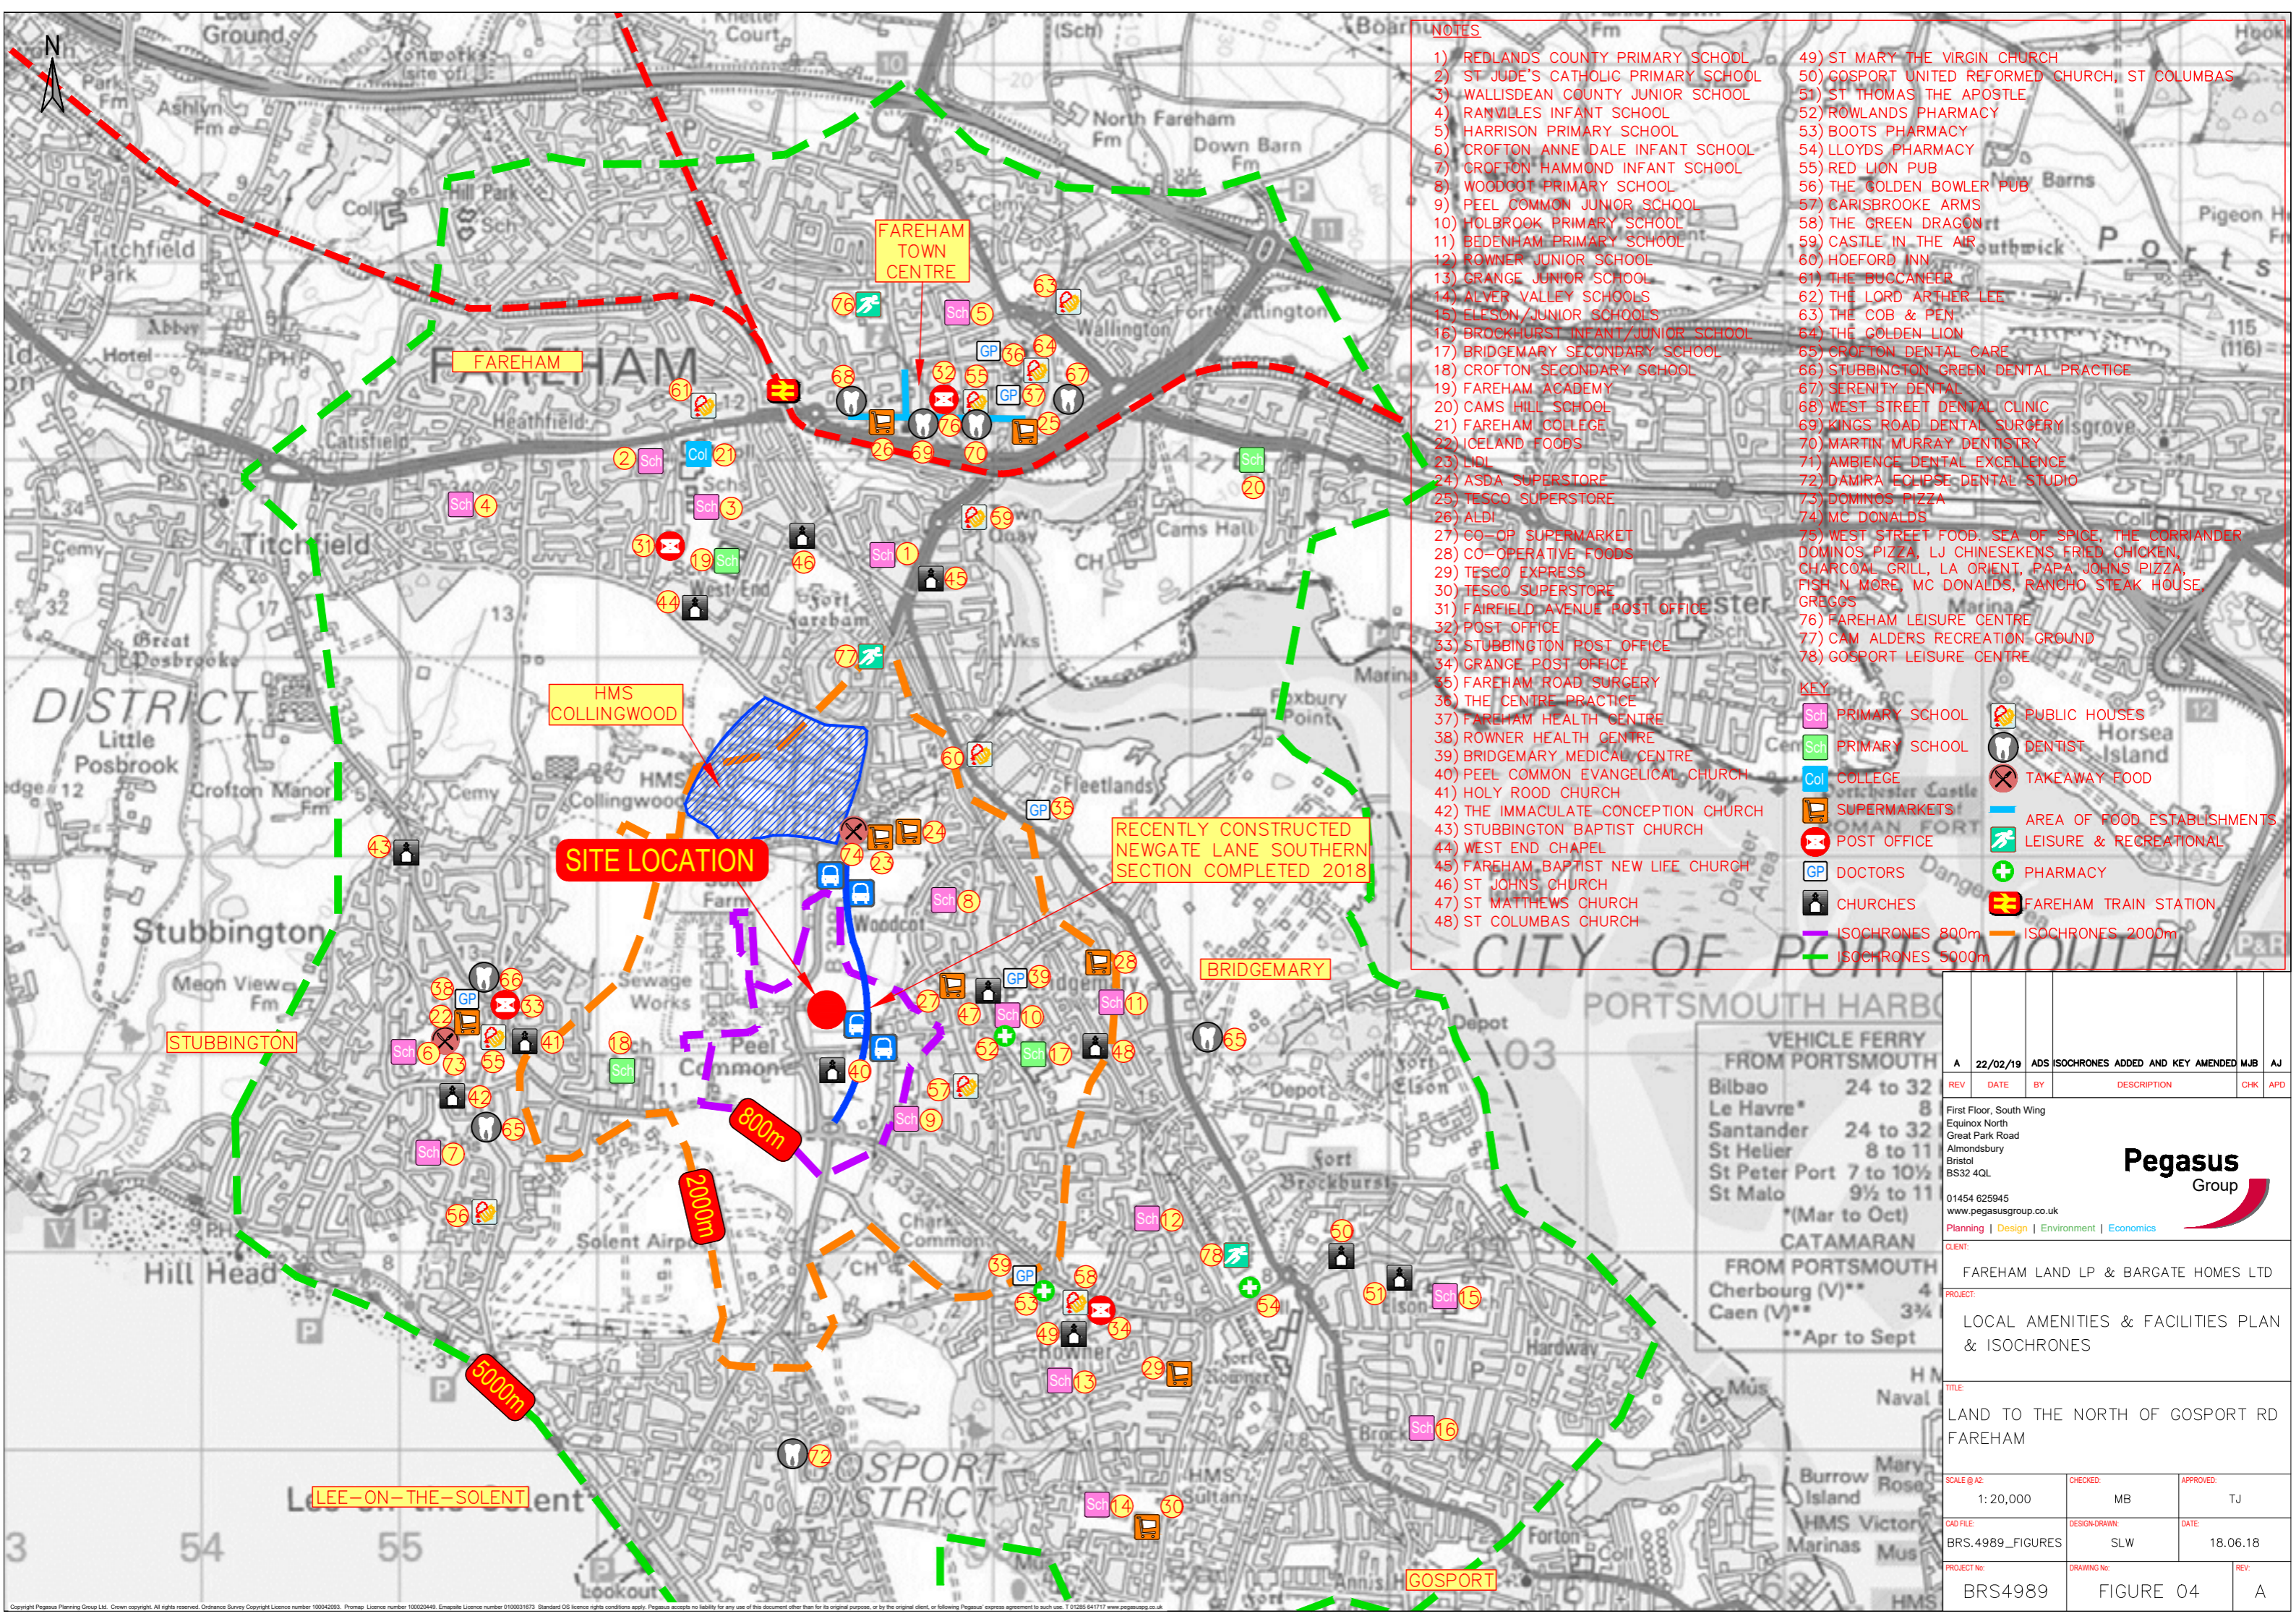

- NOTES**
- 1) REDLANDS COUNTY PRIMARY SCHOOL
  - 2) ST JUDE'S CATHOLIC PRIMARY SCHOOL
  - 3) WALLISDEAN COUNTY JUNIOR SCHOOL
  - 4) RANVILLES INFANT SCHOOL
  - 5) HARRISON PRIMARY SCHOOL
  - 6) CROFTON ANNE DALE INFANT SCHOOL
  - 7) CROFTON HAMMOND INFANT SCHOOL
  - 8) WOODCOT PRIMARY SCHOOL
  - 9) PEEL COMMON JUNIOR SCHOOL
  - 10) HOLBROOK PRIMARY SCHOOL
  - 11) BEDENHAM PRIMARY SCHOOL
  - 12) ROWNER JUNIOR SCHOOL
  - 13) GRANGE JUNIOR SCHOOL
  - 14) ALVER VALLEY SCHOOLS
  - 15) ELESON/JUNIOR SCHOOLS
  - 16) BROCKHURST INFANT/JUNIOR SCHOOL
  - 17) BRIDGEMARY SECONDARY SCHOOL
  - 18) CROFTON SECONDARY SCHOOL
  - 19) FAREHAM ACADEMY
  - 20) CAMS HILL SCHOOL
  - 21) FAREHAM COLLEGE
  - 22) ICELAND FOODS
  - 23) LIDL
  - 24) ASDA SUPERSTORE
  - 25) TESCO SUPERSTORE
  - 26) ALDI
  - 27) CO-OP SUPERMARKET
  - 28) CO-OPERATIVE FOODS
  - 29) TESCO EXPRESS
  - 30) TESCO SUPERSTORE
  - 31) FAIRFIELD AVENUE POST OFFICE
  - 32) POST OFFICE
  - 33) STUBBINGTON POST OFFICE
  - 34) GRANGE POST OFFICE
  - 35) FAREHAM ROAD SURGERY
  - 36) THE CENTRE PRACTICE
  - 37) FAREHAM HEALTH CENTRE
  - 38) ROWNER HEALTH CENTRE
  - 39) BRIDGEMARY MEDICAL CENTRE
  - 40) PEEL COMMON EVANGELICAL CHURCH
  - 41) HOLY ROOD CHURCH
  - 42) THE IMMACULATE CONCEPTION CHURCH
  - 43) STUBBINGTON BAPTIST CHURCH
  - 44) WEST END CHAPEL
  - 45) FAREHAM BAPTIST NEW LIFE CHURCH
  - 46) ST JOHN'S CHURCH
  - 47) ST MATTHEWS CHURCH
  - 48) ST COLUMBAS CHURCH
  - 49) ST MARY THE VIRGIN CHURCH
  - 50) GOSPORT UNITED REFORMED CHURCH, ST COLUMBAS
  - 51) ST THOMAS THE APOSTLE
  - 52) ROWLANDS PHARMACY
  - 53) BOOTS PHARMACY
  - 54) LLOYDS PHARMACY
  - 55) RED LION PUB
  - 56) THE GOLDEN BOWLER PUB
  - 57) CARISBROOKE ARMS
  - 58) THE GREEN DRAGON
  - 59) CASTLE IN THE AIR
  - 60) HOEFORD INN
  - 61) THE BUCCANEER
  - 62) THE LORD ARTHUR LEE
  - 63) THE COB & PEN
  - 64) THE GOLDEN LION
  - 65) CROFTON DENTAL CARE
  - 66) STUBBINGTON GREEN DENTAL PRACTICE
  - 67) SERENITY DENTAL
  - 68) WEST STREET DENTAL CLINIC
  - 69) KINGS ROAD DENTAL SURGERY
  - 70) MARTIN MURRAY DENTISTRY
  - 71) AMBIENCE DENTAL EXCELLENCE
  - 72) DAMIRA ECLIPSE DENTAL STUDIO
  - 73) DOMINOS PIZZA
  - 74) MC DONALDS
  - 75) WEST STREET FOOD: SEA OF SPICE, THE CORRIANDER, DOMINOS PIZZA, LJ CHINESEKENS FRIED CHICKEN, CHARCOAL GRILL, LA ORIENT, PAPA JOHN'S PIZZA, FISH N MORE, MC DONALDS, RANCHO STEAK HOUSE, GREGGS
  - 76) FAREHAM LEISURE CENTRE
  - 77) CAM ALDERS RECREATION GROUND
  - 78) GOSPORT LEISURE CENTRE
- KEY**
- Sch PRIMARY SCHOOL
  - Sch PRIMARY SCHOOL
  - Col COLLEGE
  - GP SUPERMARKETS
  - Post Office POST OFFICE
  - GP DOCTORS
  - Churches CHURCHES
  - Public Houses PUBLIC HOUSES
  - Dentist DENTIST
  - Takeaway Food TAKEAWAY FOOD
  - Area of Food Establishments AREA OF FOOD ESTABLISHMENTS
  - Leisure & Recreational LEISURE & RECREATIONAL
  - Pharmacy PHARMACY
  - Fareham Train Station FAREHAM TRAIN STATION
  - Isochrones 800m ISOCHRONES 800m
  - Isochrones 2000m ISOCHRONES 2000m
  - Isochrones 5000m ISOCHRONES 5000m

REV	DATE	BY	DESCRIPTION	CHK	APP
A	22/02/19	ADS	ISOCHRONES ADDED AND KEY AMENDED	MJB	AJ

First Floor, South Wing Equinox North Great Park Road Almondsbury Bristol BS32 4QL 01454 625945 www.pegasusgroup.co.uk Planning   Design   Environment   Economics	
--	--

CLIENT:  
FAREHAM LAND LP & BARGATE HOMES LTD


PROJECT:  
LOCAL AMENITIES & FACILITIES PLAN & ISOCHRONES

TITLE:  
LAND TO THE NORTH OF GOSPORT RD FAREHAM

SCALE @ A2: 1:20,000	CHECKED: MB	APPROVED: TJ
GAD FILE: BRS.4989_FIGURES	DESIGN-DRAWN: SLW	DATE: 18.06.18
PROJECT No: BRS4989	DRAWING No: FIGURE 04	REV: A

**FIGURE 5**  
**LOCAL BUS ROUTES**



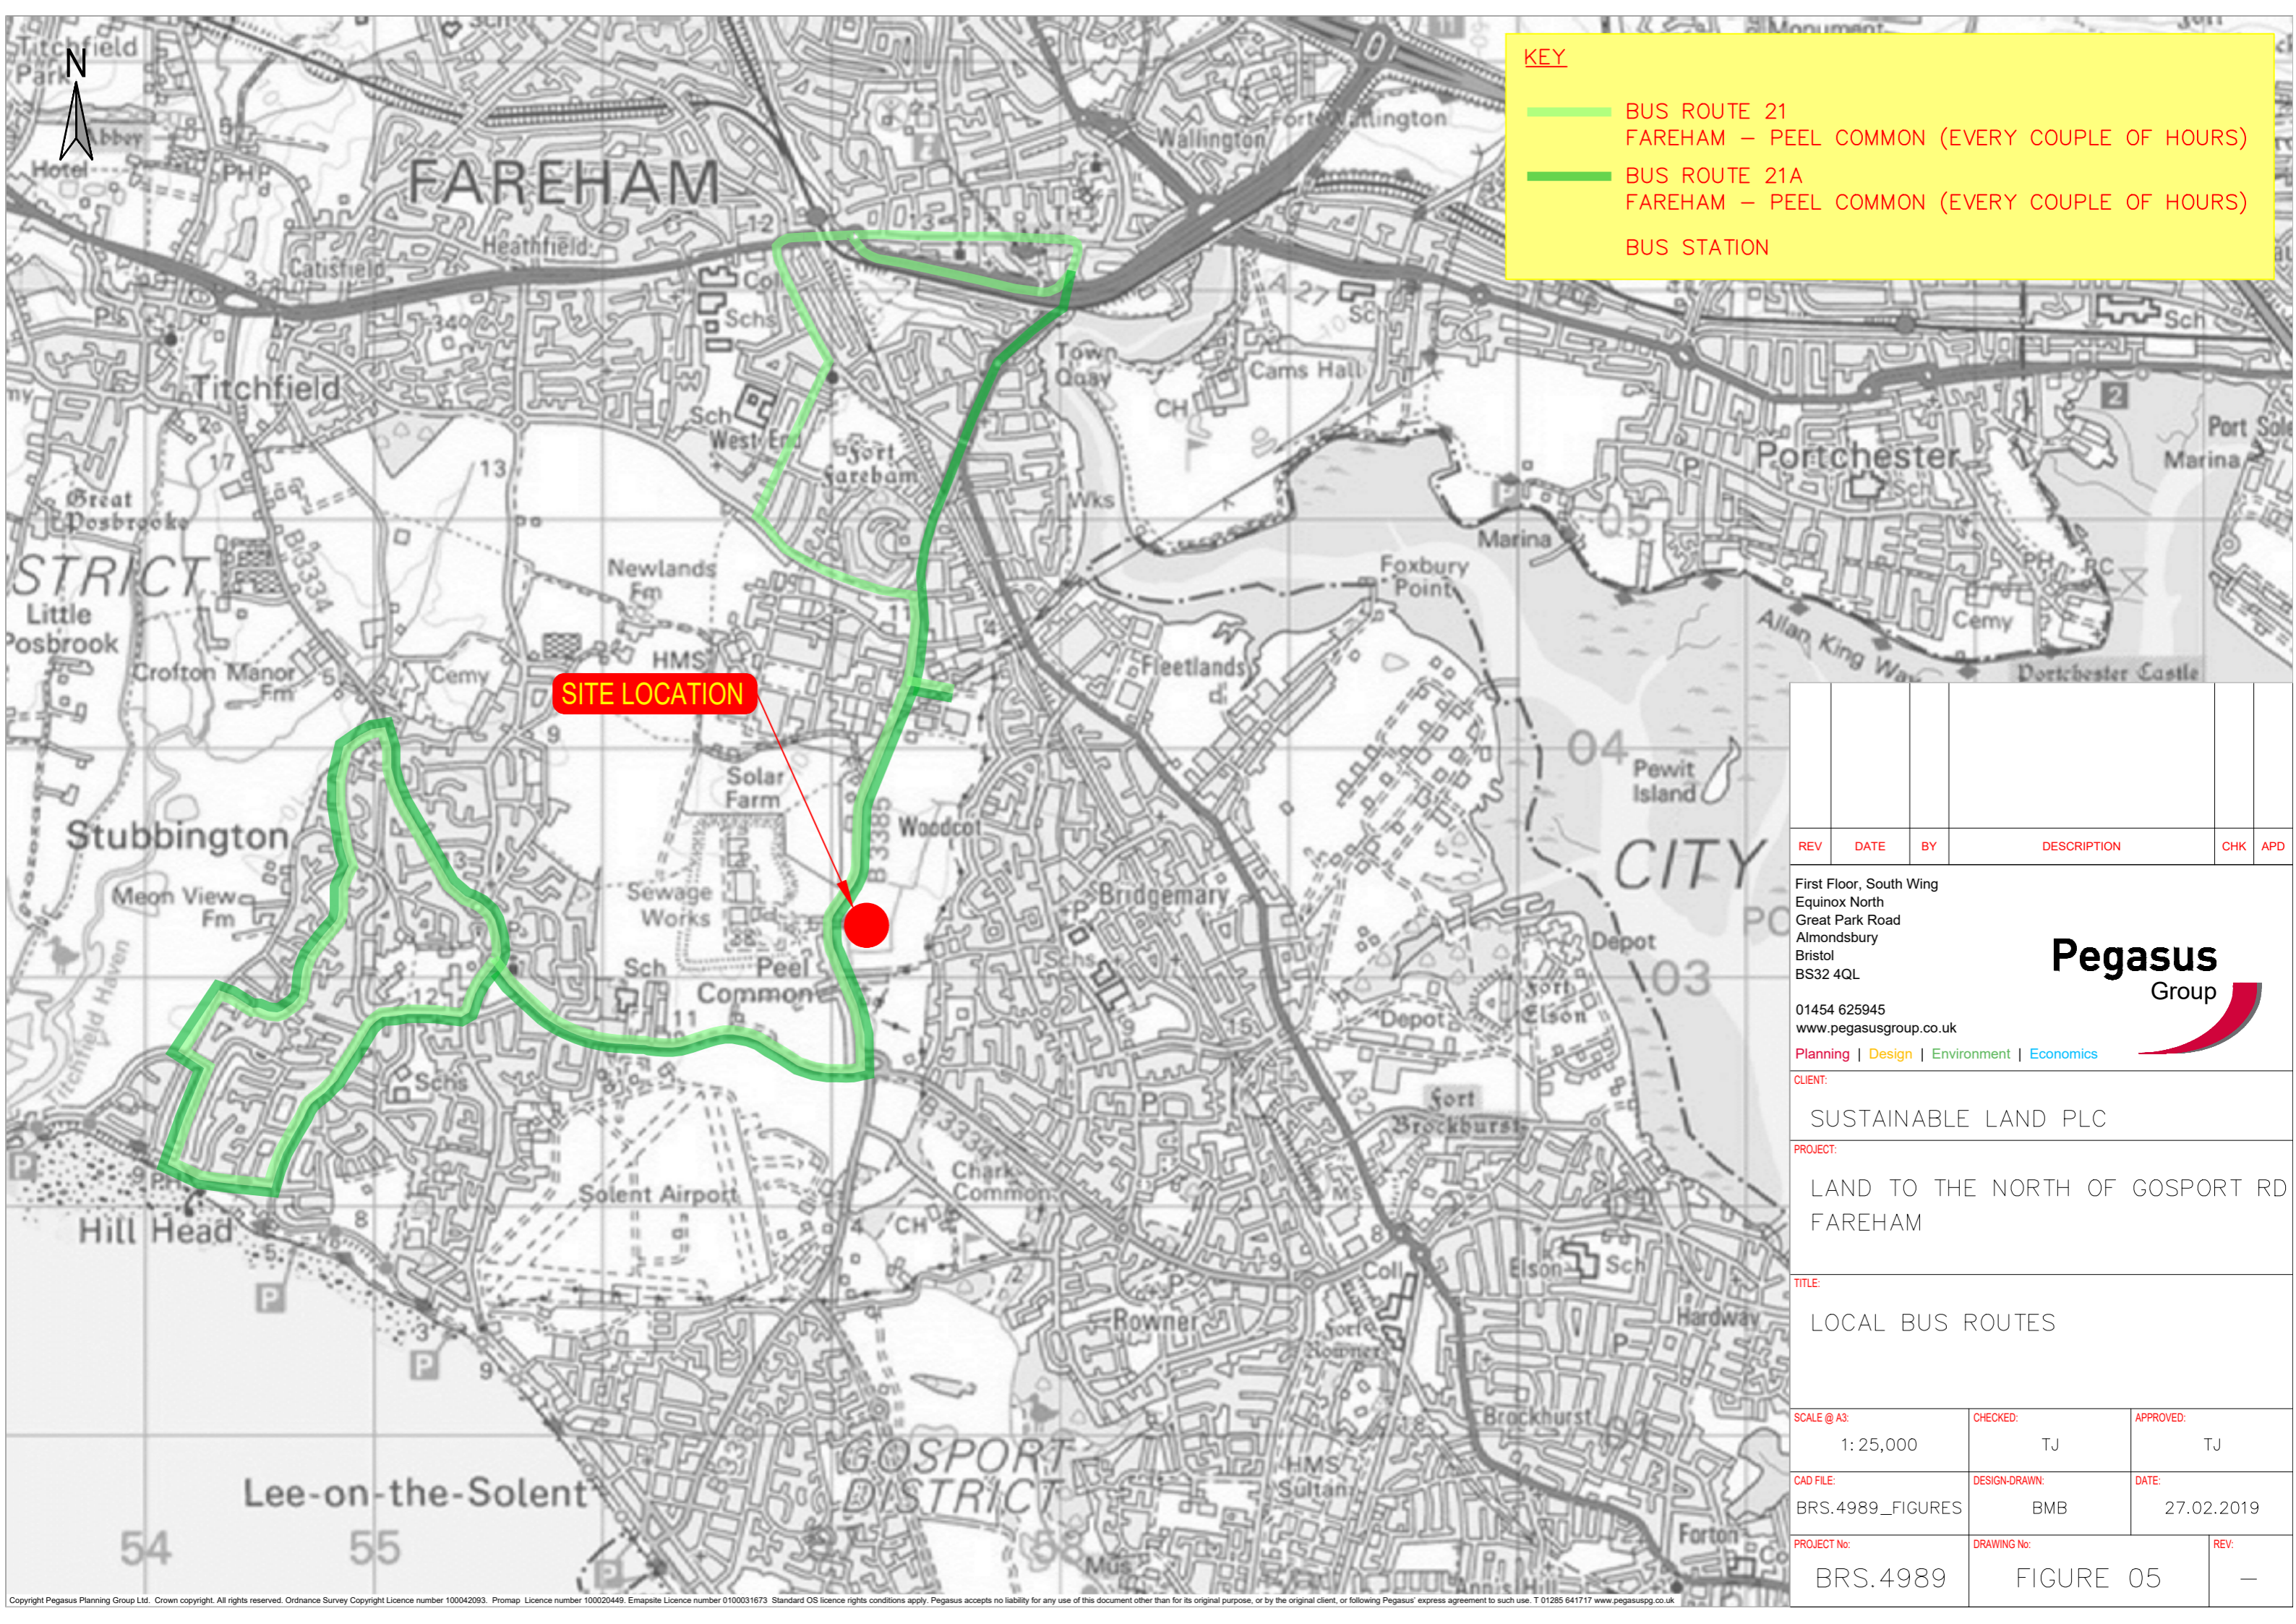

**KEY**

- BUS ROUTE 21  
FAREHAM – PEEL COMMON (EVERY COUPLE OF HOURS)
- BUS ROUTE 21A  
FAREHAM – PEEL COMMON (EVERY COUPLE OF HOURS)
- BUS STATION

**SITE LOCATION**

REV	DATE	BY	DESCRIPTION	CHK	APD

First Floor, South Wing  
Equinox North  
Great Park Road  
Almondsbury  
Bristol  
BS32 4QL

**Pegasus Group**

01454 625945  
www.pegasusgroup.co.uk

Planning | Design | Environment | Economics

CLIENT:  
SUSTAINABLE LAND PLC

PROJECT:  
LAND TO THE NORTH OF GOSPORT RD  
FAREHAM

TITLE:  
LOCAL BUS ROUTES

SCALE @ A3: 1:25,000

CHECKED: TJ

APPROVED: TJ

CAD FILE: BRS.4989\_FIGURES

DESIGN-DRAWN: BMB

DATE: 27.02.2019

PROJECT No: BRS.4989

DRAWING No: FIGURE 05

REV: —

## **APPENDIX 6**

### **HCC TRICS FROM NLSRR TA**

TRICS7.1.1

Trip Rate Paramet Number of dwellings

TRIP RATE CALCULATION SELECTION PARAMETERS

Land Use 03 - RESIDENTIAL  
Category A - HOUSES PRIVATELY OWNED  
VEHICLES

Selected regions and areas:

2 SOUTH EAST  
BD BEDFORDS 2 days  
3 SOUTH WEST  
CW CORNWALL 1 days  
DC DORSET 1 days  
4 EAST ANGLIA  
NF NORFOLK 1 days  
SF SUFFOLK 1 days  
5 EAST MIDLANDS  
LN LINCOLNSH 1 days  
NT NOTTINGHAM 1 days  
6 WEST MIDLANDS  
SH SHROPSHIRE 1 days  
WO WORCESTER 1 days

This section displays the number of survey days per TRICS sub-region in the selected set

Filtering Stage 2 selection:

This data displays the chosen trip rate parameter and its selected range. Only sites that fall within the parameter range are included in the trip rate calculation.

Parameter: Number of dwellings  
Actual Range: 27 to 166 (units: )  
Range Selected by 25 to 200 (units: )

Public Transport Provision:

Selection by: Include all surveys

Date Range: 01/01/04 to 22/10/12

This data displays the range of survey dates selected. Only surveys that were conducted within this date range are included in the trip rate calculation.

Selected survey days:

Tuesday 5 days  
Wednesday 3 days  
Thursday 2 days

This data displays the number of selected surveys by day of the week.

Selected survey types:

Manual count 10 days  
Directional ATC 0 days

This data displays the total amount whilst ATC surveys are undertaken using machines.

Selected Locations:

Town Centre	0
Edge of Town Cen	0
Suburban Area (Pl	7
Edge of Town	3
Neighbourhood C	0
Free Standing (PP	0
Not Known	0

This data displays Edge of To Suburban , Neighbour Edge of To Town Centre and Not Known.

Selected Location Sub Categories:

Industrial Zone	0
Commercial Zone	0
Development Zon	0
Residential Zone	8
Retail Zone	0
Built-Up Zone	0
Village	0
Out of Town	0
High Street	0
No Sub Category	2

Filtering Stage 3 selection:

Use Class:

C3 10 days

This data displays which can be found within the Library module of TRICS®

Population within 1 mile:

5,001 to 10,000	2 days
10,001 to 15,000	1 days
15,001 to 20,000	3 days
20,001 to 25,000	1 days
25,001 to 50,000	3 days

This data displays the number of selected surveys within stated 1-mile radii of population.

Population within 5 miles:

25,001 to 50,000	1 days
50,001 to 75,000	1 days
75,001 to 100,001	1 days
100,001 to 125,00	2 days
125,001 to 250,00	4 days
250,001 to 500,00	1 days

This data displays the number of selected surveys within stated 5-mile radii of population.

Car ownership within 5 miles:

0.6 to 1.0	3 days
1.1 to 1.5	7 days

This data displays within a radius of 5-miles of selected survey sites.

Travel Plan:

No 10 days

This data displays and the number of surveys that were undertaken at sites without Travel Plans.

LIST OF SITES relevant to selection parameters

1 BD-03-A-01 SEMI DETACHED BEDFORDSHIRE  
NEW BEDFORD ROAD

LUTON

Suburban Area (PPS6 Out of Centre)

Residential Zone

Total Number of dwellings 131

Survey date THURSDAY ##### Survey Type MANUAL

2 BD-03-A-02 SEMI DETACHED BEDFORDSHIRE  
RIDDY LANE

LUTON

Suburban Area (PPS6 Out of Centre)

Residential Zone

Total Number of dwellings 82

Survey date TUESDAY ##### Survey Type MANUAL

3 CW-03-A-03 SEMI DETACHED CORNWALL  
BOSVEAN GARDENS

TRURO

Suburban Area (PPS6 Out of Centre)

Residential Zone

Total Number of dwellings 73

Survey date TUESDAY ##### Survey Type MANUAL

4 DC-03-A-01 DETACHED DORSET  
ISAACS CLOSE

POOLE

Suburban Area (PPS6 Out of Centre)

Residential Zone

Total Number of dwellings 51

Survey date WEDNESDAY ##### Survey Type MANUAL

5 LN-03-A-01 MIXED HOUSING LINCOLNSHIRE  
BRANT ROAD

BRACEBRIDGE

LINCOLN

Edge of Town

Residential Zone

Total Number of dwellings 150

Survey date TUESDAY ##### Survey Type MANUAL

6 NF-03-A-01 SEMI DETACHED NORFOLK  
YARMOUTH ROAD

CAISTER-ON-SEA

Suburban Area (PPS6 Out of Centre)

Residential Zone

Total Number of dwellings 27

Survey date TUESDAY ##### Survey Type MANUAL

7 NT-03-A-03 SEMI DETA NOTTINGHAMSHIRE  
B6018 SUTTON ROAD

KIRKBY-IN-ASHFIELD

Edge of Town

Residential Zone

Total Number of dwelli 166

Survey date WEDNESDAY ##### Survey Type MANUAL

8 SF-03-A-01 SEMI DETA SUFFOLK

A1156 FELIXSTOWE ROAD

RACECOURSE

IPSWICH

Suburban Area (PPS6 Out of Centre)

Residential Zone

Total Number of dwelli 77

Survey date WEDNESDAY ##### Survey Type MANUAL

9 SH-03-A-04 TERRACED SHROPSHIRE

ST MICHAEL'S STREET

SHREWSBURY

Suburban Area (PPS6 Out of Centre)

No Sub Category

Total Number of dwelli 108

Survey date THURSDAY ##### Survey Type MANUAL

10 WO-03-A-0 SEMI DETA WORCESTERSHIRE

MEADOWHILL ROAD

REDDITCH

Edge of Town

No Sub Category

Total Number of dwelli 48

Survey date TUESDAY ##### Survey Type MANUAL

TRIP RATE for Land Use 03 - RESIDENTIAL/ A - HOUSES PRIVATELY OWNED

Calculation Factor: 1 DWELLS

Count Type: VEHICLES

Time Range	No. Days	ARRIVALS			No. Days	DEPARTURES		No. Days	TOTALS	
		Ave. DWELLS	Trip Rate			Ave. DWELLS	Trip Rate		Ave. DWELLS	Trip Rate
00:00-01:00										
01:00-02:00										
02:00-03:00										
03:00-04:00										
04:00-05:00										
05:00-06:00										
06:00-07:00										
07:00-08:00		10	91	0.068	10	91	0.318	10	91	0.386
08:00-09:00		10	91	0.165	10	91	0.4	10	91	0.565
09:00-10:00		10	91	0.179	10	91	0.251	10	91	0.43
10:00-11:00		10	91	0.157	10	91	0.208	10	91	0.365
11:00-12:00		10	91	0.218	10	91	0.209	10	91	0.427
12:00-13:00		10	91	0.203	10	91	0.206	10	91	0.409
13:00-14:00		10	91	0.186	10	91	0.195	10	91	0.381
14:00-15:00		10	91	0.205	10	91	0.188	10	91	0.393
15:00-16:00		10	91	0.309	10	91	0.218	10	91	0.527
16:00-17:00		10	91	0.308	10	91	0.208	10	91	0.516
17:00-18:00		10	91	0.386	10	91	0.243	10	91	0.629
18:00-19:00		10	91	0.299	10	91	0.232	10	91	0.531
19:00-20:00										
20:00-21:00										
21:00-22:00										
22:00-23:00										
23:00-24:00										
Daily Trip Rates:				2.683			2.876			5.559

Parameter summary

Trip rate parameter: 27 - 166 (units: )

Survey date range: 01/01/04 - 22/10/12

Number of weekdays: 10

Number of Saturdays: 0

Number of Sundays: 0

Surveys manually: 0

## **APPENDIX 7**

### **HCC CORRESPONDANCE**



## Phil Wragg

---

**From:** Phil Wragg  
**Sent:** 08 June 2018 17:46  
**To:** Phil Wragg  
**Subject:** FW: Land West of Newgate Lane Pre-App Response

### Philip Wragg

Senior Transport Planner

### Pegasus Group

PLANNING | DESIGN | ENVIRONMENT | ECONOMICS

First Floor | South Wing | Equinox North | Great Park Road | Almondsbury | Bristol | BS32 4QL

T 01454 625945 | E [Philip.Wragg@pegasusgroup.co.uk](mailto:Philip.Wragg@pegasusgroup.co.uk)

M 07583 010645 | DD 01454 800994 | EXT 2025

Birmingham | Bracknell | Bristol | Cambridge | Gloucester | East Midlands | Leeds | Liverpool | London | Manchester | Peterborough



[www.pegasusgroup.co.uk](http://www.pegasusgroup.co.uk)

Pegasus Group is the trading name of Pegasus Planning Group Ltd (102329800) registered in England and Wales.

This email and any associated files, is intended for the exclusive use of the individual(s) named. If you are not the intended recipient you should not use the contents for anything other than to reply.

If you have received this message in error please notify us immediately. We have updated our Privacy Statement to include the GDPR. Please visit [www.pegasusgroup.co.uk](http://www.pegasusgroup.co.uk)



Please consider the environment before printing this email message.

---

**From:** Hirst, Chris [<mailto:Chris.Hirst@hants.gov.uk>]  
**Sent:** 18 April 2018 13:31  
**To:** Tony Jones <[Anthony.Jones@pegasusgroup.co.uk](mailto:Anthony.Jones@pegasusgroup.co.uk)>  
**Cc:** Drury, Holly <[holly.drury@hants.gov.uk](mailto:holly.drury@hants.gov.uk)>; Morton, Stuart <[Stuart.Morton@hants.gov.uk](mailto:Stuart.Morton@hants.gov.uk)>  
**Subject:** Land West of Newgate Lane Pre-App Response

Dear Tony,

Thank you for your recent pre-application enquiry with regards to the proposed 250 dwelling development for the Land West of Newgate Lane, Fareham. A Transport Scoping Note and access proposal drawings were submitted and this information has now been reviewed. Following this review, we wish to make the following comments based on our understanding of the information presented to date.

#### Local Planning Context, Committed Developments and the Newgate Lane Bypass

The site identified has not been included in Fareham's emerging Local Plan to 2036 and is currently considered a 'strategic gap'.

The development proposal looks to provide access for 250 dwellings from 2 separate priority T-junctions off the old Newgate Lane. Discussions were held regarding the rationale for 2 access points and it is noted that the site is proposed with this arrangement as a result of different land owners coming forward as a consortium. It should be investigated whether a singular access point can be achieved in order to reduce the number of accesses off Newgate Lane and therefore the number of conflict points for cyclists looking to utilise the new cycle path and vehicles accessing the site. If necessary both access options should be submitted as part of the application so they can be fully considered within the application.

There is a 475 dwelling allocation to the east of Newgate Lane which should be considered in any sensitivity works carried out. Other key sites identified in the draft Fareham Local Plan to 2036 should be considered to gain a comprehensive understanding of the evolving traffic situation in Fareham. Sensitivity tests should be carried out for

Stubbington Bypass (which is a committed development) as this will have a bearing on the distribution seen from the site.

It was suggested during discussions that the sensitivity tests will be submitted as an addendum to the Transport Assessment. In order to fully assess the vehicular impact of this site on the local road network, sensitivity tests will be required as part of the main application, especially as Stubbington Bypass is a committed development. Having one comprehensive transport assessment will allow for a full review and response from the Highway Authority, without this information the planning process is likely to become extended.

#### **Proposed Access Strategy for Travel Modes**

As previously mentioned, access to the site is proposed via two priority T-junctions off of the old Newgate Lane. The achievable visibility splays for these junctions should be informed by speed surveys carried out on Newgate Lane. If possible, a singular point of access into the site should be reviewed as this is considered the safer option for accessing the site. Tracking for super large refuse vehicles should be provided, along with pantechnicons (to cater for construction phases) and family cars. It should be demonstrated on any drawings that these vehicles can pass through the access safely.

Due to a lack of traffic flow data and turning proportions for Newgate Lane, we are unable to agree the general principle of access. Flow data and turning proportions proposed in the full TA accompanying the planning application will inform whether the principle of access is acceptable.

During discussions, it was proposed that the priority of the old Newgate Lane was changed to reroute traffic through the southern access point and back out again through the northern access, establishing a 'give way' for those wishing to continue north along the lane. Given that the old Newgate Lane has recently been established as a cycle route (linking the existing provision at Peel Common roundabout to the south and the northern section of Newgate Lane), any changes to the priority would likely be unpopular and go against the revised nature of the road. Newgate Lane South has been open for less than a week, any further changes to the local road layout will be a sensitive topic with local residents and those beginning to utilise the new route.

If a planning application was to come forward with a change to existing arrangement of the road, alternative proposals to encourage cyclists to continue to route along this road should be provided (i.e. providing a north-south cycle link at a revised location). The new cycle link is considered an important option for encouraging sustainable travel in Fareham, maintaining this link is therefore important. A segregated traffic free cycle route could be provided through the site, this should be as direct as possible minimising additional journey time and distance for cyclists.

Given the flows on the old Newgate Lane are now low and serve the existing dwellings, any further development will see a significant increase on the vehicular flows currently experienced on the lane. Further discussions as to the strategy of this road may be required to determine whether the potential increase in vehicular improvements will decrease the appeal of Newgate Lane as a cycle route.

#### **Accessibility**

The local bus route (Z1/21A) is impacted upon by the opening of the new Newgate Lane. This bus service will be redirected along the new route, with new bus stops facilities near Tudor Lodge Nursing Home, near Woodcote Lane/Brookers Lane and Gosport Road, near Peel Common. Sustainable access methods to the site and the surrounding area should consider the updated bus route noted above and also examine the potential for rail travel as a sustainable transport method.

#### **Trip Generation and Trip Rates**

Trip rates for the site should be derived from the TRICS database to determine the expected vehicular activity from the development.

An alternative method for ascertaining trip rates is via Census Travel to Work Data which can split the anticipated forms of transport and assign the percentage of vehicular trips this way.

#### **Traffic Assignment and Distribution**

Trip generation from the site should be distributed at the new Newgate Lane junction to the north to assess how many vehicles will head to the north and south. As discussed, the current layout provides an extended right turn lane and was designed on the basis that no new development would occur off of the old Newgate Lane. Once trip rates and distributions have been researched, this junction will need to be assessed in detail to decide whether any upgrades to the junction will be required to accommodate the additional vehicular flows, taking into consideration the emerging local plan.

During discussions, it was agreed that the following junctions should be modelled: proposed site access(es) off of Newgate Lane, the Newgate Lane/new Newgate Lane junction, Peel Common Roundabout and Longfield Avenue/Newgate Lane roundabout. Following conversation with our survey team, it has been established that there are no recent traffic flow surveys carried out for the Longfield Avenue/Newgate Lane roundabout. Therefore, traffic surveys will need to be carried out at a time that is not impacted upon by the ongoing improvement works to Newgate Lane South. Further information on this point has already been provided. Now Newgate Lane bypass is operational survey data should be collected to determine actual flows at the key junctions and inform the junction assessments. These should be undertaken within a neutral month and outside a time where ongoing completion works may impact the results. Additional junctions may need to be considered for review once the distribution has been agreed.

### **Modelling Scenarios**

The modelling scenarios put forward in the scoping note are considered acceptable but should include a sensitivity test to 2036 to include local plan developments.

Kind Regards,

**Chris Hirst**  
Assistant Transport Planner  
01962 846877  
[Chris.Hirst@hants.gov.uk](mailto:Chris.Hirst@hants.gov.uk)

**Highways Development Planning**  
Hampshire County Council  
2<sup>nd</sup> Floor Elizabeth II Court West  
The Castle Winchester SO23 8UD



**Hampshire County Council operates a pre-application highway advice service for developers.**

Hampshire County Council welcomes and encourages discussions before a developer submits a planning application.

Please follow this link for further information

[Pre-Application guidance for developers](#)

\*\*\* This email, and any attachments, is strictly confidential and may be legally privileged. It is intended only for the addressee. If you are not the intended recipient, any disclosure, copying, distribution or other use of this communication is strictly prohibited. If you have received this message in error, please contact the sender. Any request for disclosure of this document under the Data Protection Act 1998 or Freedom of Information Act 2000 should be referred to the sender. [disclaimer id: HCCStdDisclaimerExt] \*\*\*

## **APPENDIX 8**

### **PV2 CALCULATIONS**

## APPENDIX 5

### REVIEW OF GUIDANCE FOR PEDESTRIAN CROSSINGS

#### PV<sup>2</sup> Assessment Criteria

1. The current guidance uses a numerical measure to assess the degree of conflict between vehicles and pedestrians, with a reduced numerical measure for special circumstances. The degree of conflict is determined by multiplying the number of vehicles per hour (V) squared by the number of pedestrians crossing per hour (P) over a 100m section. The average of the four highest hours is taken to represent what is called PV<sup>2</sup>. With the introduction of the current national guidance in Local Transport Note 1/95 in 1995, there was a move away, nationally, from the explicit use of PV<sup>2</sup> to a framework approach. However, there was still considered to be a need for some simple, easily understood measure to act as an initial starting point to see if a particular location justifies further investigation and justification for the provision of a controlled crossing. Since PV<sup>2</sup> is a well known and understood measure it is considered appropriate to use the principal of PV<sup>2</sup> but change the starting point to reflect more fully the current national policy guidance, the objectives of the Local Transport Plan and the practices in other local authorities.
2. When assessing a request for a crossing then, if the value of PV<sup>2</sup> is less than 0.2 x 108, no formal crossing facilities are required. If the value of PV<sup>2</sup> is above 0.2 x 108 then there should be a more in-depth framework assessment carried out, in line with the advice in Local Transport Note 1/95. This criterion is equally applicable to pedestrian facilities as combined pedestrian and cycle facilities.
3. However to maintain a consistent approach the framework assessment should also be based upon a PV<sup>2</sup> approach. This can be achieved through adjusting the value of PV<sup>2</sup> to take account of the composition of the pedestrian flow, the width to be crossed, the speed limit and 85<sup>th</sup>ile speed of the road and the difficulty encountered crossing the road in terms of time spent waiting and crossing.
4. However, there are circumstances that the proposed guidance may not fully address the issues of concern such as:
  - close to a proposed new developments ;
  - along a proposed Safer Routes to School route; and
  - along a proposed national cycle network routes.

5. At all the above situations there may be little existing pedestrian or cycle movements. However, as a result of the proposals significant volumes would result. Yet the application of the modified PV2 calculation would not imply the provision of a pedestrian facility because the number of new pedestrians and/or cyclists generated by the above three circumstances would not be known.
6. Therefore, in these circumstances, due consideration should be given to the provision of pedestrian/cycle crossing facilities if the traffic flow for the four busiest hours is above 480 vehicles per hour (two way) or the number of heavy goods vehicles is 300 vehicles per hour (two way) or above. After carrying out a preliminary survey of the proposed site a decision should be reached on whether a crossing is justified or not based upon experience at previously installed sites, judgement and knowledge of local factors.
7. In addition, where an existing location has a high pedestrian accident rate then, if pedestrian facilities are judged to be most effective remedy, these sites would not be subject to PV2 criteria.
8. In adopting this approach the proposal not only gives an indication of the need for a crossing but also allows for the inclusion of costs to incorporate a ranking between different types of crossing and between two different sites if funding is not immediately available to undertake all requests for crossing facilities in a given year.

Further Details of the Suggested Method

9. In order to take account of the various different classifications of pedestrians it is suggested that a series of factors should be applied to the value of PV2, which is still calculated as the average over the highest four hours. as follows:

**EP** Percentage of Elderly pedestrians (EP). If the percentage of elderly pedestrians is less than 10%, a factor of 1 should be used. If more than 10%, then use the following formula:

$$\frac{(100+E)}{P} \\ 110$$

(Elderly defined in terms of visual appearance and is a judgement of the enumeration staff generally taken as over 60)

**UC** Percentage of unaccompanied children. If there are not more than 10% of unaccompanied children, use 1. If there are more than 10%, use the following formula:

$$\frac{(10)}{0+U} \\ C)$$

**PW** Percentage of pedestrians with prams/pushchairs, wheelchairs or blind (white sticks or guide dogs). If not more than 5% use 1. If more than 5% then use the following formula:

$$\frac{(100 + P)}{W} \\ 105$$

**PB** Percentage of bicycles crossing. If not more than 15%, use 1. If more than 15%, use following formula:

$$\frac{(100 + PB)}{115}$$

**RW** Road width. If not more than 7.3m, use 1. If more than 7.3m, use the following formula:

$$\frac{W}{7.3}$$

**CT** Time to cross (seconds) this reflects the difficulty in crossing in terms of the volume of traffic and complexity of the location (eg presence of junctions or other features). If it takes on average less than 26 seconds cross, use 1. If it takes between 26 and 40 seconds to cross, use 1.2; if it takes between 41 and 60 seconds to cross use 1.4; and If it takes over 60 seconds to cross, use 1.6 (the above crossing times include both waiting time and crossing time).

**VS** Vehicle speeds; if 85th percentile speed is less than 30 use a factor of 1

If between 30 and 35 use 1.1

If between 36 and 40 use 1.2

If between 41 and 45 use 1.3

If between 46 and 50 use 1.4

**NB** before considering the use of surface crossings on roads with 85th percentile speeds greater than 50 mph consider speed reduction measures.

**CS** If proposal is located where a road divides a substantial community or is outside a school, clinic, community centre, home for the elderly or busy shopping centre adjust as follows:

Proposed location is on a road that causes community severance or outside a school or clinic, home for the elderly etc then apply 1.1.

If the proposed site is close to two of the above use a factor of 1.25.

If a proposed site is close to three or more of use a factor of 1.4.

### **Modified Formula for PV<sup>2</sup>**

$$\text{PV}^2 \text{ Adjustment factor } \quad (\text{EP} \times \text{UC} \times \text{PW} \times \text{PB} \times \text{RW} \times \text{CT} \times \text{VS} \times \text{CS})$$

If adjusted PV<sup>2</sup> is greater than 0.6 x 10<sup>8</sup> consider either a zebra crossing or a pelican crossing

Below 0.6 consideration of other measures should be given such as narrowing carriageway to aid crossing, central refuges, traffic calming.

### Priority Number

10.A priority number can be obtained if the adjusted PV<sup>2</sup> value for a location is multiplied by a standard cost for the particular crossing facility divided by cost of providing a particular crossing facility for a site eg:

$$\text{PV}^2 \times \text{adjustment factor} \times \frac{\text{standard cost of crossing}}{\text{Estimated cost}}$$

<b>Type of Crossing</b>	<b>Standard Cost (excluding resurfacing)</b>
Narrowing of carriageway (road markings)	£1,000
Carriageway narrowing	£7,000
Table with associated measures	£6,000
Pedestrian Refuge	£6,000
Zebra crossing	£6,000
Pelican or Puffin	£30,000
Toucan crossing	£30,000



## **Crossing Options**

Where  $PV^2$  is less than  $0.6 \times 10^8$

### Pedestrian Refuges and Road Narrowing

11. Perhaps the simplest form of pedestrian crossing is the pedestrian refuge. This allows both pedestrians and cyclists to cross the road in two halves, reducing the size of gap between vehicles they may require. Although such facilities aid the pedestrian or cyclist crossing the road, they can cause potential problems for cyclist travelling along the road because of the reduced width available for motorised traffic to pass. Refuges are most appropriate where the road is around 10 metres wide.
12. An alternative to the refuge is to use build-outs or road narrowing to assist the pedestrian. Although this does not have the advantage of allowing the pedestrian or cyclist to cross the road in two halves it does reduce the distance the pedestrian would have to cross on the carriageway. It also would allow motorised vehicles the opportunity to pass cycles on the off side because there would not be a central restriction.

Where  $PV^2$  is greater than  $0.6 \times 10^8$

### Zebra Crossings

13. TD 4/79 Pelican Crossings: Pelican Crossing Operations, advised that zebra crossings should be considered where pedestrian flows are 1100 people per hour or less (averaged over the four highest hours) and where vehicle flows are 500 vehicles per hour or less (averaged over the four highest hours). These are still considered reasonable limits in the absence of any other advice or guidance. In addition, LTN1/95 advises that Zebra crossings are usually used where pedestrian flows are relatively low and traffic flows are no more than moderate. The likely effect of a Zebra crossing can be tested by checking the availability of gaps in the traffic. Gaps of around five seconds are needed for an able person to cross a 7 metre carriageway. The school crossing patrol assessment advises that there should be at least four gaps of around 7 seconds in every 5 minute period for there not to be a need for a crossing patrol. This can be considered a reasonable proxy to assess the availability of gaps against for a Zebra crossing.
14. Zebra crossings should not be installed on roads with an 85th percentile speed of 35 mph or above. Zebra crossings should not be considered where there are significant numbers of vulnerable road users such as: unaccompanied children, elderly and people with disabilities. If considering a zebra crossing, it should not be in isolation. It should be in conjunction with additional measures ranging from additional signing/lining to traffic calming.

15. Zebra crossings are also best avoided on busy town centre streets or outside railway stations since this is likely to result in a constant stream of pedestrians claiming priority. Other forms of crossing such as puffin crossings or pedestrianisation should be considered. In addition Zebra crossings should be avoided in unusual locations such as contra flow bus lanes.
  
16. The final type of crossing is the PUFFIN or TOUCAN which is a traffic signal controlled crossing for either pedestrians (PUFFIN) or both pedestrians and cyclists (TOUCAN).

## **APPENDIX 9**

### **2019 & 2024 TRAFFIC FLOW AND DISTRIBUTION DIAGRAMS**

**2019 Base "DS1"**

AM - 0800 - 0900




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

Traffic observed Wednesday 30/01/19

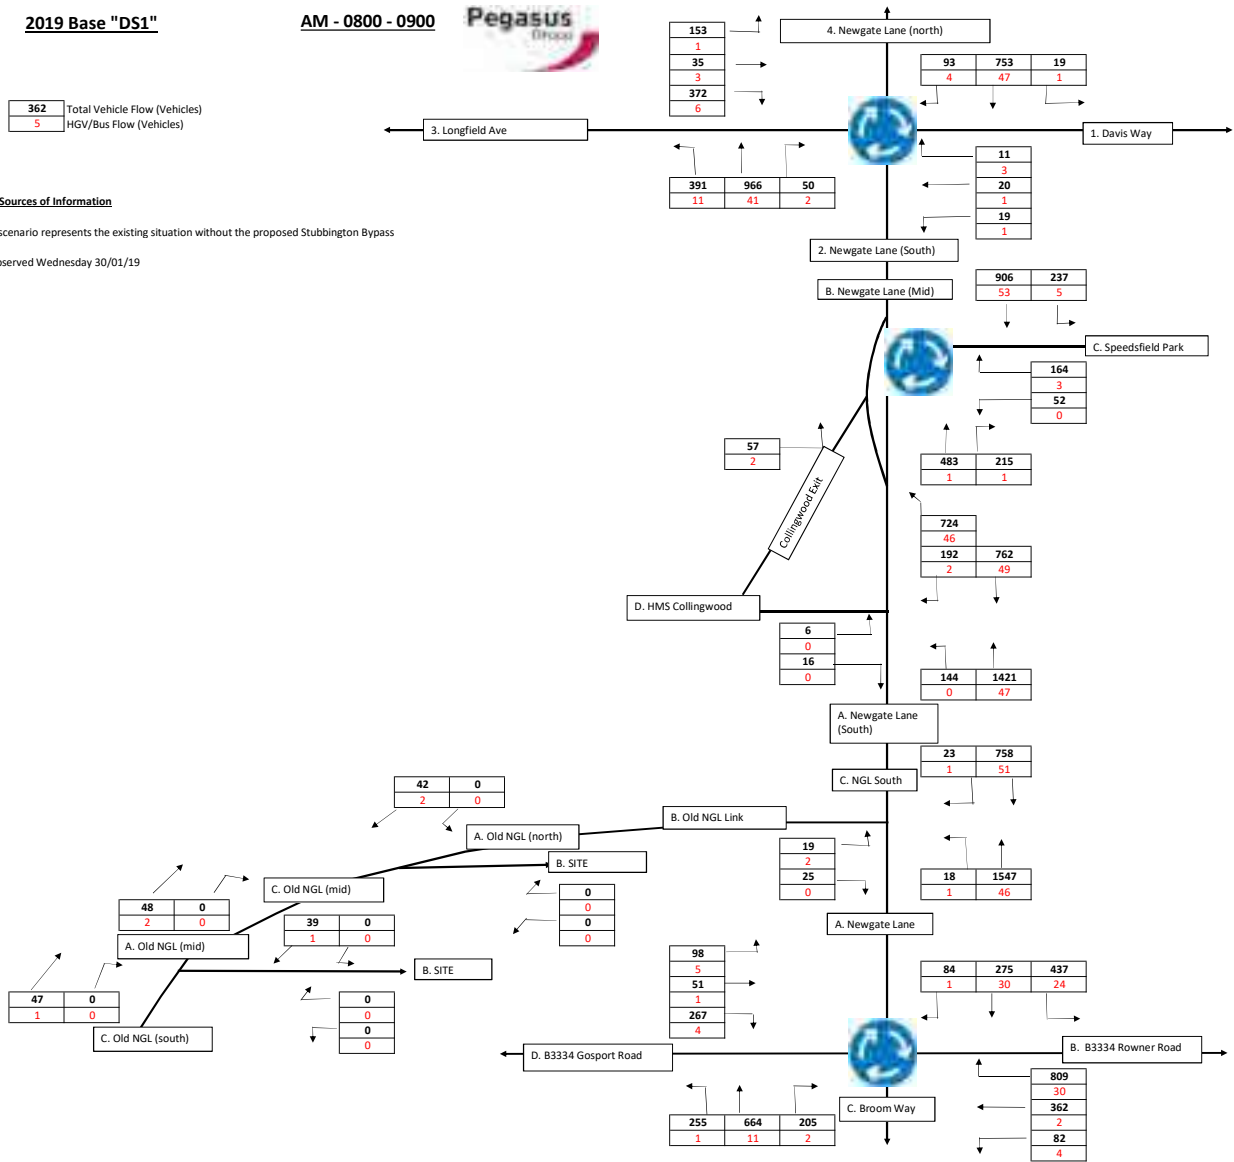

**2019 Base "DS1"**

PM - 1700 - 1800




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

Traffic observed Wednesday 30/01/19

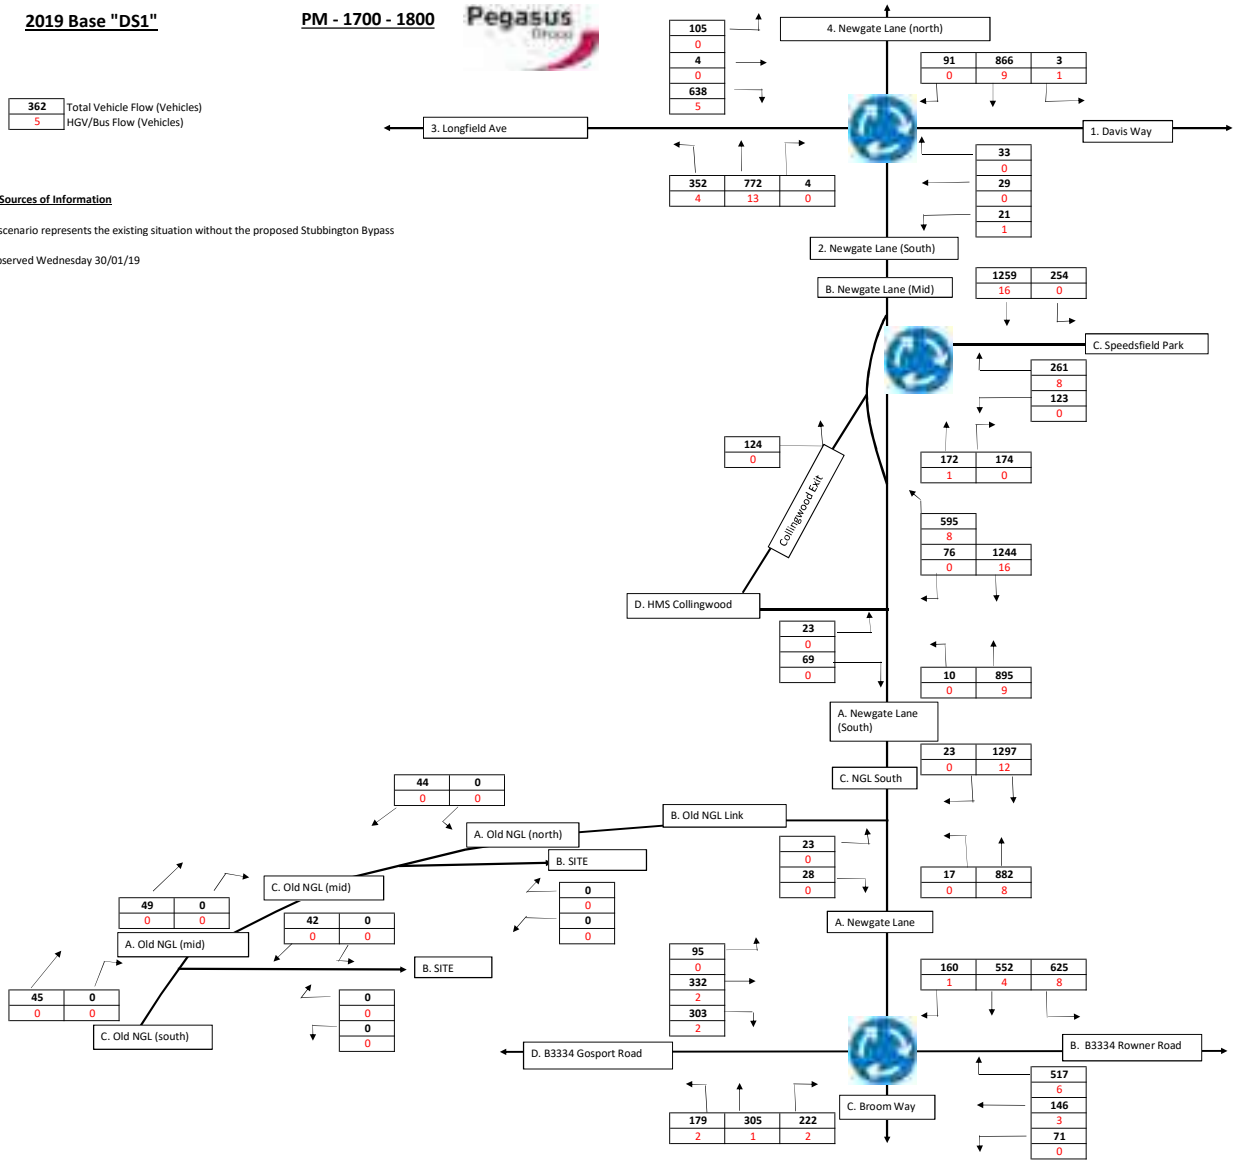

**"DS1" to "DS2" Conversion ratios**

AM - 0800 - 0900




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation therefore without the proposed Stubbington Bypass  
 No difference is expected on Old Newgate Lane.

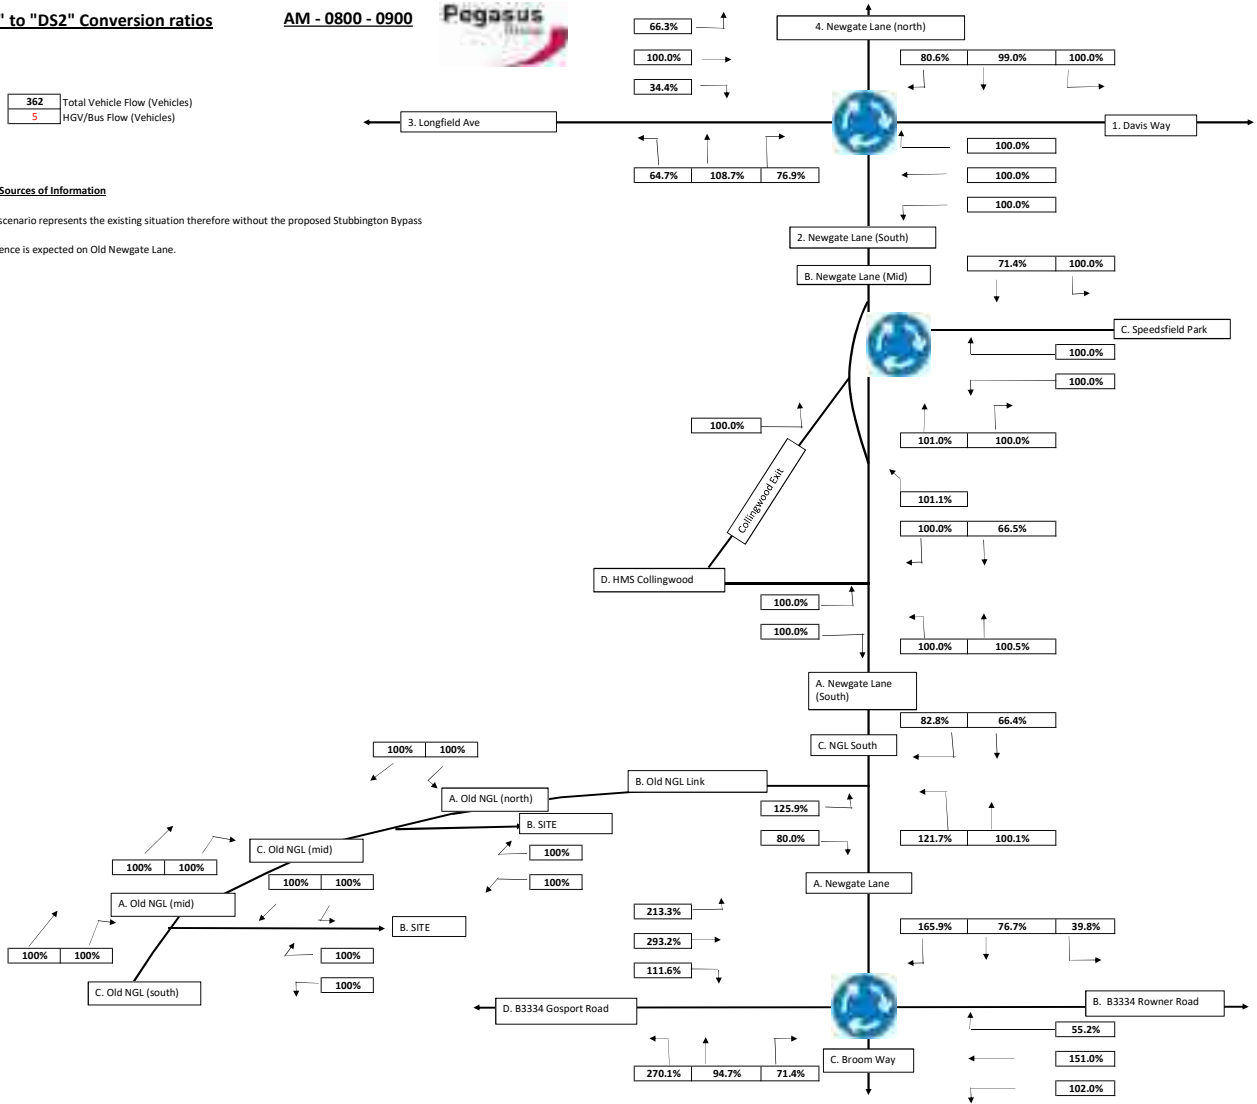

**"DS1" to "DS2" Conversion ratios**

**PM - 1700 - 1800**




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation therefore without the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

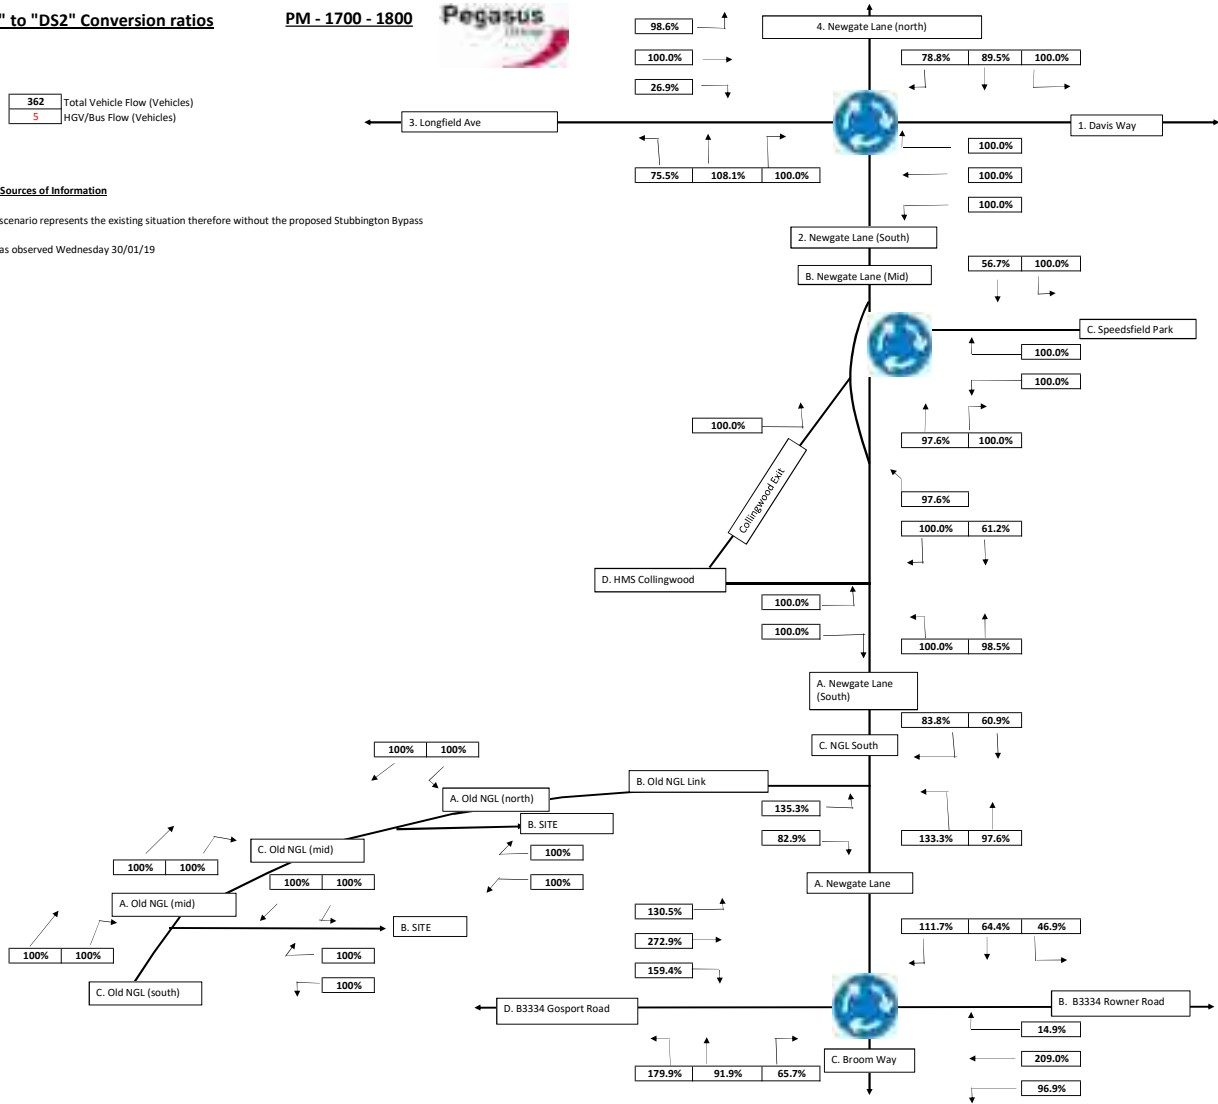

**2019 Base "DS2"**

AM - 0800 - 0900




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

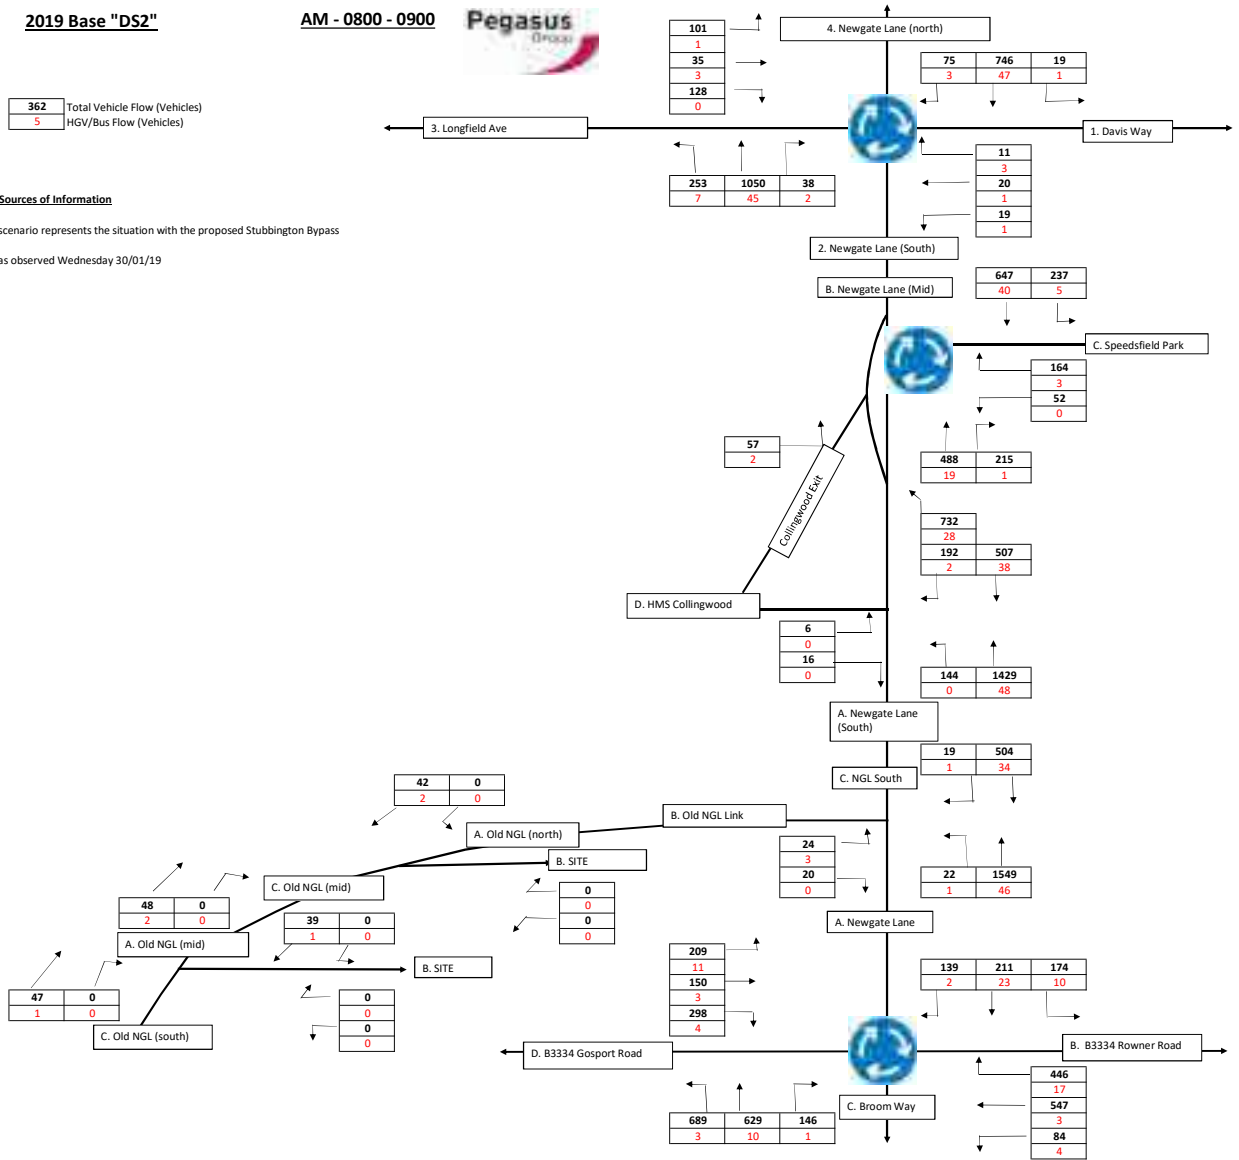



**2019 Base "DS2"**

**PM - 1700 - 1800**




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass  
 Traffic was observed Wednesday 30/01/19

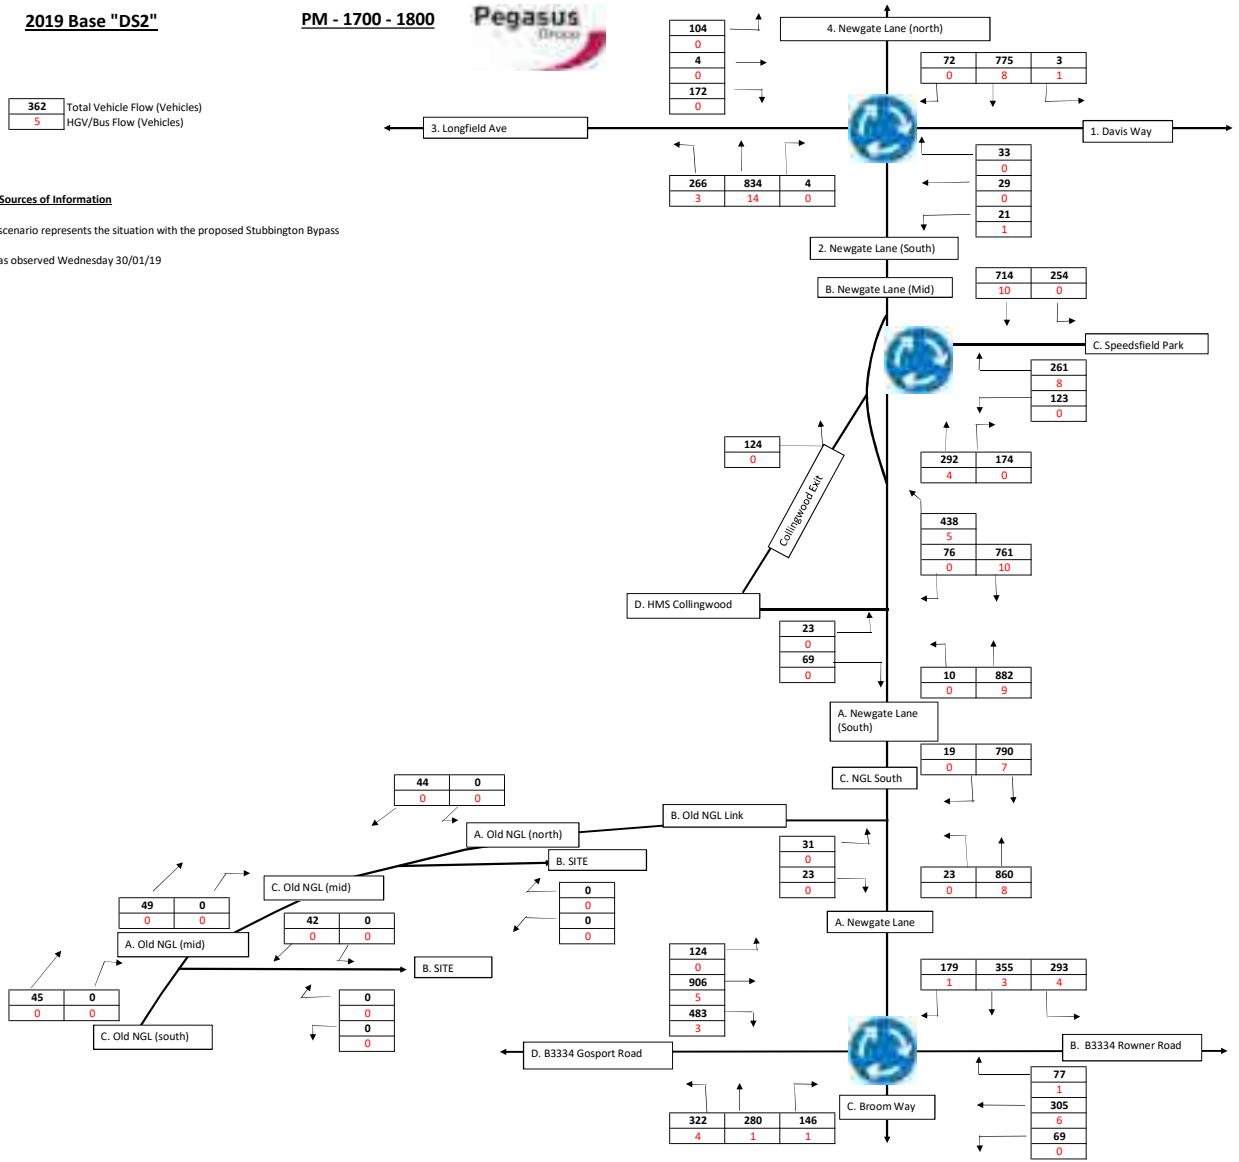

**2024 Base "DS1"**

AM - 0800 - 0900



Growth Rate: 1.0354


Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

Traffic observed Wednesday 30/01/19

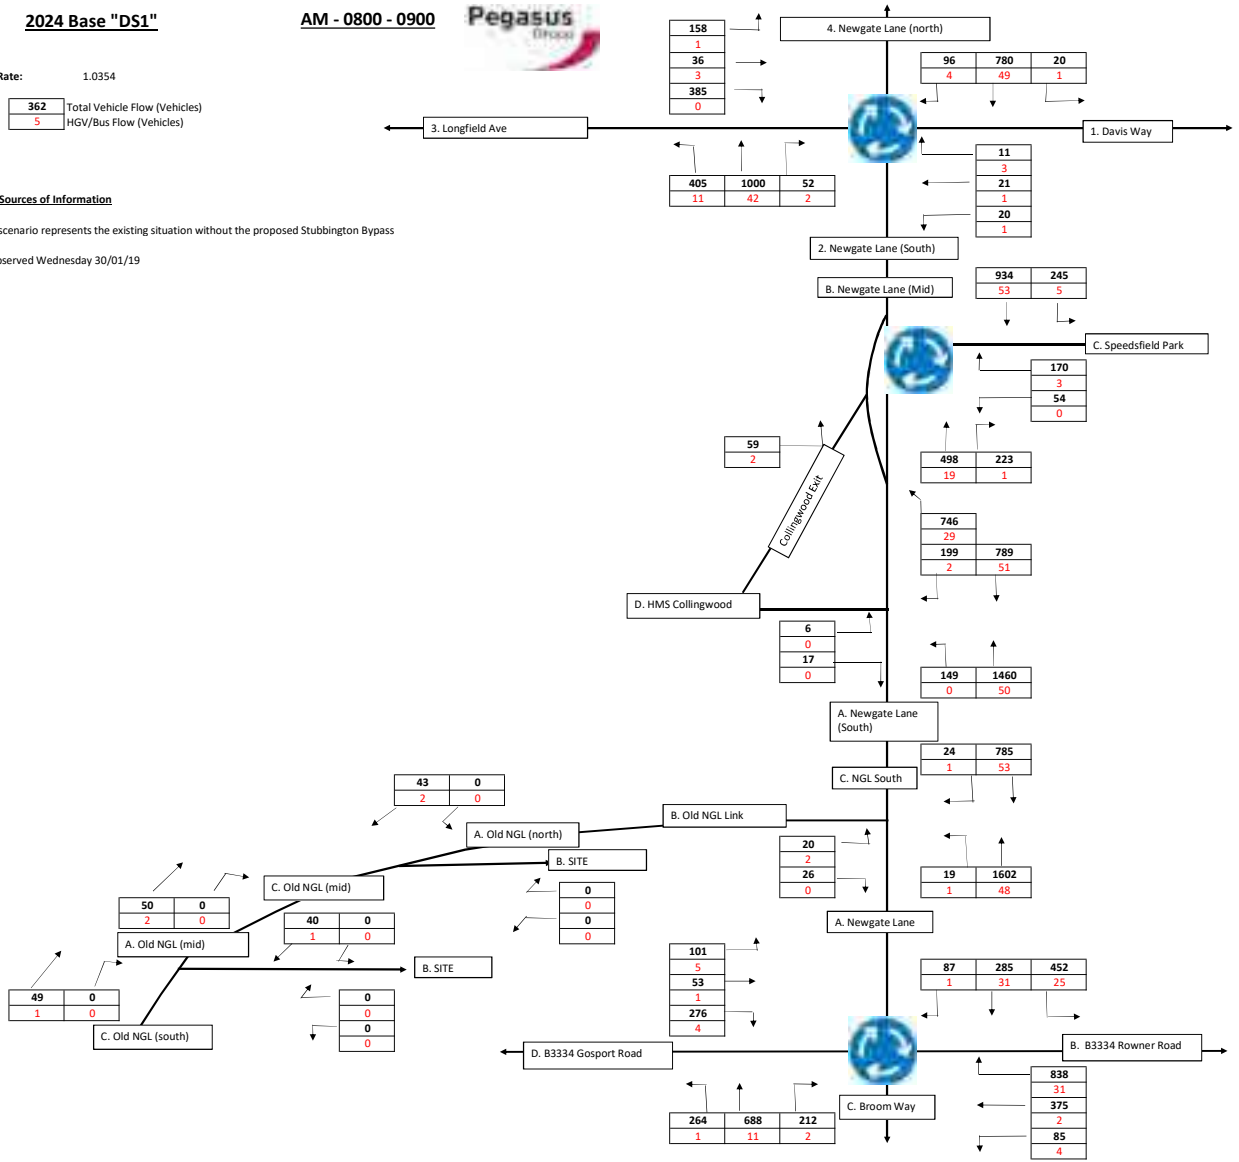

**2024 Base "DS1"**

PM - 1700 - 1800



Growth Rate: 1.0368


Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

Traffic observed Wednesday 30/01/19

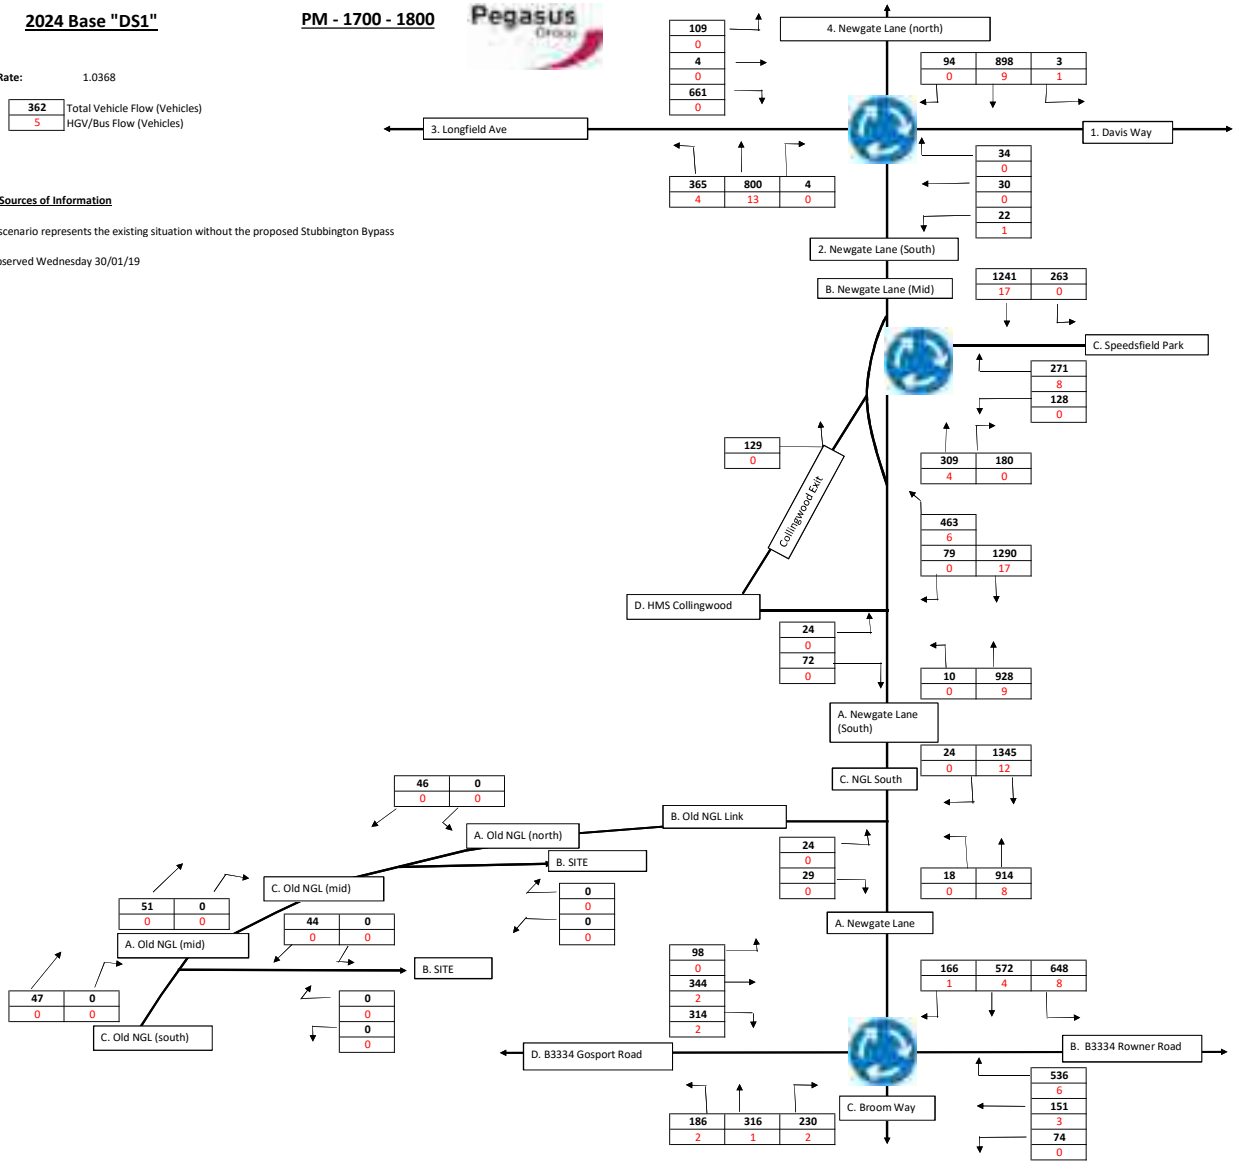

**2024 Base "DS2"**

**AM - 0800 - 0900**




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

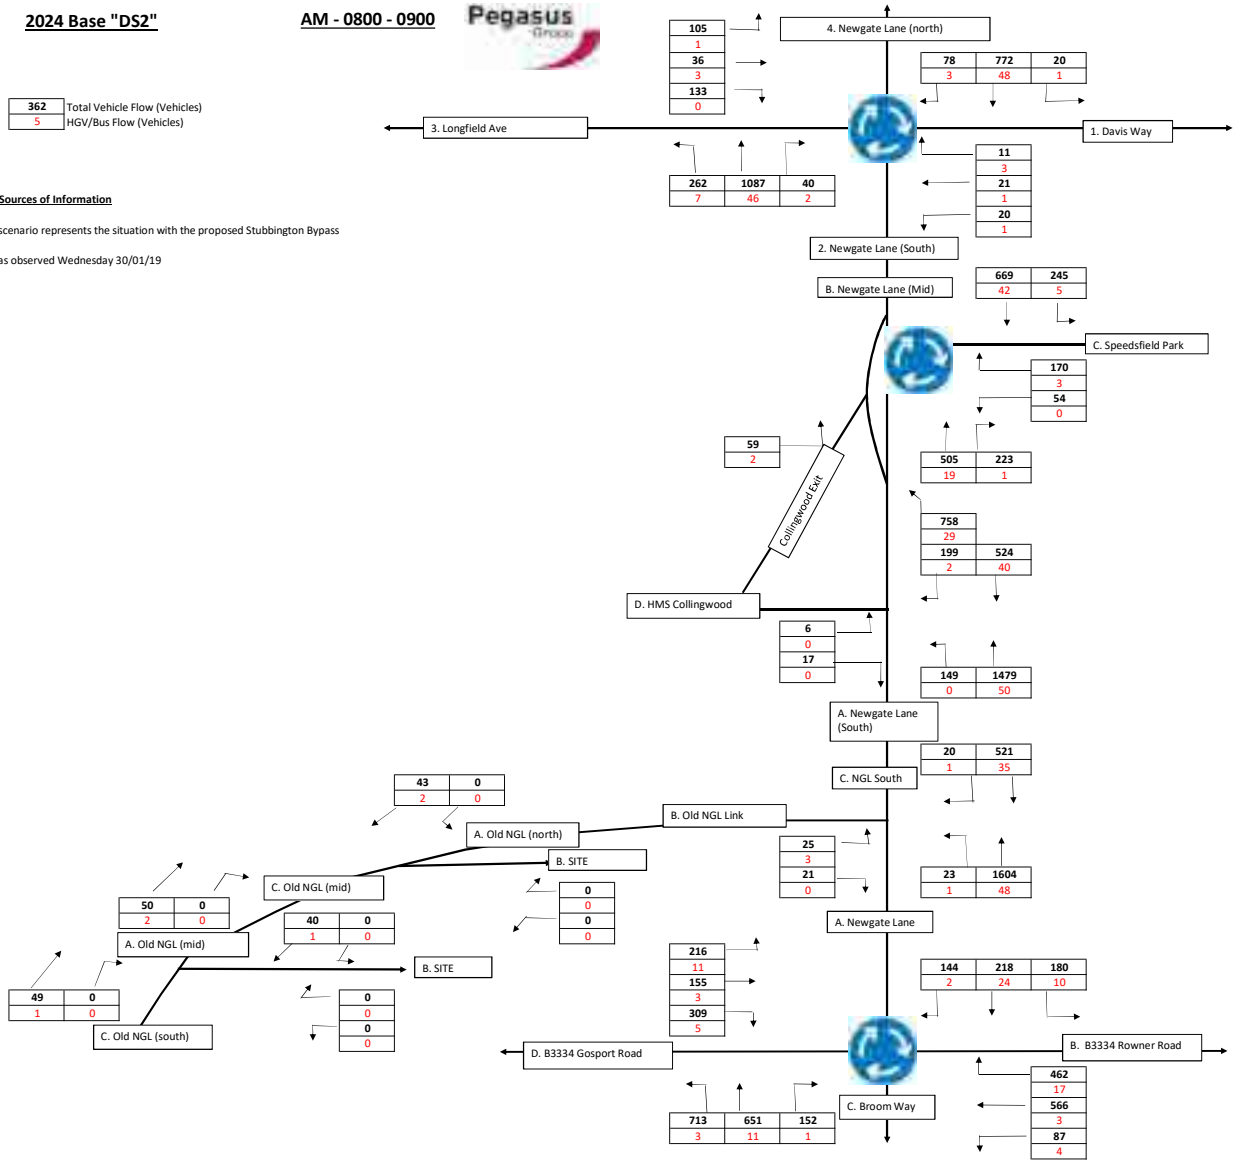

**2024 Base "DS2"**

PM - 1700 - 1800




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

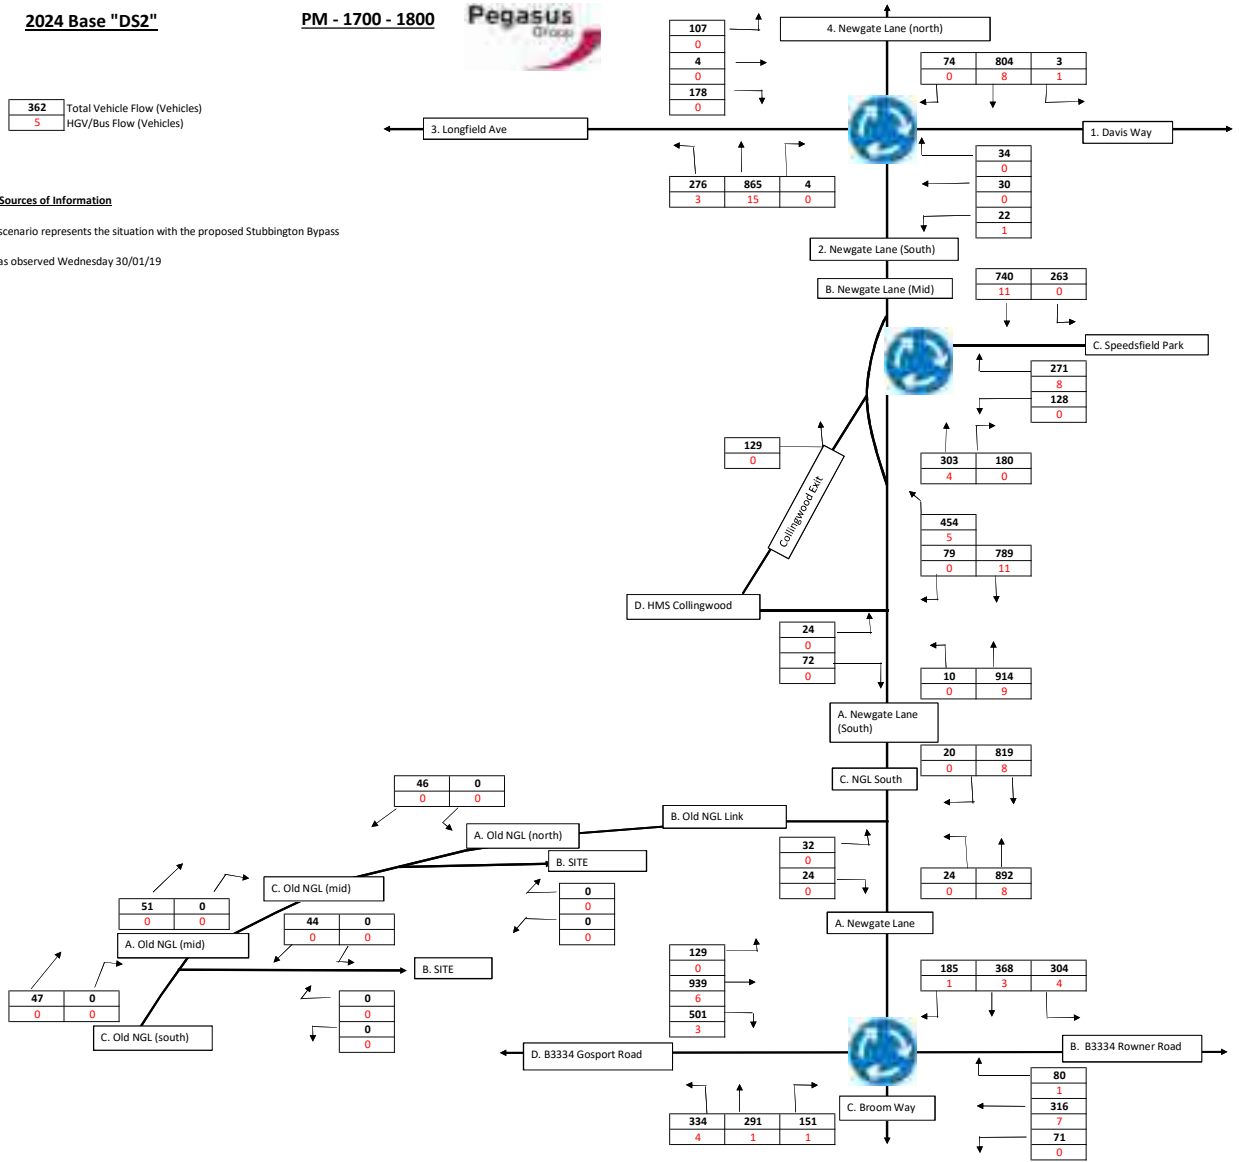

**"DS1" Development Trip Distribution**

AM - 0800 - 0900




Key: 19% % of development traffic

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass.

Distribution based from the observed turning percentages from Old NGL/NGL junction then via a pro-rata basis throughout the remainder of the network.

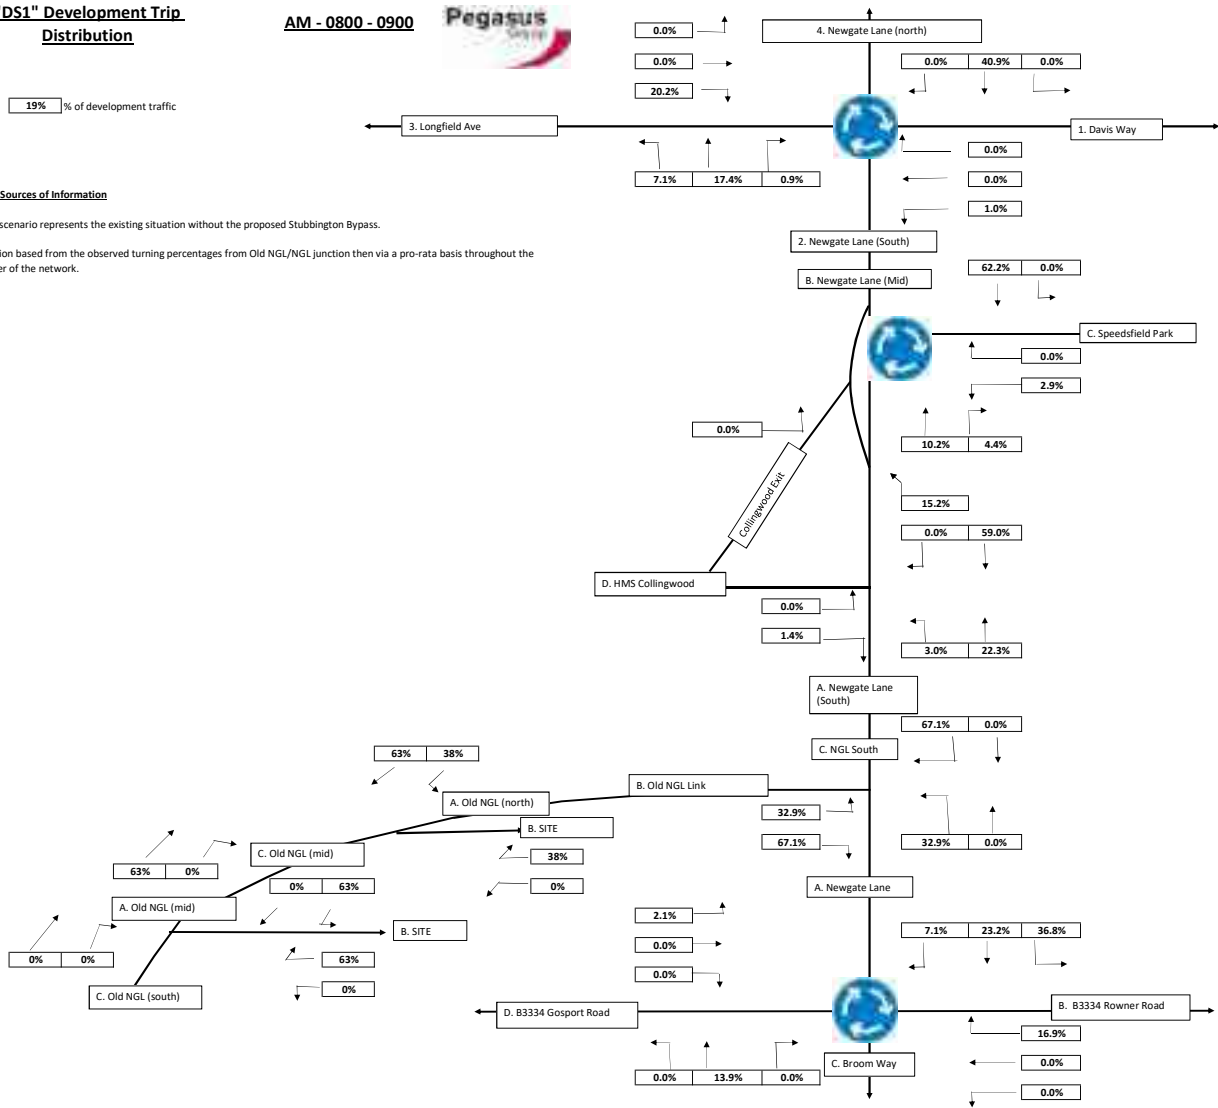

**"DS1" Development Trip Distribution**

PM - 1700 - 1800




Key:

19% % of development traffic

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass.

Distribution based from the observed turning percentages from Old NGL/NGL junction then via a pro-rata basis throughout the remainder of the network.

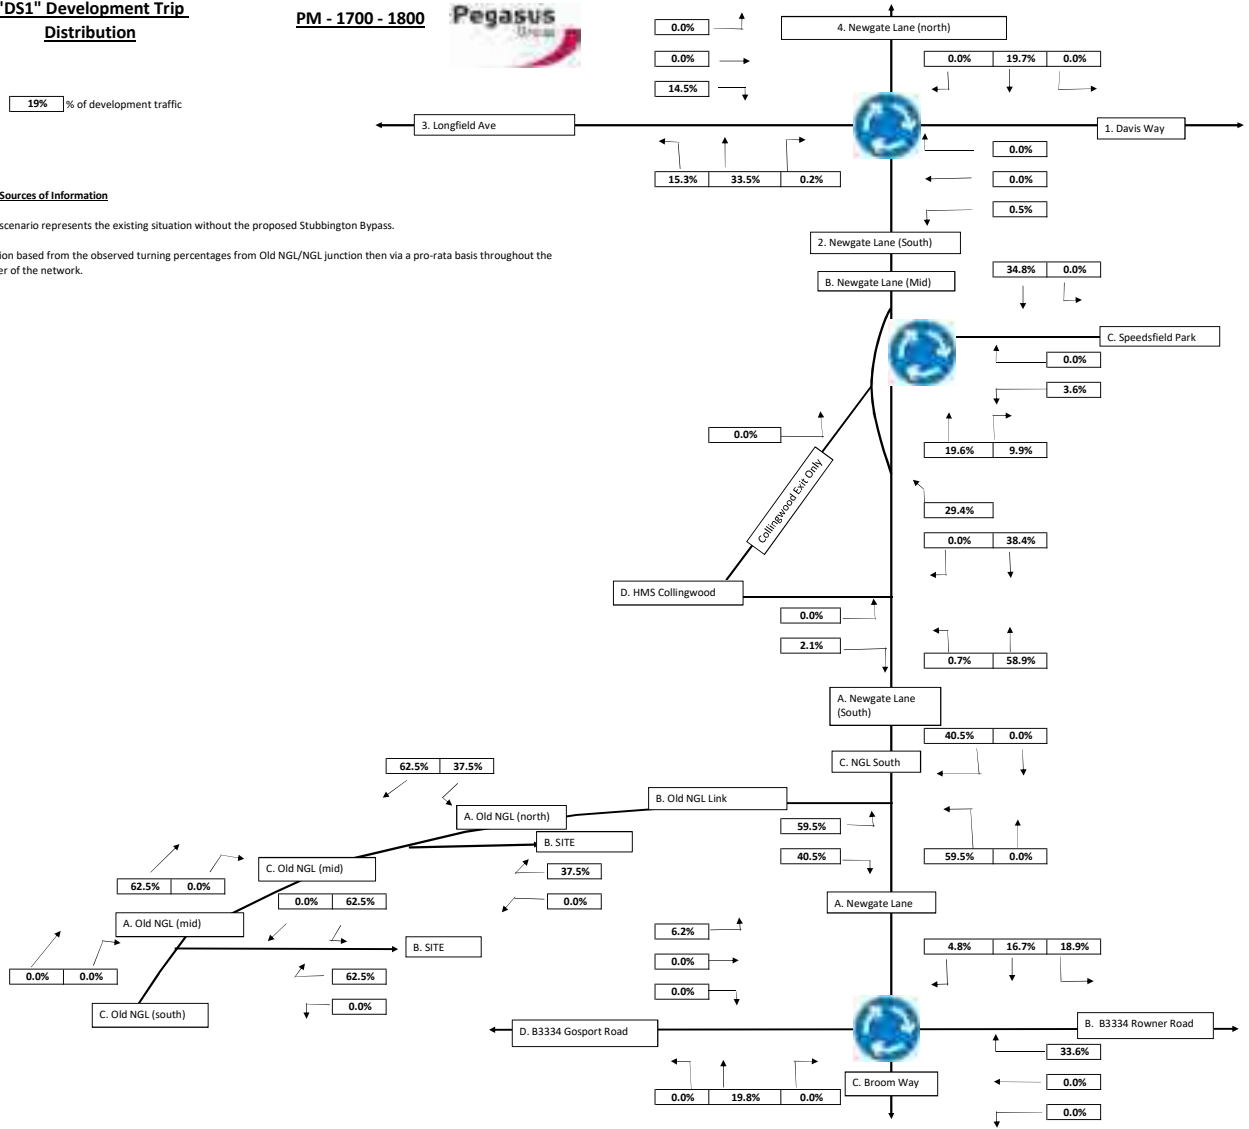

**"DS1" Development Trips**

AM - 0800 - 0900




Key:

10 Development Vehicle Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

TRICS Trip rate data used to assess the arrivals and departures from site applied to the development distribution.

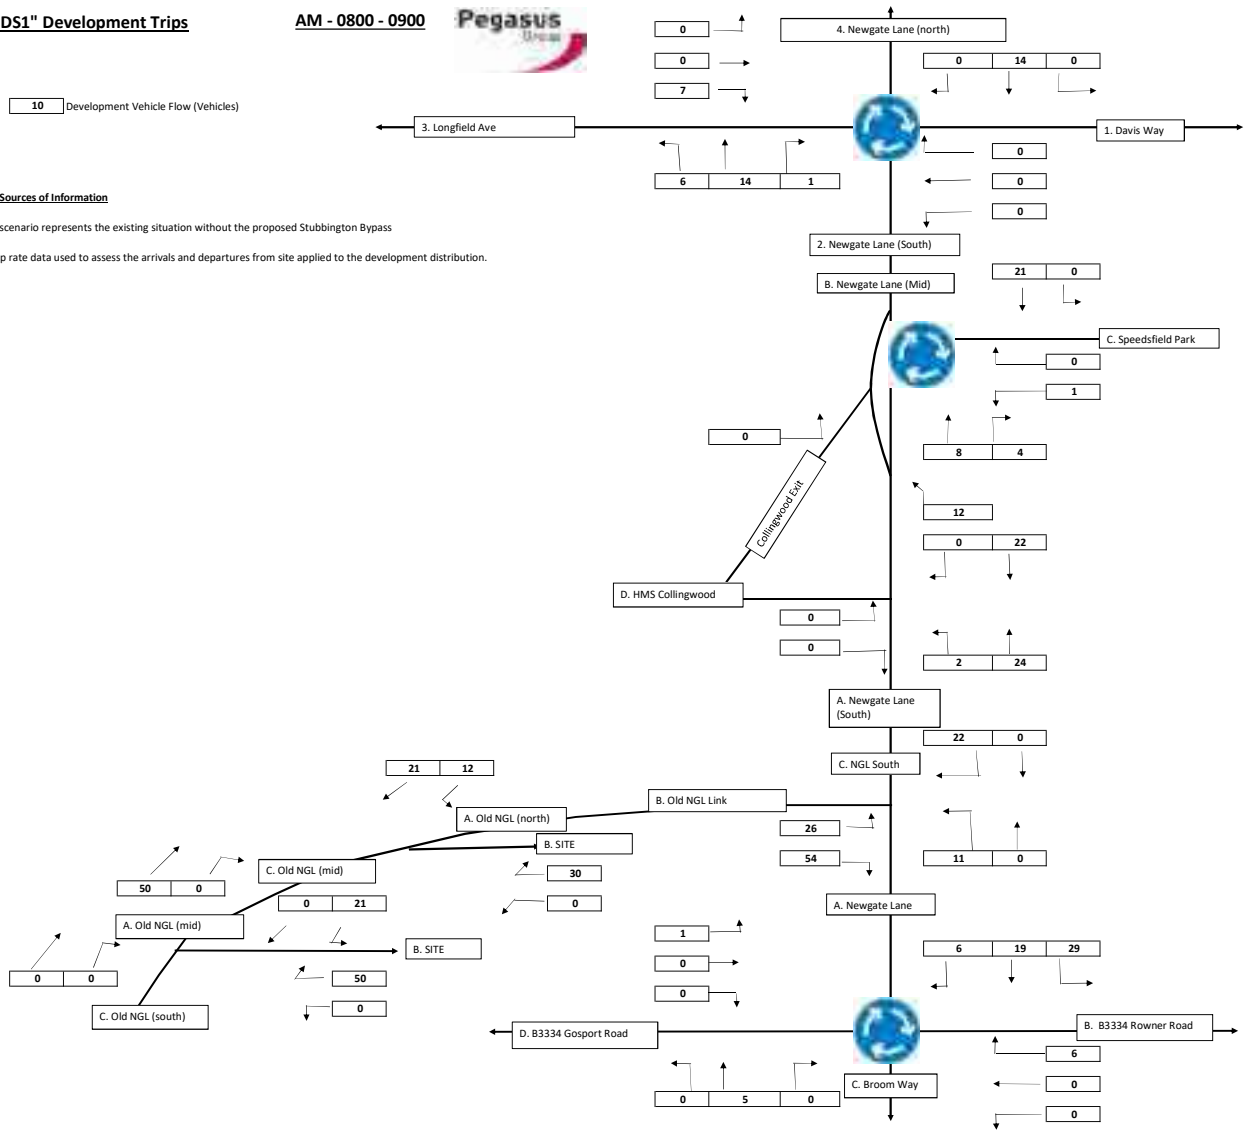



**"DS1" Development Trips**

**PM - 1700 - 1800**




Key:

10 Development Vehicle Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

TRICS Trip rate data used to assess the arrivals and departures from site applied to the development distribution.

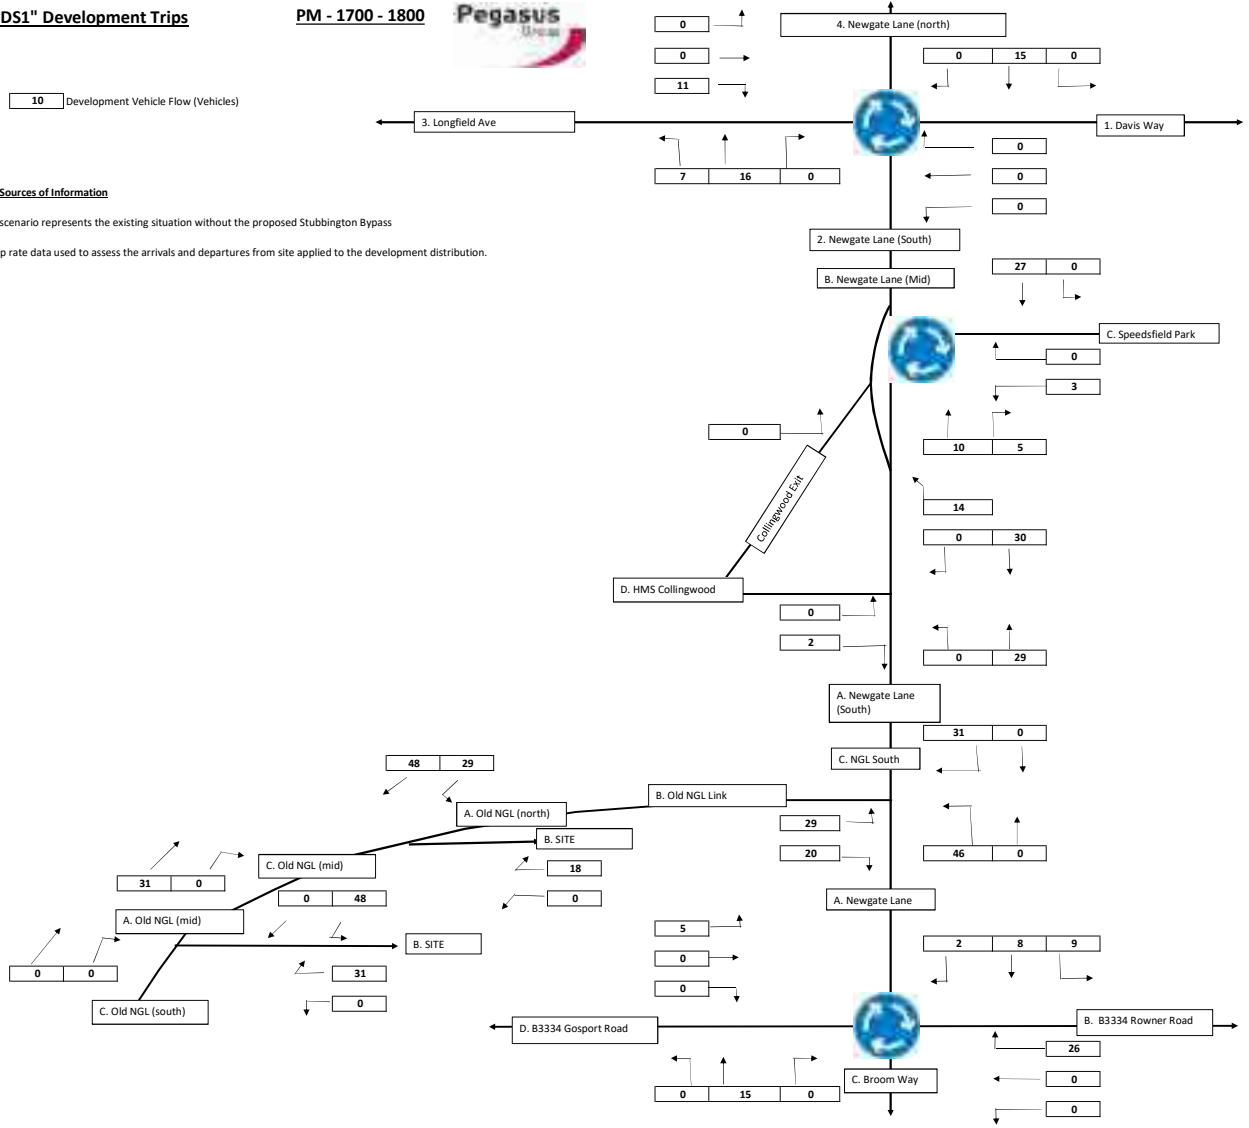

**2019 Development Trip  
Distribution "DS2"**

AM - 0800 - 0900




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

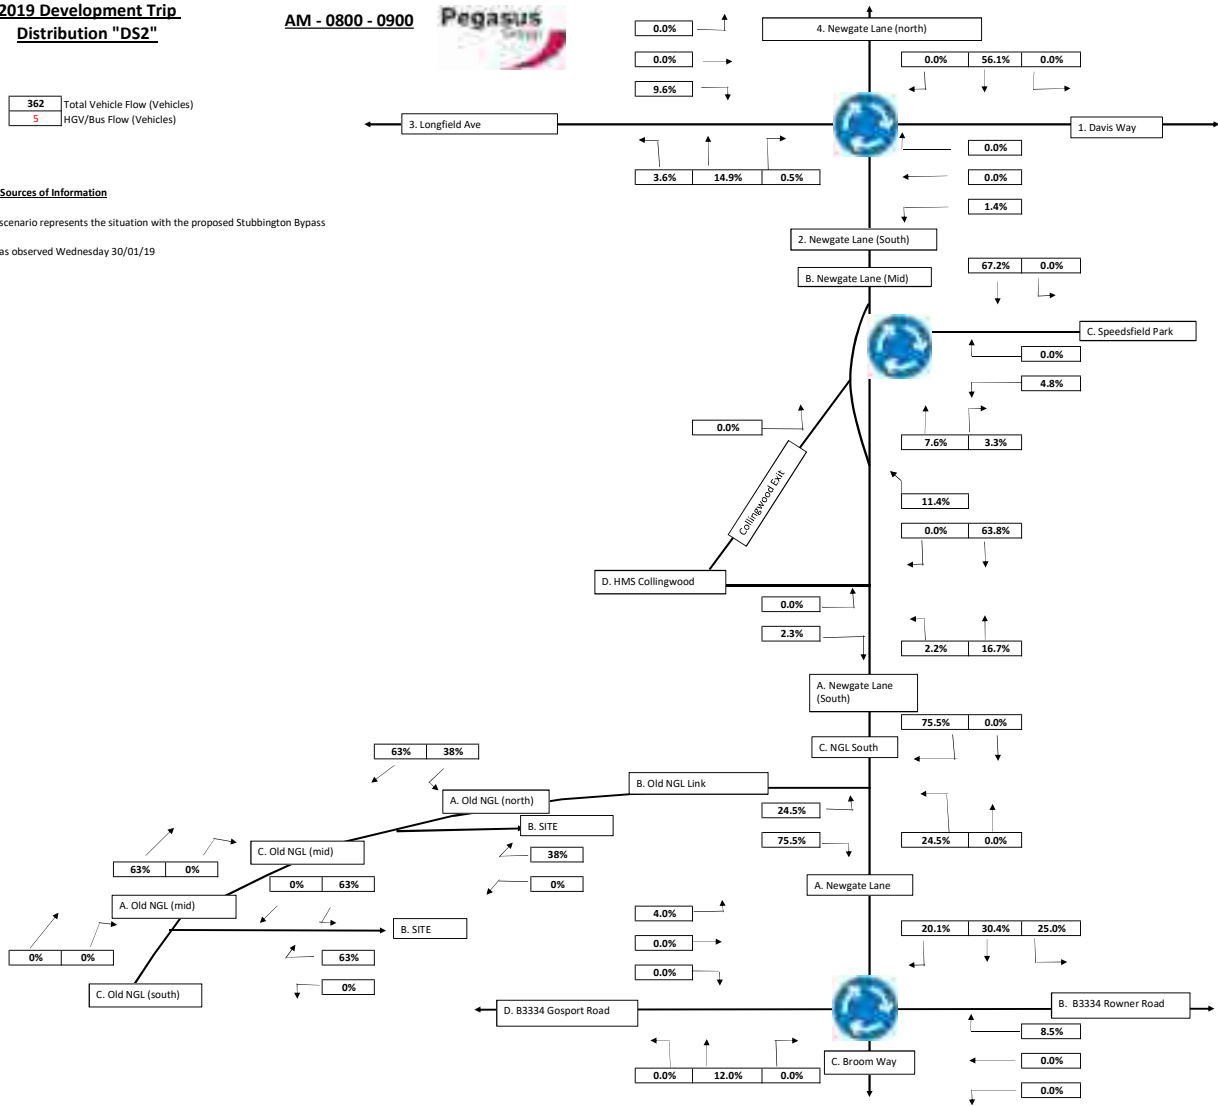

**2019 Development Trip  
Distribution "DS2"**

PM - 1700 - 1800




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

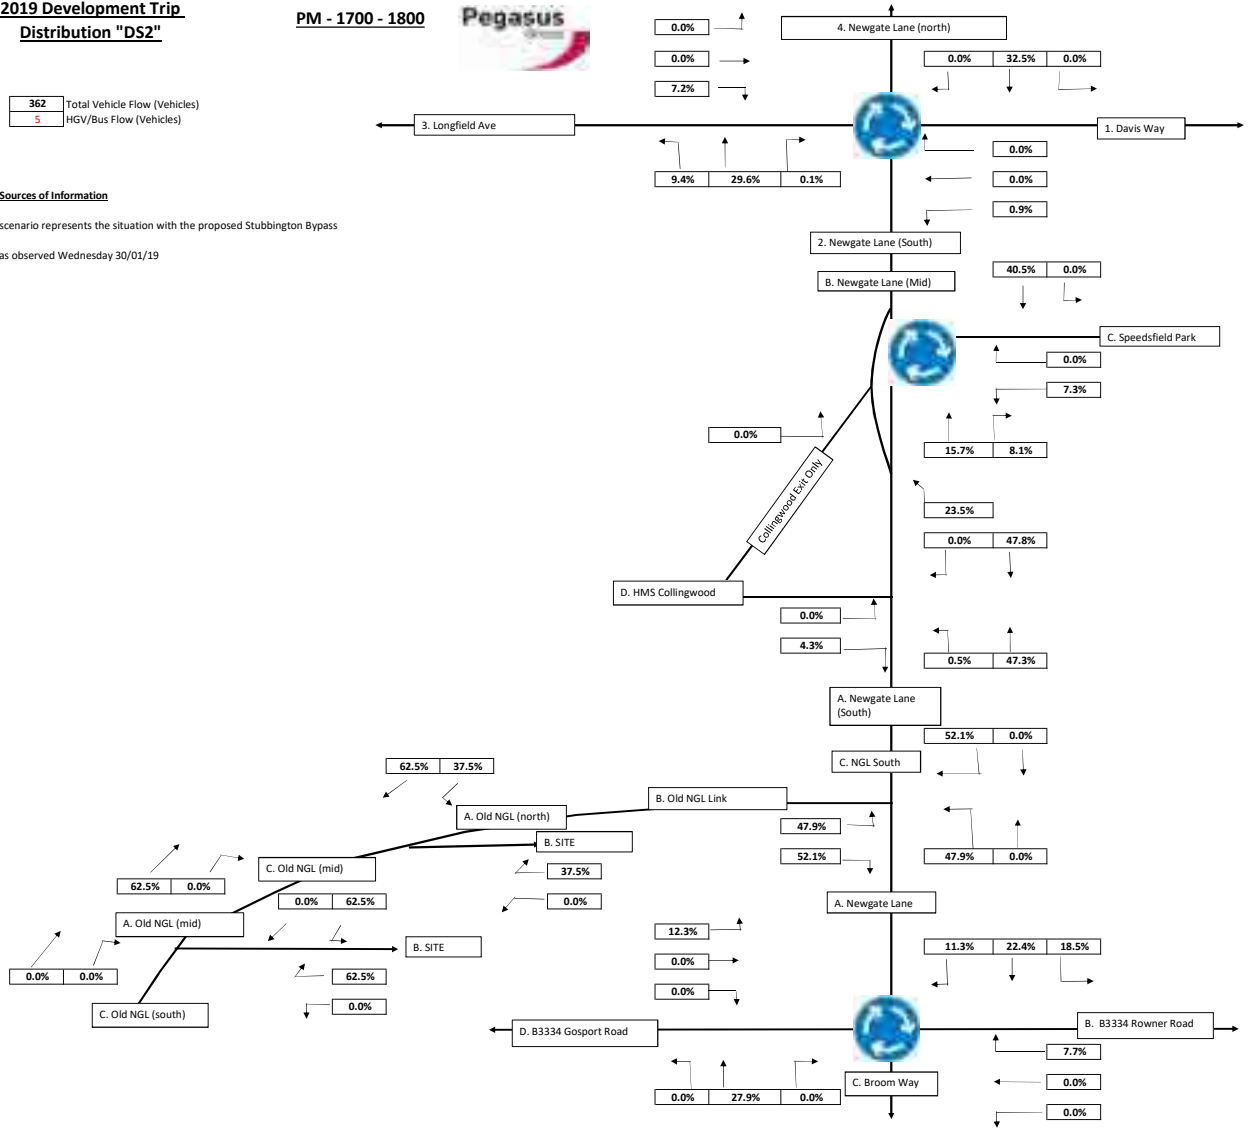

**2019 Development Trips "DS2"**

AM - 0800 - 0900




Key:

10 Development Vehicle Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

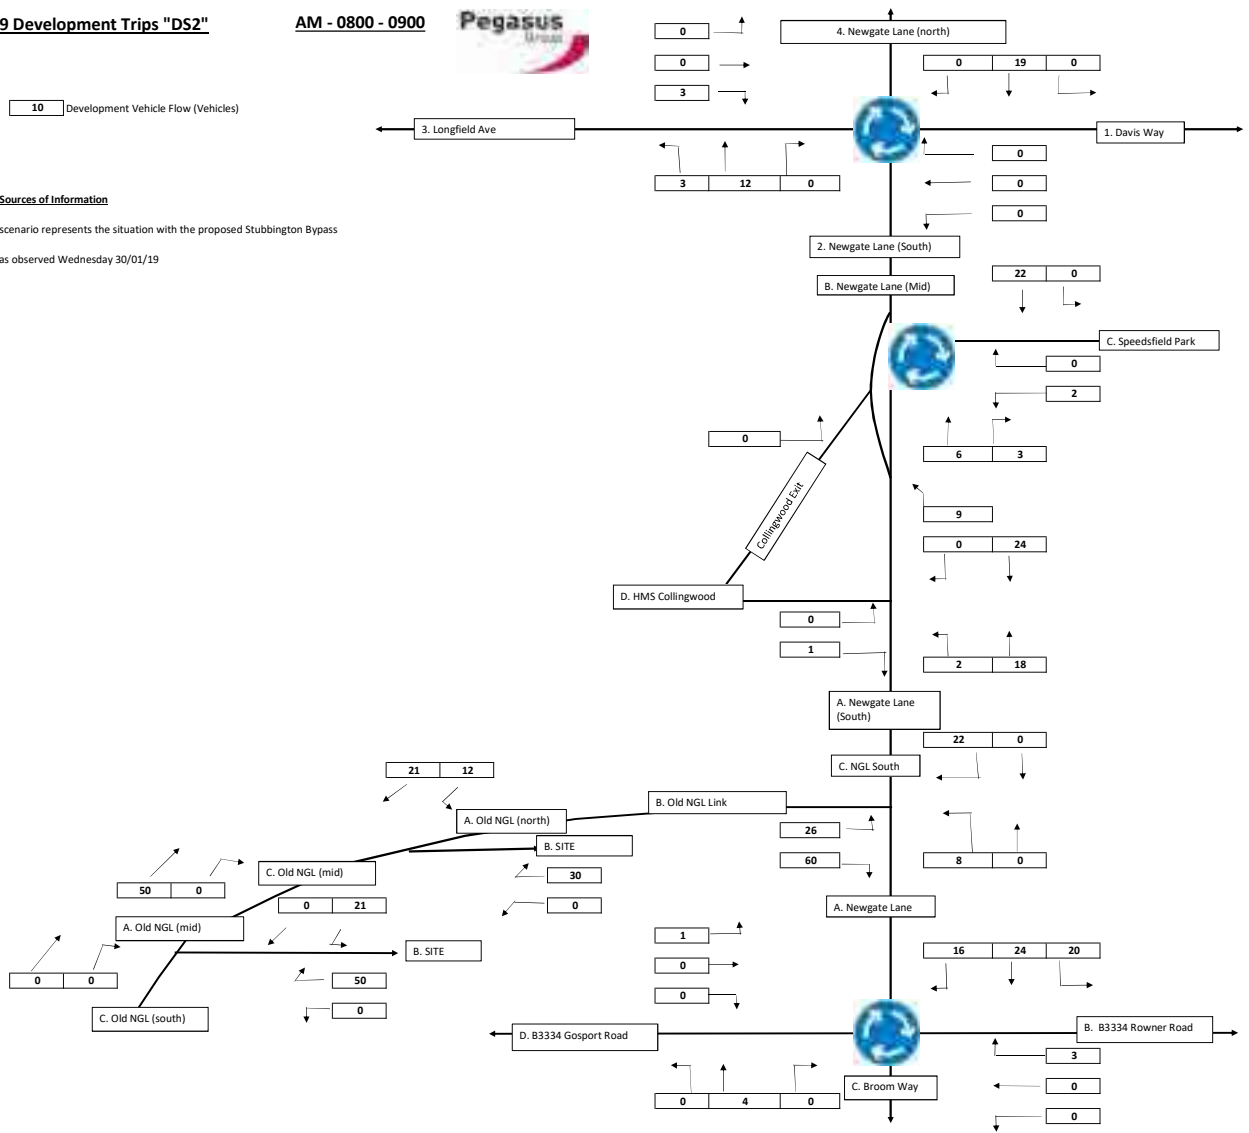

**2019 Development Trips "DS2"**

**PM - 1700 - 1800**




Key:

10 Development Vehicle Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

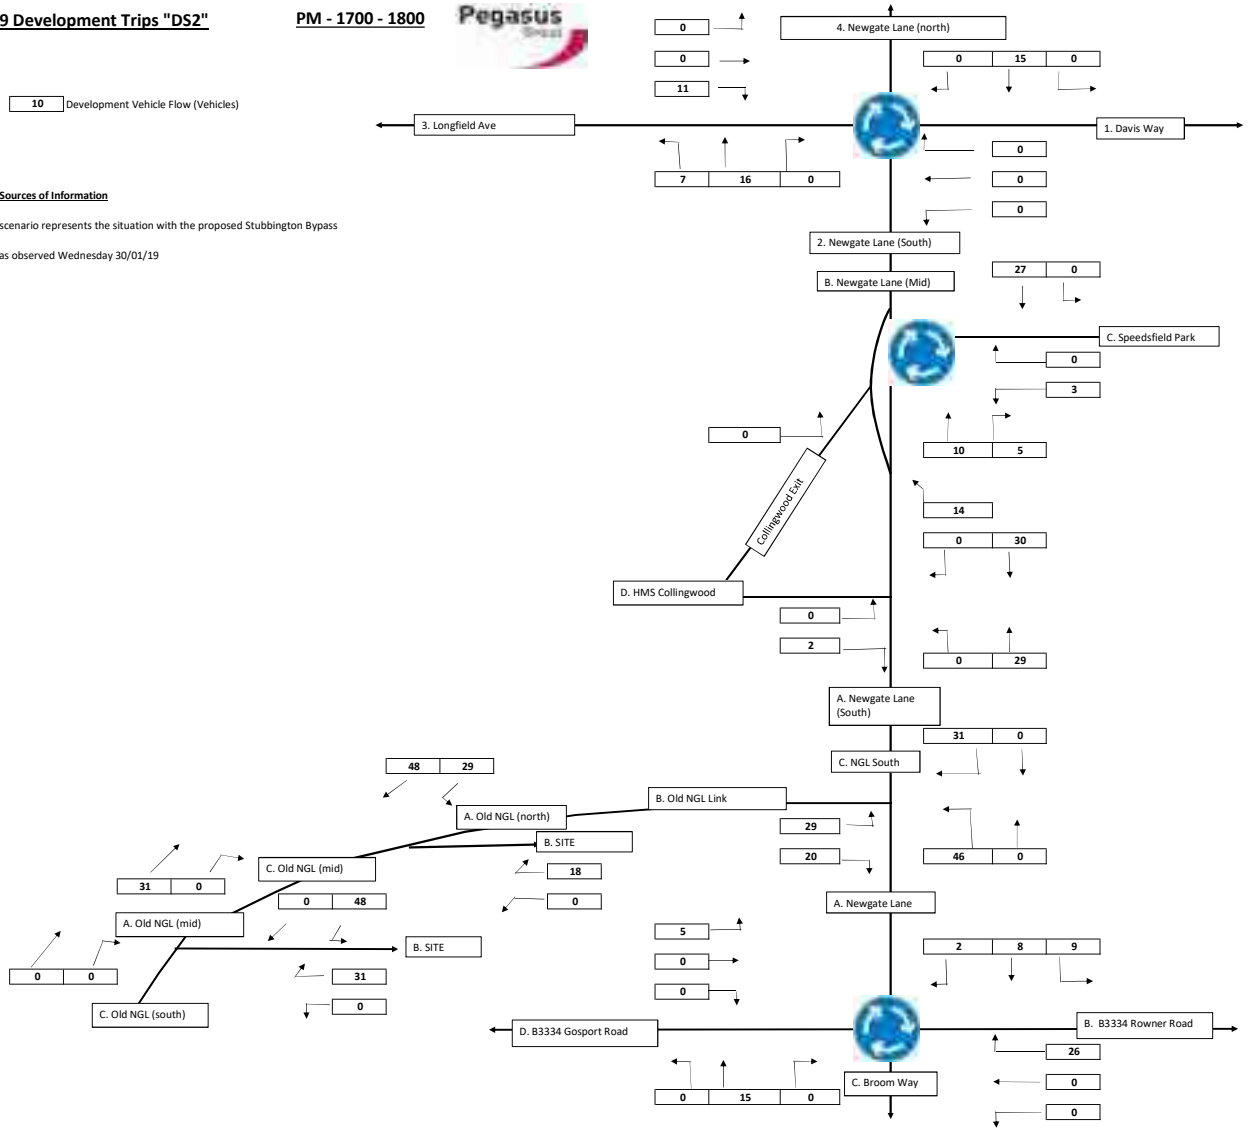

**2024 Base + Development "DS1"**

AM - 0800 - 0900



Growth Rate: 1.0354


Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

Traffic observed Wednesday 30/01/19 grown to 2024 then Development traffic added.

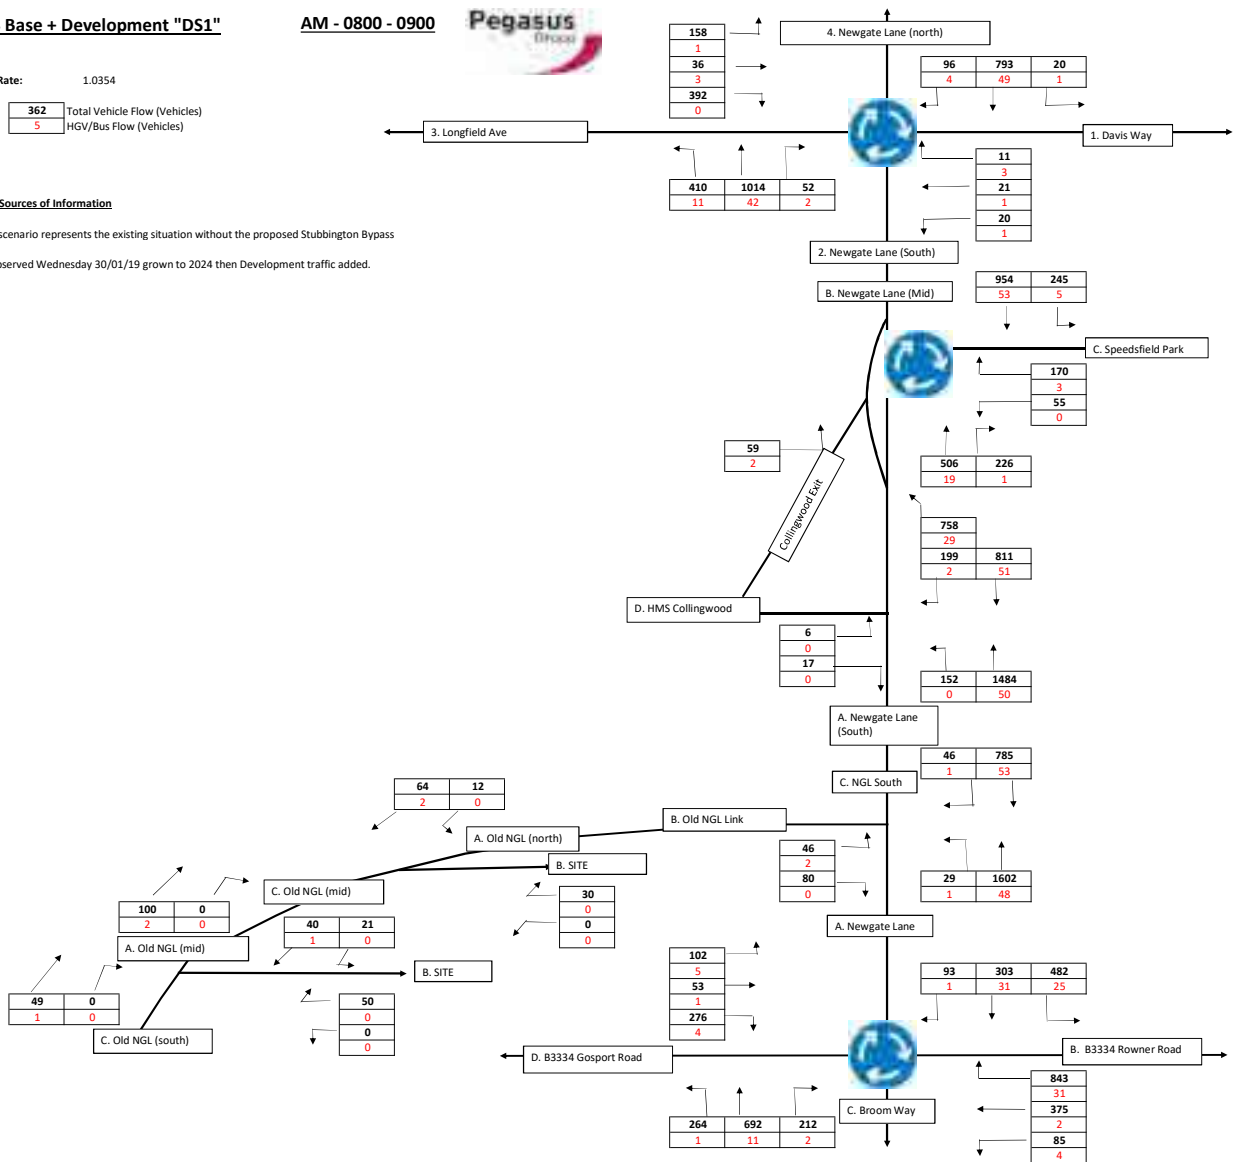

**2024 Base + Development "DS1"**

PM - 1700 - 1800



Growth Rate: 1.0368


Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

Traffic observed Wednesday 30/01/19 grown to 2024 then Development traffic added.

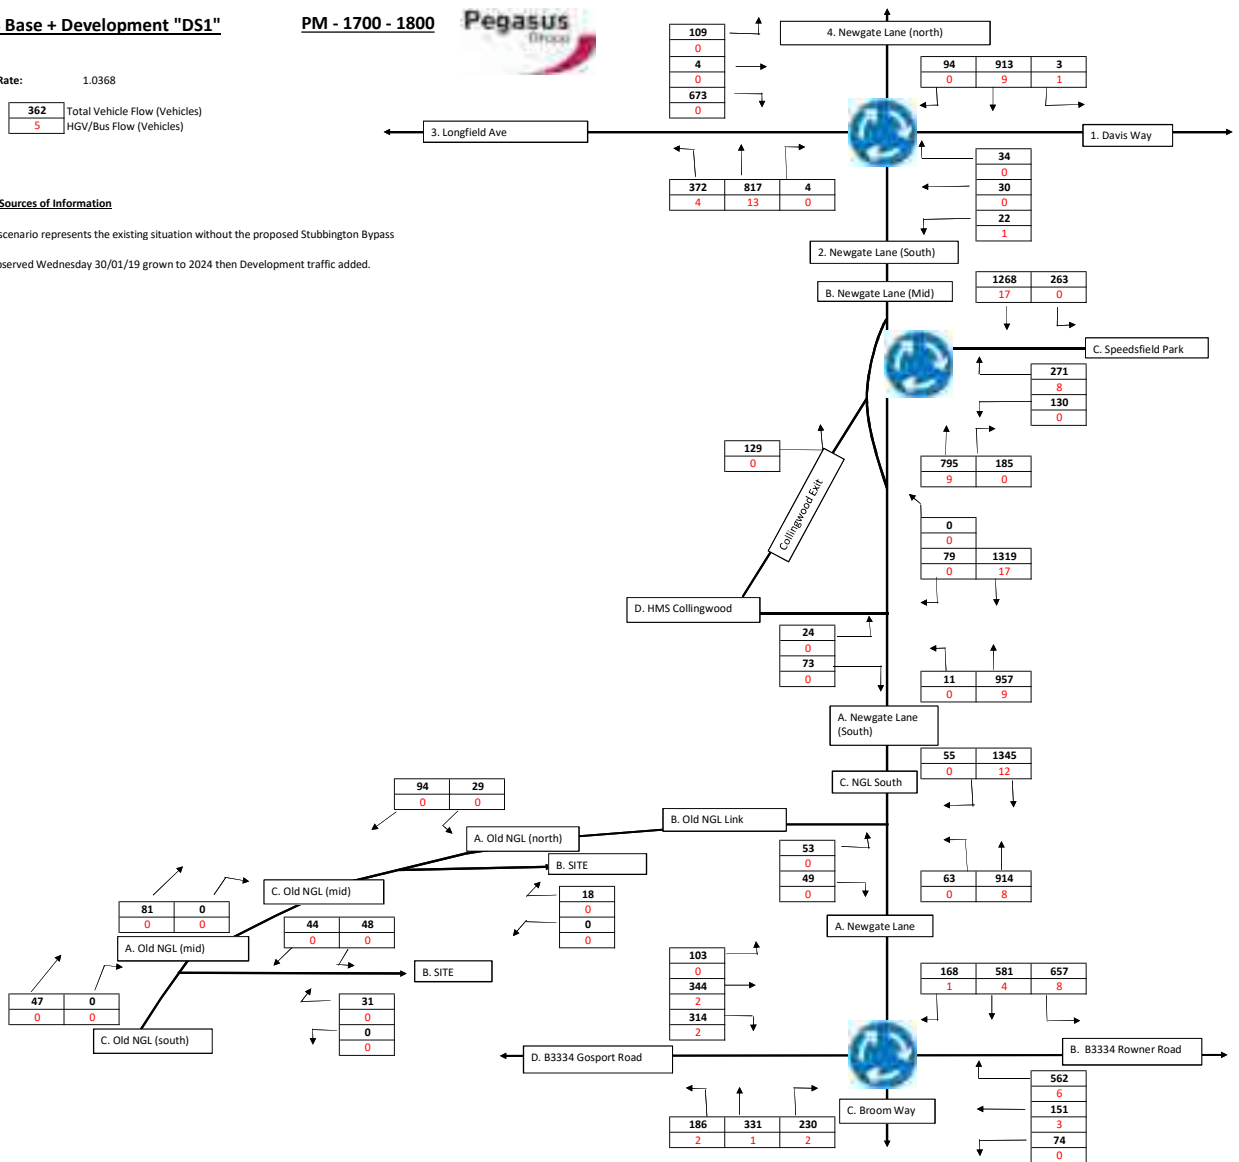

**2024 Base + Development "DS2"**

AM - 0800 - 0900




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

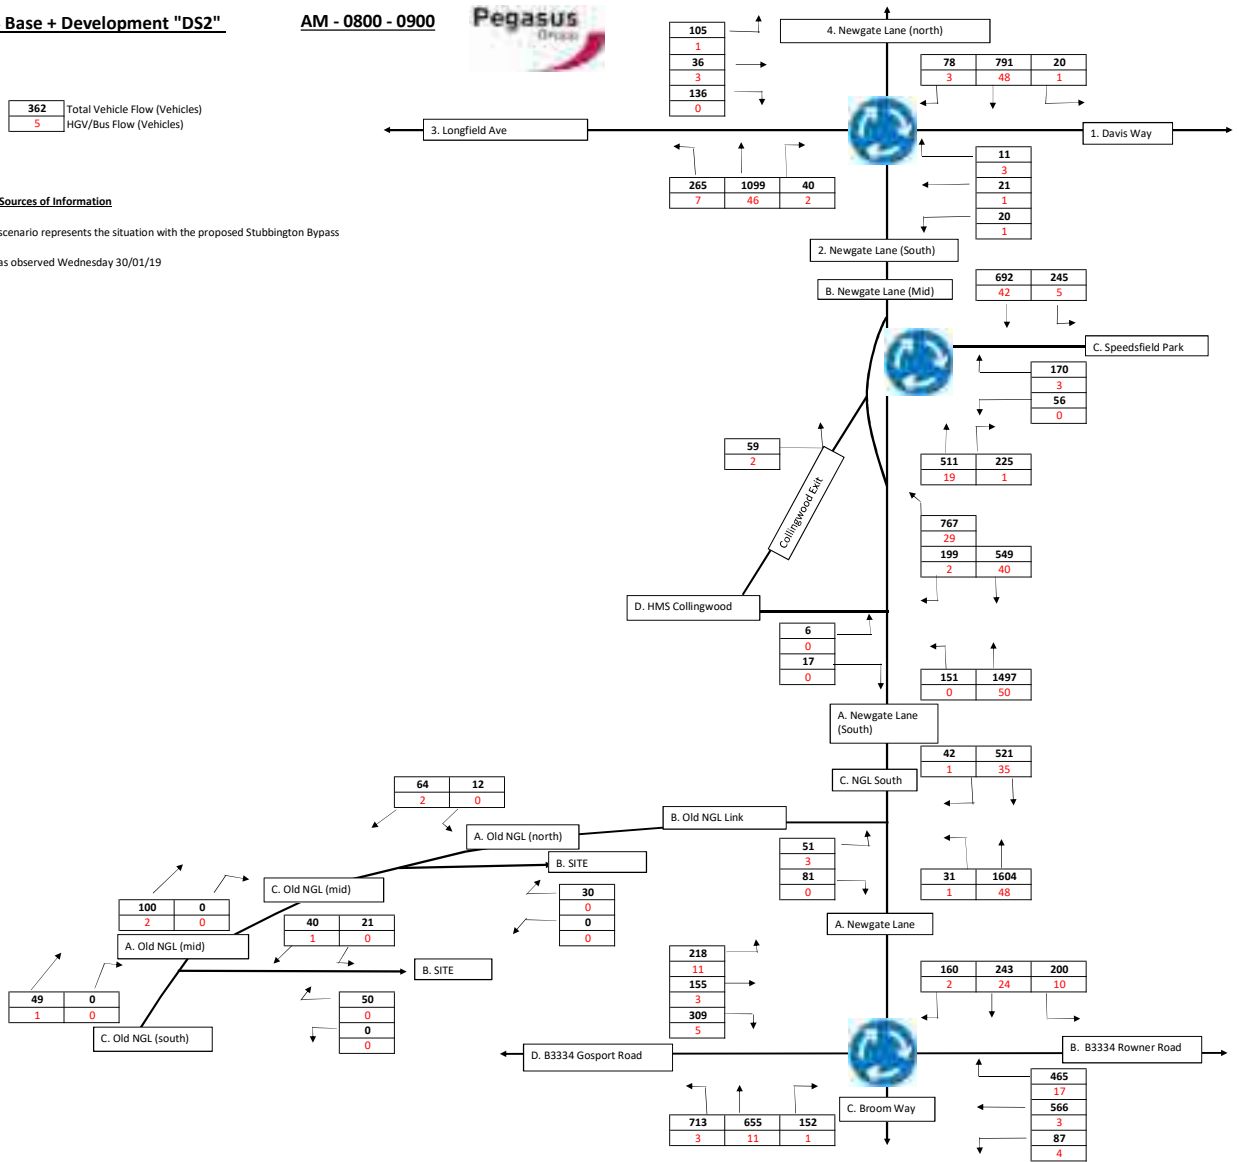



**2024 Base + Development "DS2"**

PM - 1700 - 1800




Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

Traffic was observed Wednesday 30/01/19

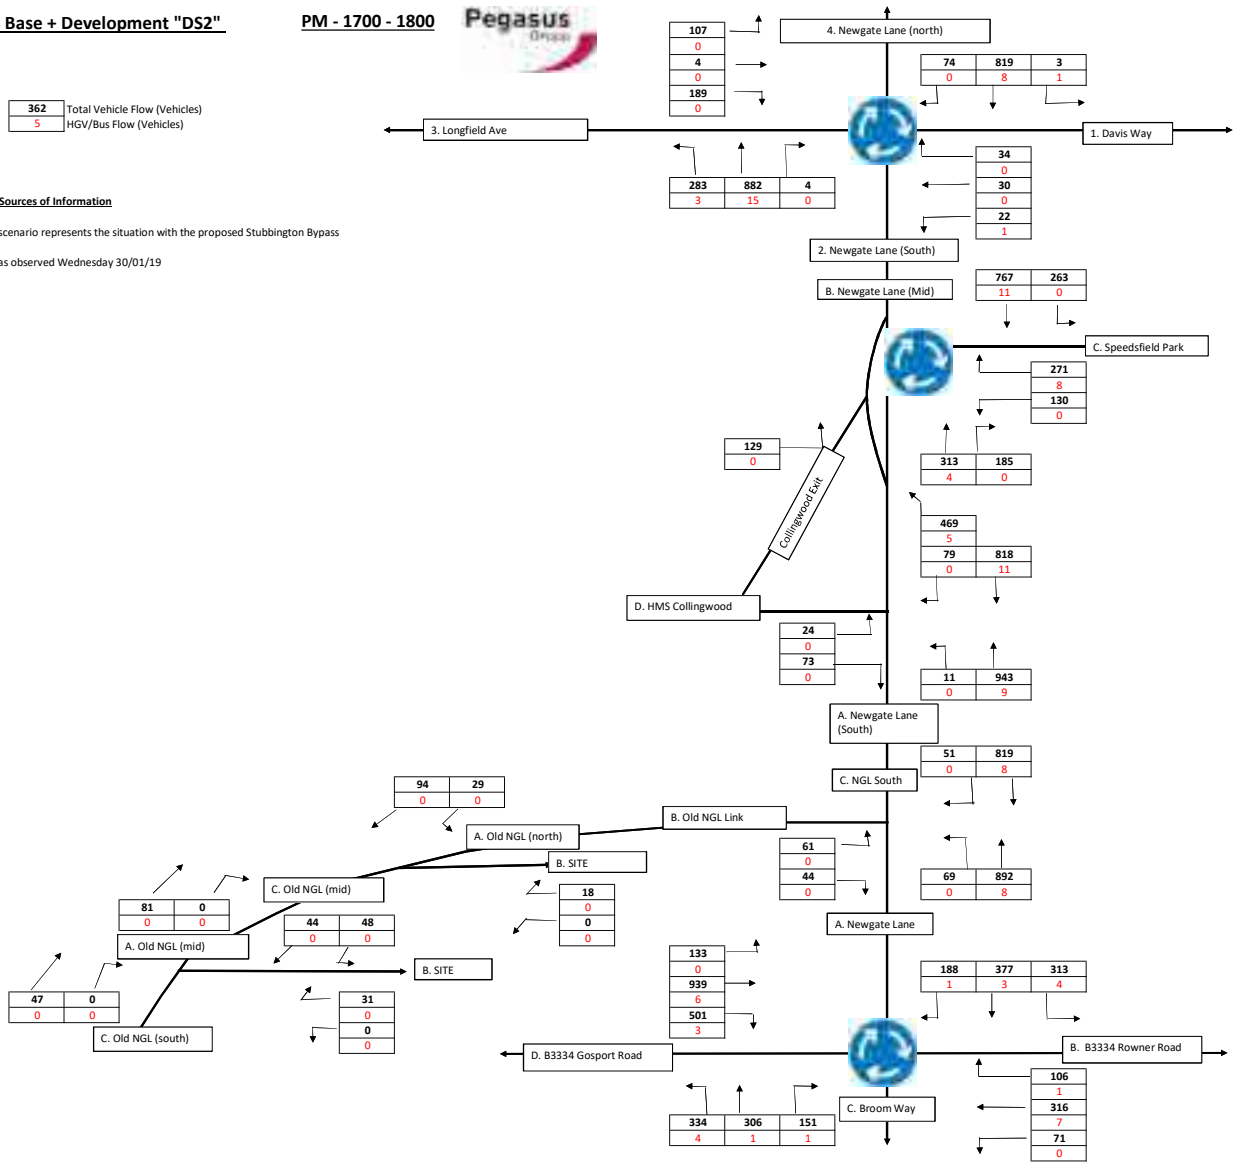

## **APPENDIX 10**

### **2024 MODELLING OUTPUTS**

# Junctions 9

## PICADY 9 - Priority Intersection Module

Version: 9.5.0.6896

© Copyright TRL Limited, 2018

For sales and distribution information, program advice and maintenance, contact TRL:

+44 (0)1344 379777 software@trl.co.uk www.trlsoftware.co.uk

The users of this computer program for the solution of an engineering problem are in no way relieved of their responsibility for the correctness of the solution

**Filename:** Old Newgate Ln NGLS redes.j9

**Path:** \\Pg-brs-dc01\data\Bristol Projects\Bristol - Live Projects\BRS.4901 - BRS.5000\BRS.4989 - SUSTAINABLE LAND PLC - LAND TO THE NORTH OF GOSPORT ROAD, FAREHAM\Transport\7. Junction Modelling\b. PICADY\19

**Report generation date:** 26/02/2019 14:33:50

- 
- »2019 DS1 Base, AM
  - »2019 DS1 Base, PM
  - »2024 DS1 Base, AM
  - »2024 DS1 Base, PM
  - »2024 DS1 Base + Dev, AM
  - »2024 DS1 Base + Dev, PM
  - »2019 DS2 Base, AM
  - »2019 DS2 Base, PM
  - »2024 DS2 Base, AM
  - »2024 DS2 Base, PM
  - »2024 DS2 Base + Dev, AM
  - »2024 DS2 Base + Dev, PM

## Summary of junction performance

	AM				PM			
	Queue (PCU)	Delay (s)	RFC	LOS	Queue (PCU)	Delay (s)	RFC	LOS
<b>2019 DS1 Base</b>								
Stream B-C	0.1	16.07	0.08	C	0.1	8.39	0.05	A
Stream B-A	0.4	52.43	0.27	F	0.2	21.66	0.14	C
Stream C-AB	0.1	10.59	0.06	B	0.0	6.07	0.04	A
<b>2024 DS1 Base</b>								
Stream B-C	0.1	17.68	0.09	C	0.1	8.62	0.05	A
Stream B-A	0.5	74.38	0.35	F	0.2	24.23	0.16	C
Stream C-AB	0.1	11.22	0.07	B	0.0	6.19	0.04	A
<b>2024 DS1 Base + Dev</b>								
Stream B-C	15.0	1360.34	1.20	F	0.1	9.54	0.12	A
Stream B-A	24.3	1302.02	1.21	F	0.4	33.31	0.31	D
Stream C-AB	0.2	11.92	0.13	B	0.1	6.73	0.09	A
<b>2019 DS2 Base</b>								
Stream B-C	0.1	15.06	0.09	C	0.1	7.90	0.06	A
Stream B-A	0.2	32.16	0.15	D	0.1	14.58	0.09	B
Stream C-AB	0.1	10.52	0.05	B	0.0	5.97	0.03	A
<b>2024 DS2 Base</b>								
Stream B-C	0.1	16.16	0.10	C	0.1	8.09	0.07	A
Stream B-A	0.2	38.24	0.18	E	0.1	15.43	0.09	C
Stream C-AB	0.1	11.15	0.06	B	0.0	6.09	0.03	A
<b>2024 DS2 Base + Dev</b>								
Stream B-C	0.5	34.30	0.33	D	0.2	8.96	0.13	A
Stream B-A	2.4	109.52	0.72	F	0.2	18.25	0.18	C
Stream C-AB	0.1	11.77	0.12	B	0.1	6.61	0.09	A

There are warnings associated with one or more model runs - see the 'Data Errors and Warnings' tables for each Analysis or Demand Set.

Values shown are the highest values encountered over all time segments. Delay is the maximum value of average delay per arriving vehicle.


## File summary

### File Description

Title	(untitled)
Location	
Site number	
Date	19/04/2018
Version	
Status	(new file)
Identifier	
Client	
Jobnumber	
Enumerator	PEGASUSGROUP\Philip.Wragg
Description	

## Units

Distance units	Speed units	Traffic units input	Traffic units results	Flow units	Average delay units	Total delay units	Rate of delay units
m	kph	Veh	PCU	perHour	s	-Min	perMin

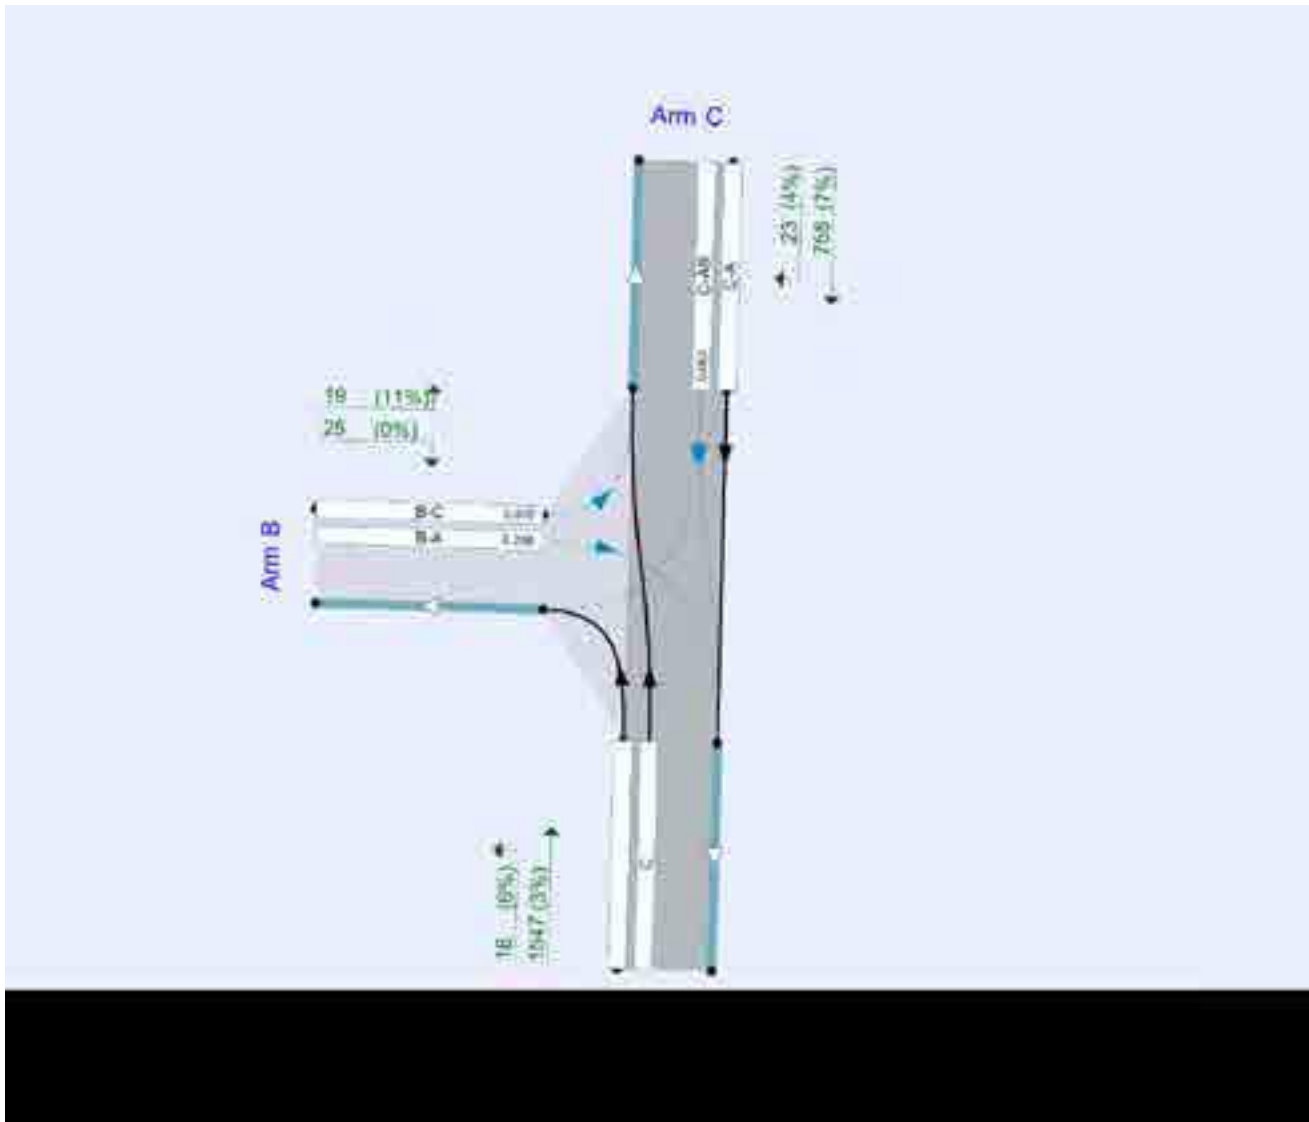

The junction diagram reflects the last run of Junctions.

**Analysis Options**

Vehicle length (m)	Calculate Queue Percentiles	Calculate detailed queueing delay	Calculate residual capacity	RFC Threshold	Average Delay threshold (s)	Queue threshold (PCU)
5.75	✓			0.85	36.00	20.00

### Demand Set Summary

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D1	2019 DS1 Base	AM	Flows from DS1 scenarios in Bypass TA	FLAT	07:45	09:15	90	15	✓
D2	2019 DS1 Base	PM	Flows from DS1 scenarios in Bypass TA	FLAT	16:45	18:15	90	15	✓
D3	2024 DS1 Base	AM	Base (no Stubbington bypass) to 2024 growth	FLAT	07:45	09:15	90	15	✓
D4	2024 DS1 Base	PM	Base (no Stubbington bypass) growth to 2024	FLAT	16:45	18:15	90	15	✓
D5	2024 DS1 Base + Dev	AM	Base (no Stubbington bypass) to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓
D6	2024 DS1 Base + Dev	PM	Base (no Stubbington bypass) growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓
D7	2019 DS2 Base	AM		FLAT	07:45	09:15	90	15	✓
D8	2019 DS2 Base	PM		FLAT	16:45	18:15	90	15	✓
D9	2024 DS2 Base	AM	Base to 2024 growth	FLAT	07:45	09:15	90	15	✓
D10	2024 DS2 Base	PM	Base growth to 2024	FLAT	16:45	18:15	90	15	✓
D11	2024 DS2 Base + Dev	AM	Base to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓
D12	2024 DS2 Base + Dev	PM	Base growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

### Analysis Set Details

ID	Include in report	Network flow scaling factor (%)	Network capacity scaling factor (%)
A1	✓	100.000	100.000

# 2019 DS1 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.76	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Arms

### Arms

Arm	Name	Description	Arm type
A	NGL South (South)		Major
B	Old NGL		Minor
C	NGL South (North)		Major

### Major Arm Geometry

Arm	Width of carriageway (m)	Has kerbed central reserve	Width of kerbed central reserve (m)	Has right turn bay	Width for right turn (m)	Visibility for right turn (m)	Blocks?	Blocking queue (PCU)
C	7.30	✓	4.00	✓	4.80	250.0	✓	10.00

Geometries for Arm C are measured opposite Arm B. Geometries for Arm A (if relevant) are measured opposite Arm D.

### Minor Arm Geometry

Arm	Minor arm type	Width at give-way (m)	Width at 5m (m)	Width at 10m (m)	Width at 15m (m)	Width at 20m (m)	Estimate flare length	Flare length (PCU)	Visibility to left (m)	Visibility to right (m)
B	One lane plus flare	10.00	9.50	6.30	5.35	5.10		3.00	94	75

## Slope / Intercept / Capacity

### Priority Intersection Slopes and Intercepts

Junction	Stream	Intercept (PCU/hr)	Slope for A-B	Slope for A-C	Slope for C-A	Slope for C-B
1	B-A	643	0.102	0.257	0.161	0.367
1	B-C	700	0.101	0.256	-	-
1	C-B	922	0.337	0.337	-	-

The slopes and intercepts shown above do NOT include any corrections or adjustments.

Streams may be combined, in which case capacity will be adjusted.

Values are shown for the first time segment only; they may differ for subsequent time segments.

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D1	2019 DS1 Base	AM	Flows from DS1 scenarios in Bypass TA	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1565	100.000
B		FLAT	✓	44	100.000
C		FLAT	✓	781	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	18	1547
	B	25	0	19
	C	758	23	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.57	0.00	0.43
	C	0.97	0.03	0.00

## Vehicle Mix

### Heavy Vehicle Percentages

	To			
	A	B	C	
From	A	0	6	3
	B	0	0	11
	C	7	4	0

### Average PCU Per Veh

	To			
	A	B	C	
From	A	1.000	1.056	1.030
	B	1.000	1.000	1.105
	C	1.067	1.043	1.000



## Detailed Demand Data

### Demand for each time segment

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1565	1612
	B	44	46
	C	781	833
08:00-08:15	A	1565	1612
	B	44	46
	C	781	833
08:15-08:30	A	1565	1612
	B	44	46
	C	781	833
08:30-08:45	A	1565	1612
	B	44	46
	C	781	833
08:45-09:00	A	1565	1612
	B	44	46
	C	781	833
09:00-09:15	A	1565	1612
	B	44	46
	C	781	833

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.08	16.07	0.1	~1	C	21	32
B-A	0.27	52.43	0.4	~1	F	25	38
C-AB	0.06	10.59	0.1	~1	B	24	36
C-A						809	1213
A-B						19	29
A-C						1593	2390

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	21	5	271	0.078	21	0.0	0.1	15.893	C
B-A	25	6	93	0.268	24	0.0	0.3	50.713	F
C-AB	24	6	379	0.063	24	0.0	0.1	10.581	B
C-A	809	202			809				
A-B	19	5			19				
A-C	1593	398			1593				

**08:00 - 08:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	21	5	269	0.078	21	0.1	0.1	16.060	C
B-A	25	6	94	0.267	25	0.3	0.4	52.338	F
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	809	202			809				
A-B	19	5			19				
A-C	1593	398			1593				

**08:15 - 08:30**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	21	5	269	0.078	21	0.1	0.1	16.064	C
B-A	25	6	94	0.267	25	0.4	0.4	52.397	F
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	809	202			809				
A-B	19	5			19				
A-C	1593	398			1593				

**08:30 - 08:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	21	5	269	0.078	21	0.1	0.1	16.066	C
B-A	25	6	94	0.267	25	0.4	0.4	52.414	F
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	809	202			809				
A-B	19	5			19				
A-C	1593	398			1593				

**08:45 - 09:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	21	5	269	0.078	21	0.1	0.1	16.067	C
B-A	25	6	94	0.267	25	0.4	0.4	52.422	F
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	809	202			809				
A-B	19	5			19				
A-C	1593	398			1593				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	21	5	269	0.078	21	0.1	0.1	16.068	C
B-A	25	6	94	0.267	25	0.4	0.4	52.429	F
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	809	202			809				
A-B	19	5			19				
A-C	1593	398			1593				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.09	~1	~1	~1	~1			N/A	N/A
B-A	0.34	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.09	~1	~1	~1	~1			N/A	N/A
B-A	0.35	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.09	~1	~1	~1	~1			N/A	N/A
B-A	0.36	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.09	~1	~1	~1	~1			N/A	N/A
B-A	0.36	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.09	~1	~1	~1	~1			N/A	N/A
B-A	0.36	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.09	~1	~1	~1	~1			N/A	N/A
B-A	0.36	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

# 2019 DS1 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.41	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D2	2019 DS1 Base	PM	Flows from DS1 scenarios in Bypass TA	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	899	100.000
B		FLAT	✓	51	100.000
C		FLAT	✓	1320	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	17	882
B	28	0	23
C	1297	23	0

### Proportions

From	To		
	A	B	C
A	0.00	0.02	0.98
B	0.55	0.00	0.45
C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	899	907
	B	51	51
	C	1320	1332
17:00-17:15	A	899	907
	B	51	51
	C	1320	1332
17:15-17:30	A	899	907
	B	51	51
	C	1320	1332
17:30-17:45	A	899	907
	B	51	51
	C	1320	1332
17:45-18:00	A	899	907
	B	51	51
	C	1320	1332
18:00-18:15	A	899	907
	B	51	51
	C	1320	1332

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.05	8.39	0.1	~1	A	23	35
B-A	0.14	21.66	0.2	~1	C	28	42
C-AB	0.04	6.07	0.0	~1	A	23	35
C-A						1309	1963
A-B						17	26
A-C						890	1335

## Main Results for each time segment

### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	23	6	453	0.051	23	0.0	0.1	8.370	A
B-A	28	7	194	0.144	27	0.0	0.2	21.518	C
C-AB	23	6	616	0.037	23	0.0	0.0	6.063	A
C-A	1309	327			1309				
A-B	17	4			17				
A-C	890	223			890				

### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	23	6	452	0.051	23	0.1	0.1	8.394	A
B-A	28	7	194	0.144	28	0.2	0.2	21.658	C
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1309	327			1309				
A-B	17	4			17				
A-C	890	223			890				

### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	23	6	452	0.051	23	0.1	0.1	8.394	A
B-A	28	7	194	0.144	28	0.2	0.2	21.661	C
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1309	327			1309				
A-B	17	4			17				
A-C	890	223			890				

### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	23	6	452	0.051	23	0.1	0.1	8.394	A
B-A	28	7	194	0.144	28	0.2	0.2	21.663	C
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1309	327			1309				
A-B	17	4			17				
A-C	890	223			890				

### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	23	6	452	0.051	23	0.1	0.1	8.394	A
B-A	28	7	194	0.144	28	0.2	0.2	21.663	C
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1309	327			1309				
A-B	17	4			17				
A-C	890	223			890				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	23	6	452	0.051	23	0.1	0.1	8.394	A
B-A	28	7	194	0.144	28	0.2	0.2	21.663	C
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1309	327			1309				
A-B	17	4			17				
A-C	890	223			890				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.05	~1	~1	~1	~1			N/A	N/A
B-A	0.16	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.05	~1	~1	~1	~1			N/A	N/A
B-A	0.17	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.05	~1	~1	~1	~1			N/A	N/A
B-A	0.17	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.05	~1	~1	~1	~1			N/A	N/A
B-A	0.17	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.05	~1	~1	~1	~1			N/A	N/A
B-A	0.17	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.05	~1	~1	~1	~1			N/A	N/A
B-A	0.17	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

# 2024 DS1 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		1.00	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D3	2024 DS1 Base	AM	Base (no Stubbington bypass) to 2024 growth	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1620	100.000
B		FLAT	✓	46	100.000
C		FLAT	✓	809	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	19	1602
	B	26	0	20
	C	785	24	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.57	0.00	0.43
	C	0.97	0.03	0.00

## Vehicle Mix



**Heavy Vehicle Percentages**

		To		
		A	B	C
From	A	0	6	3
	B	0	0	11
	C	7	4	0

**Average PCU Per Veh**

		To		
		A	B	C
From	A	1.000	1.056	1.030
	B	1.000	1.000	1.105
	C	1.067	1.043	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1620	1669
	B	46	48
	C	809	862
08:00-08:15	A	1620	1669
	B	46	48
	C	809	862
08:15-08:30	A	1620	1669
	B	46	48
	C	809	862
08:30-08:45	A	1620	1669
	B	46	48
	C	809	862
08:45-09:00	A	1620	1669
	B	46	48
	C	809	862
09:00-09:15	A	1620	1669
	B	46	48
	C	809	862

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.09	17.68	0.1	~1	C	22	33
B-A	0.35	74.38	0.5	~1	F	26	39
C-AB	0.07	11.22	0.1	~1	B	25	37
C-A						838	1256
A-B						20	30
A-C						1649	2474

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	22	5	250	0.087	21	0.0	0.1	17.339	C
B-A	26	6	74	0.350	24	0.0	0.5	69.802	F
C-AB	25	6	360	0.069	25	0.0	0.1	11.203	B
C-A	838	209			838				
A-B	20	5			20				
A-C	1649	412			1649				

#### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	22	5	247	0.088	22	0.1	0.1	17.649	C
B-A	26	6	74	0.349	26	0.5	0.5	74.002	F
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	838	209			838				
A-B	20	5			20				
A-C	1649	412			1649				

#### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	22	5	247	0.088	22	0.1	0.1	17.665	C
B-A	26	6	74	0.349	26	0.5	0.5	74.230	F
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	838	209			838				
A-B	20	5			20				
A-C	1649	412			1649				

#### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	22	5	247	0.088	22	0.1	0.1	17.671	C
B-A	26	6	74	0.349	26	0.5	0.5	74.314	F
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	838	209			838				
A-B	20	5			20				
A-C	1649	412			1649				

#### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	22	5	247	0.088	22	0.1	0.1	17.673	C
B-A	26	6	74	0.349	26	0.5	0.5	74.356	F
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	838	209			838				
A-B	20	5			20				
A-C	1649	412			1649				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	22	5	247	0.088	22	0.1	0.1	17.675	C
B-A	26	6	74	0.349	26	0.5	0.5	74.381	F
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	838	209			838				
A-B	20	5			20				
A-C	1649	412			1649				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.10	~1	~1	~1	~1			N/A	N/A
B-A	0.48	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.51	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.51	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.52	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.52	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.52	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

# 2024 DS1 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.45	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D4	2024 DS1 Base	PM	Base (no Stubbington bypass) growth to 2024	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	932	100.000
B		FLAT	✓	53	100.000
C		FLAT	✓	1369	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	18	914
B	29	0	24
C	1345	24	0

### Proportions

From	To		
	A	B	C
A	0.00	0.02	0.98
B	0.55	0.00	0.45
C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	932	940
	B	53	53
	C	1369	1381
17:00-17:15	A	932	940
	B	53	53
	C	1369	1381
17:15-17:30	A	932	940
	B	53	53
	C	1369	1381
17:30-17:45	A	932	940
	B	53	53
	C	1369	1381
17:45-18:00	A	932	940
	B	53	53
	C	1369	1381
18:00-18:15	A	932	940
	B	53	53
	C	1369	1381

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.05	8.62	0.1	~1	A	24	36
B-A	0.16	24.23	0.2	~1	C	29	44
C-AB	0.04	6.19	0.0	~1	A	24	36
C-A						1357	2036
A-B						18	26
A-C						923	1384

## Main Results for each time segment

### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	24	6	442	0.054	24	0.0	0.1	8.592	A
B-A	29	7	177	0.164	28	0.0	0.2	24.019	C
C-AB	24	6	605	0.039	24	0.0	0.0	6.189	A
C-A	1357	339			1357				
A-B	18	4			18				
A-C	923	231			923				

### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	24	6	441	0.054	24	0.1	0.1	8.622	A
B-A	29	7	178	0.163	29	0.2	0.2	24.222	C
C-AB	24	6	605	0.039	24	0.0	0.0	6.192	A
C-A	1357	339			1357				
A-B	18	4			18				
A-C	923	231			923				

### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	24	6	441	0.054	24	0.1	0.1	8.623	A
B-A	29	7	178	0.163	29	0.2	0.2	24.227	C
C-AB	24	6	605	0.039	24	0.0	0.0	6.192	A
C-A	1357	339			1357				
A-B	18	4			18				
A-C	923	231			923				

### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	24	6	441	0.054	24	0.1	0.1	8.623	A
B-A	29	7	178	0.163	29	0.2	0.2	24.226	C
C-AB	24	6	605	0.039	24	0.0	0.0	6.192	A
C-A	1357	339			1357				
A-B	18	4			18				
A-C	923	231			923				

### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	24	6	441	0.054	24	0.1	0.1	8.623	A
B-A	29	7	178	0.163	29	0.2	0.2	24.229	C
C-AB	24	6	605	0.039	24	0.0	0.0	6.192	A
C-A	1357	339			1357				
A-B	18	4			18				
A-C	923	231			923				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	24	6	441	0.054	24	0.1	0.1	8.623	A
B-A	29	7	178	0.163	29	0.2	0.2	24.228	C
C-AB	24	6	605	0.039	24	0.0	0.0	6.192	A
C-A	1357	339			1357				
A-B	18	4			18				
A-C	923	231			923				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.06	~1	~1	~1	~1			N/A	N/A
B-A	0.19	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.06	~1	~1	~1	~1			N/A	N/A
B-A	0.19	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.06	~1	~1	~1	~1			N/A	N/A
B-A	0.19	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.06	~1	~1	~1	~1			N/A	N/A
B-A	0.19	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.06	~1	~1	~1	~1			N/A	N/A
B-A	0.19	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.06	~1	~1	~1	~1			N/A	N/A
B-A	0.19	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

# 2024 DS1 Base + Dev, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		62.97	F

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D5	2024 DS1 Base + Dev	AM	Base (no Stubbington bypass) to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1631	100.000
B		FLAT	✓	126	100.000
C		FLAT	✓	831	100.000

## Origin-Destination Data

#### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	29	1602
	B	80	0	46
	C	785	46	0

#### Proportions

	To			
	A	B	C	
From	A	0.00	0.02	0.98
	B	0.63	0.00	0.37
	C	0.94	0.06	0.00

## Vehicle Mix



### Heavy Vehicle Percentages

From	To			
	A	B	C	
	A	0	4	3
	B	0	0	5
C	7	2	0	

### Average PCU Per Veh

From	To			
	A	B	C	
	A	1.000	1.035	1.030
	B	1.000	1.000	1.045
C	1.067	1.023	1.000	

## Detailed Demand Data

### Demand for each time segment

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1631	1680
	B	126	128
	C	831	885
08:00-08:15	A	1631	1680
	B	126	128
	C	831	885
08:15-08:30	A	1631	1680
	B	126	128
	C	831	885
08:30-08:45	A	1631	1680
	B	126	128
	C	831	885
08:45-09:00	A	1631	1680
	B	126	128
	C	831	885
09:00-09:15	A	1631	1680
	B	126	128
	C	831	885

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	1.20	1360.34	15.0	?	F	48	72
B-A	1.21	1302.02	24.3	?	F	80	119
C-AB	0.13	11.92	0.2	~1	B	47	70
C-A						838	1256
A-B						31	46
A-C						1649	2474

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	40	1.201	32	0.0	4.1	315.322	F
B-A	80	20	66	1.201	56	0.0	5.8	244.948	F
C-AB	47	12	356	0.132	46	0.0	0.2	11.876	B
C-A	838	209			838				
A-B	31	8			31				
A-C	1649	412			1649				

#### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	41	1.165	38	4.1	6.5	590.775	F
B-A	80	20	66	1.208	63	5.8	9.8	511.933	F
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	838	209			838				
A-B	31	8			31				
A-C	1649	412			1649				

#### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	41	1.172	39	6.5	8.7	792.347	F
B-A	80	20	66	1.208	64	9.8	13.6	719.058	F
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	838	209			838				
A-B	31	8			31				
A-C	1649	412			1649				

#### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	41	1.179	39	8.7	10.8	985.168	F
B-A	80	20	66	1.207	65	13.6	17.2	916.930	F
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	838	209			838				
A-B	31	8			31				
A-C	1649	412			1649				

#### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	41	1.185	40	10.8	12.9	1173.162	F
B-A	80	20	66	1.207	65	17.2	20.8	1110.710	F
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	838	209			838				
A-B	31	8			31				
A-C	1649	412			1649				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	40	1.189	40	12.9	15.0	1360.342	F
B-A	80	20	66	1.206	65	20.8	24.3	1302.015	F
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	838	209			838				
A-B	31	8			31				
A-C	1649	412			1649				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	4.06	?	?	?	?			N/A	N/A
B-A	5.77	?	?	?	?			N/A	N/A
C-AB	0.15	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	6.47	?	?	?	?			N/A	N/A
B-A	9.83	?	?	?	?			N/A	N/A
C-AB	0.15	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	8.68	?	?	?	?			N/A	N/A
B-A	13.60	?	?	?	?			N/A	N/A
C-AB	0.15	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	10.82	?	?	?	?			N/A	N/A
B-A	17.24	?	?	?	?			N/A	N/A
C-AB	0.15	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	12.93	?	?	?	?			N/A	N/A
B-A	20.81	?	?	?	?			N/A	N/A
C-AB	0.16	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	15.02	?	?	?	?			N/A	N/A
B-A	24.34	?	?	?	?			N/A	N/A
C-AB	0.16	~1	~1	~1	~1			N/A	N/A

# 2024 DS1 Base + Dev, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		1.00	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D6	2024 DS1 Base + Dev	PM	Base (no Stubbington bypass) growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	978	100.000
B		FLAT	✓	102	100.000
C		FLAT	✓	1400	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	63	914
B	49	0	53
C	1345	55	0

### Proportions

From	To		
	A	B	C
A	0.00	0.06	0.94
B	0.48	0.00	0.52
C	0.96	0.04	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	978	986
	B	102	102
	C	1400	1412
17:00-17:15	A	978	986
	B	102	102
	C	1400	1412
17:15-17:30	A	978	986
	B	102	102
	C	1400	1412
17:30-17:45	A	978	986
	B	102	102
	C	1400	1412
17:45-18:00	A	978	986
	B	102	102
	C	1400	1412
18:00-18:15	A	978	986
	B	102	102
	C	1400	1412

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.12	9.54	0.1	~1	A	53	80
B-A	0.31	33.31	0.4	~1	D	49	73
C-AB	0.09	6.73	0.1	~1	A	55	83
C-A						1357	2036
A-B						63	95
A-C						923	1384

**Main Results for each time segment**
**16:45 - 17:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	433	0.122	52	0.0	0.1	9.443	A
B-A	49	12	157	0.312	47	0.0	0.4	32.442	D
C-AB	55	14	590	0.093	55	0.0	0.1	6.724	A
C-A	1357	339			1357				
A-B	63	16			63				
A-C	923	231			923				

**17:00 - 17:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	431	0.123	53	0.1	0.1	9.535	A
B-A	49	12	157	0.311	49	0.4	0.4	33.283	D
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1357	339			1357				
A-B	63	16			63				
A-C	923	231			923				

**17:15 - 17:30**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	430	0.123	53	0.1	0.1	9.537	A
B-A	49	12	157	0.311	49	0.4	0.4	33.302	D
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1357	339			1357				
A-B	63	16			63				
A-C	923	231			923				

**17:30 - 17:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	430	0.123	53	0.1	0.1	9.538	A
B-A	49	12	157	0.311	49	0.4	0.4	33.308	D
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1357	339			1357				
A-B	63	16			63				
A-C	923	231			923				

**17:45 - 18:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	430	0.123	53	0.1	0.1	9.538	A
B-A	49	12	157	0.311	49	0.4	0.4	33.305	D
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1357	339			1357				
A-B	63	16			63				
A-C	923	231			923				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	430	0.123	53	0.1	0.1	9.538	A
B-A	49	12	157	0.311	49	0.4	0.4	33.313	D
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1357	339			1357				
A-B	63	16			63				
A-C	923	231			923				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.43	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.44	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.44	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.45	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.45	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.45	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

# 2019 DS2 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.56	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D7	2019 DS2 Base	AM	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1571	100.000
B		FLAT	✓	44	100.000
C		FLAT	✓	523	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	22	1549
	B	20	0	24
	C	504	19	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.46	0.00	0.54
	C	0.96	0.04	0.00

## Vehicle Mix



**Heavy Vehicle Percentages**

From	To		
	A	B	C
A	0	6	3
B	0	0	11
C	7	4	0

**Average PCU Per Veh**

From	To		
	A	B	C
A	1.000	1.056	1.030
B	1.000	1.000	1.105
C	1.067	1.043	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1571	1618
	B	44	46
	C	523	557
08:00-08:15	A	1571	1618
	B	44	46
	C	523	557
08:15-08:30	A	1571	1618
	B	44	46
	C	523	557
08:30-08:45	A	1571	1618
	B	44	46
	C	523	557
08:45-09:00	A	1571	1618
	B	44	46
	C	523	557
09:00-09:15	A	1571	1618
	B	44	46
	C	523	557

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.09	15.06	0.1	~1	C	26	40
B-A	0.15	32.16	0.2	~1	D	20	30
C-AB	0.05	10.52	0.1	~1	B	20	30
C-A						537	806
A-B						23	35
A-C						1595	2392

## Main Results for each time segment

### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	26	7	291	0.091	26	0.0	0.1	14.971	B
B-A	20	5	132	0.152	19	0.0	0.2	31.816	D
C-AB	20	5	377	0.053	20	0.0	0.1	10.512	B
C-A	537	134			537				
A-B	23	6			23				
A-C	1595	399			1595				

### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	26	7	291	0.091	26	0.1	0.1	15.062	C
B-A	20	5	132	0.152	20	0.2	0.2	32.148	D
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	537	134			537				
A-B	23	6			23				
A-C	1595	399			1595				

### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	26	7	291	0.091	26	0.1	0.1	15.063	C
B-A	20	5	132	0.152	20	0.2	0.2	32.155	D
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	537	134			537				
A-B	23	6			23				
A-C	1595	399			1595				

### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	26	7	291	0.091	26	0.1	0.1	15.064	C
B-A	20	5	132	0.152	20	0.2	0.2	32.156	D
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	537	134			537				
A-B	23	6			23				
A-C	1595	399			1595				

### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	26	7	291	0.091	26	0.1	0.1	15.064	C
B-A	20	5	132	0.152	20	0.2	0.2	32.157	D
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	537	134			537				
A-B	23	6			23				
A-C	1595	399			1595				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	26	7	291	0.091	26	0.1	0.1	15.064	C
B-A	20	5	132	0.152	20	0.2	0.2	32.159	D
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	537	134			537				
A-B	23	6			23				
A-C	1595	399			1595				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.17	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.18	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.18	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.18	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.18	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.18	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

# 2019 DS2 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.40	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D8	2019 DS2 Base	PM	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	883	100.000
B		FLAT	✓	54	100.000
C		FLAT	✓	809	100.000

## Origin-Destination Data

#### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	23	860
	B	23	0	31
	C	790	19	0

#### Proportions

	To			
	A	B	C	
From	A	0.00	0.03	0.97
	B	0.43	0.00	0.57
	C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

		To		
		A	B	C
From	A	0	0	1
	B	0	0	0
	C	1	0	0

**Average PCU Per Veh**

		To		
		A	B	C
From	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
	C	1.009	1.000	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	883	891
	B	54	54
	C	809	816
17:00-17:15	A	883	891
	B	54	54
	C	809	816
17:15-17:30	A	883	891
	B	54	54
	C	809	816
17:30-17:45	A	883	891
	B	54	54
	C	809	816
17:45-18:00	A	883	891
	B	54	54
	C	809	816
18:00-18:15	A	883	891
	B	54	54
	C	809	816

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.06	7.90	0.1	~1	A	31	47
B-A	0.09	14.58	0.1	~1	B	23	35
C-AB	0.03	5.97	0.0	~1	A	19	29
C-A						797	1195
A-B						23	34
A-C						868	1302

## Main Results for each time segment

### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	31	8	487	0.064	31	0.0	0.1	7.883	A
B-A	23	6	270	0.086	23	0.0	0.1	14.549	B
C-AB	19	5	622	0.031	19	0.0	0.0	5.971	A
C-A	797	199			797				
A-B	23	6			23				
A-C	868	217			868				

### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	31	8	487	0.064	31	0.1	0.1	7.900	A
B-A	23	6	270	0.086	23	0.1	0.1	14.585	B
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	797	199			797				
A-B	23	6			23				
A-C	868	217			868				

### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	31	8	487	0.064	31	0.1	0.1	7.900	A
B-A	23	6	270	0.086	23	0.1	0.1	14.585	B
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	797	199			797				
A-B	23	6			23				
A-C	868	217			868				

### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	31	8	487	0.064	31	0.1	0.1	7.900	A
B-A	23	6	270	0.086	23	0.1	0.1	14.585	B
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	797	199			797				
A-B	23	6			23				
A-C	868	217			868				

### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	31	8	487	0.064	31	0.1	0.1	7.900	A
B-A	23	6	270	0.086	23	0.1	0.1	14.585	B
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	797	199			797				
A-B	23	6			23				
A-C	868	217			868				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	31	8	487	0.064	31	0.1	0.1	7.900	A
B-A	23	6	270	0.086	23	0.1	0.1	14.585	B
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	797	199			797				
A-B	23	6			23				
A-C	868	217			868				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.09	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.09	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.09	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.09	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.09	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.09	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

# 2024 DS2 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.64	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D9	2024 DS2 Base	AM	Base to 2024 growth	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1626	100.000
B		FLAT	✓	45	100.000
C		FLAT	✓	541	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	23	1604
	B	21	0	25
	C	521	20	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.46	0.00	0.54
	C	0.96	0.04	0.00

## Vehicle Mix



### Heavy Vehicle Percentages

From	To		
	A	B	C
A	0	6	3
B	0	0	11
C	7	4	0

### Average PCU Per Veh

From	To		
	A	B	C
A	1.000	1.056	1.030
B	1.000	1.000	1.105
C	1.067	1.043	1.000

## Detailed Demand Data

### Demand for each time segment

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1626	1675
	B	45	48
	C	541	577
08:00-08:15	A	1626	1675
	B	45	48
	C	541	577
08:15-08:30	A	1626	1675
	B	45	48
	C	541	577
08:30-08:45	A	1626	1675
	B	45	48
	C	541	577
08:45-09:00	A	1626	1675
	B	45	48
	C	541	577
09:00-09:15	A	1626	1675
	B	45	48
	C	541	577

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.10	16.16	0.1	~1	C	27	41
B-A	0.18	38.24	0.2	~1	E	21	31
C-AB	0.06	11.15	0.1	~1	B	21	31
C-A						556	835
A-B						24	36
A-C						1651	2477

## Main Results for each time segment

### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	27	7	275	0.100	27	0.0	0.1	16.032	C
B-A	21	5	115	0.181	20	0.0	0.2	37.652	E
C-AB	21	5	357	0.058	20	0.0	0.1	11.134	B
C-A	556	139			556				
A-B	24	6			24				
A-C	1651	413			1651				

### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	27	7	274	0.100	27	0.1	0.1	16.156	C
B-A	21	5	115	0.180	21	0.2	0.2	38.215	E
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	556	139			556				
A-B	24	6			24				
A-C	1651	413			1651				

### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	27	7	274	0.100	27	0.1	0.1	16.158	C
B-A	21	5	115	0.180	21	0.2	0.2	38.228	E
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	556	139			556				
A-B	24	6			24				
A-C	1651	413			1651				

### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	27	7	274	0.100	27	0.1	0.1	16.158	C
B-A	21	5	115	0.180	21	0.2	0.2	38.233	E
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	556	139			556				
A-B	24	6			24				
A-C	1651	413			1651				

### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	27	7	274	0.100	27	0.1	0.1	16.159	C
B-A	21	5	115	0.180	21	0.2	0.2	38.234	E
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	556	139			556				
A-B	24	6			24				
A-C	1651	413			1651				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	27	7	274	0.100	27	0.1	0.1	16.159	C
B-A	21	5	115	0.180	21	0.2	0.2	38.235	E
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	556	139			556				
A-B	24	6			24				
A-C	1651	413			1651				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.21	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.21	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

# 2024 DS2 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.41	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D10	2024 DS2 Base	PM	Base growth to 2024	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	916	100.000
B		FLAT	✓	56	100.000
C		FLAT	✓	839	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	24	892
	B	24	0	32
	C	819	20	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.03	0.97
	B	0.43	0.00	0.57
	C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	916	924
	B	56	56
	C	839	846
17:00-17:15	A	916	924
	B	56	56
	C	839	846
17:15-17:30	A	916	924
	B	56	56
	C	839	846
17:30-17:45	A	916	924
	B	56	56
	C	839	846
17:45-18:00	A	916	924
	B	56	56
	C	839	846
18:00-18:15	A	916	924
	B	56	56
	C	839	846

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.07	8.09	0.1	~1	A	32	48
B-A	0.09	15.43	0.1	~1	C	24	36
C-AB	0.03	6.09	0.0	~1	A	20	30
C-A						826	1239
A-B						24	35
A-C						900	1350

## Main Results for each time segment

### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	32	8	478	0.068	32	0.0	0.1	8.070	A
B-A	24	6	257	0.094	24	0.0	0.1	15.387	C
C-AB	20	5	611	0.033	20	0.0	0.0	6.090	A
C-A	826	207			826				
A-B	24	6			24				
A-C	900	225			900				

### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	32	8	477	0.068	32	0.1	0.1	8.088	A
B-A	24	6	257	0.093	24	0.1	0.1	15.431	C
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	826	207			826				
A-B	24	6			24				
A-C	900	225			900				

### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	32	8	477	0.068	32	0.1	0.1	8.088	A
B-A	24	6	257	0.093	24	0.1	0.1	15.431	C
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	826	207			826				
A-B	24	6			24				
A-C	900	225			900				

### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	32	8	477	0.068	32	0.1	0.1	8.088	A
B-A	24	6	257	0.093	24	0.1	0.1	15.431	C
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	826	207			826				
A-B	24	6			24				
A-C	900	225			900				

### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	32	8	477	0.068	32	0.1	0.1	8.088	A
B-A	24	6	257	0.093	24	0.1	0.1	15.431	C
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	826	207			826				
A-B	24	6			24				
A-C	900	225			900				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	32	8	477	0.068	32	0.1	0.1	8.088	A
B-A	24	6	257	0.093	24	0.1	0.1	15.431	C
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	826	207			826				
A-B	24	6			24				
A-C	900	225			900				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.10	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.10	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.10	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.10	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.10	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.07	~1	~1	~1	~1			N/A	N/A
B-A	0.10	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

# 2024 DS2 Base + Dev, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		4.64	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D11	2024 DS2 Base + Dev	AM	Base to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1634	100.000
B		FLAT	✓	132	100.000
C		FLAT	✓	563	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	31	1604
	B	81	0	51
	C	521	42	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.02	0.98
	B	0.61	0.00	0.39
	C	0.93	0.07	0.00

## Vehicle Mix



**Heavy Vehicle Percentages**

		To		
		A	B	C
From	A	0	4	3
	B	0	0	5
	C	7	2	0

**Average PCU Per Veh**

		To		
		A	B	C
From	A	1.000	1.041	1.030
	B	1.000	1.000	1.051
	C	1.067	1.020	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1634	1683
	B	132	135
	C	563	599
08:00-08:15	A	1634	1683
	B	132	135
	C	563	599
08:15-08:30	A	1634	1683
	B	132	135
	C	563	599
08:30-08:45	A	1634	1683
	B	132	135
	C	563	599
08:45-09:00	A	1634	1683
	B	132	135
	C	563	599
09:00-09:15	A	1634	1683
	B	132	135
	C	563	599

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.33	34.30	0.5	~1	D	54	81
B-A	0.72	109.52	2.4	?	F	81	122
C-AB	0.12	11.77	0.1	~1	B	43	64
C-A						556	835
A-B						32	48
A-C						1651	2477

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	54	13	190	0.282	52	0.0	0.4	27.156	D
B-A	81	20	113	0.718	74	0.0	1.9	81.453	F
C-AB	43	11	355	0.120	42	0.0	0.1	11.734	B
C-A	556	139			556				
A-B	32	8			32				
A-C	1651	413			1651				

#### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	54	13	170	0.316	53	0.4	0.5	32.451	D
B-A	81	20	113	0.717	80	1.9	2.1	103.178	F
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	556	139			556				
A-B	32	8			32				
A-C	1651	413			1651				

#### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	54	13	167	0.322	54	0.5	0.5	33.441	D
B-A	81	20	113	0.717	81	2.1	2.2	106.573	F
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	556	139			556				
A-B	32	8			32				
A-C	1651	413			1651				

#### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	54	13	165	0.325	54	0.5	0.5	33.876	D
B-A	81	20	113	0.717	81	2.2	2.3	108.090	F
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	556	139			556				
A-B	32	8			32				
A-C	1651	413			1651				

#### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	54	13	164	0.327	54	0.5	0.5	34.132	D
B-A	81	20	113	0.717	81	2.3	2.3	108.959	F
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	556	139			556				
A-B	32	8			32				
A-C	1651	413			1651				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	54	13	164	0.328	54	0.5	0.5	34.297	D
B-A	81	20	113	0.717	81	2.3	2.4	109.523	F
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	556	139			556				
A-B	32	8			32				
A-C	1651	413			1651				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.40	~1	~1	~1	~1			N/A	N/A
B-A	1.87	?	?	?	?			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.47	~1	~1	~1	~1			N/A	N/A
B-A	2.12	?	?	?	?			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.48	~1	~1	~1	~1			N/A	N/A
B-A	2.24	?	?	?	?			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.49	~1	~1	~1	~1			N/A	N/A
B-A	2.30	?	?	?	?			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.50	~1	~1	~1	~1			N/A	N/A
B-A	2.34	?	?	?	?			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.50	~1	~1	~1	~1			N/A	N/A
B-A	2.37	?	?	?	?			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

# 2024 DS2 Base + Dev, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.87	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D12	2024 DS2 Base + Dev	PM	Base growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	961	100.000
B		FLAT	✓	105	100.000
C		FLAT	✓	870	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	69	892
	B	44	0	61
	C	819	51	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.07	0.93
	B	0.42	0.00	0.58
	C	0.94	0.06	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	961	970
	B	105	105
	C	870	877
17:00-17:15	A	961	970
	B	105	105
	C	870	877
17:15-17:30	A	961	970
	B	105	105
	C	870	877
17:30-17:45	A	961	970
	B	105	105
	C	870	877
17:45-18:00	A	961	970
	B	105	105
	C	870	877
18:00-18:15	A	961	970
	B	105	105
	C	870	877

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.13	8.96	0.2	~1	A	61	92
B-A	0.18	18.25	0.2	~1	C	44	66
C-AB	0.09	6.61	0.1	~1	A	51	77
C-A						826	1239
A-B						69	104
A-C						900	1350

## Main Results for each time segment

### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	61	15	464	0.132	61	0.0	0.2	8.921	A
B-A	44	11	241	0.182	43	0.0	0.2	18.103	C
C-AB	51	13	595	0.086	51	0.0	0.1	6.607	A
C-A	826	207			826				
A-B	69	17			69				
A-C	900	225			900				

### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	61	15	463	0.133	61	0.2	0.2	8.964	A
B-A	44	11	241	0.182	44	0.2	0.2	18.248	C
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	826	207			826				
A-B	69	17			69				
A-C	900	225			900				

### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	61	15	463	0.133	61	0.2	0.2	8.964	A
B-A	44	11	241	0.182	44	0.2	0.2	18.251	C
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	826	207			826				
A-B	69	17			69				
A-C	900	225			900				

### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	61	15	463	0.133	61	0.2	0.2	8.964	A
B-A	44	11	241	0.182	44	0.2	0.2	18.252	C
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	826	207			826				
A-B	69	17			69				
A-C	900	225			900				

### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	61	15	463	0.133	61	0.2	0.2	8.965	A
B-A	44	11	241	0.182	44	0.2	0.2	18.252	C
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	826	207			826				
A-B	69	17			69				
A-C	900	225			900				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	61	15	463	0.133	61	0.2	0.2	8.965	A
B-A	44	11	241	0.182	44	0.2	0.2	18.252	C
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	826	207			826				
A-B	69	17			69				
A-C	900	225			900				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.22	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

# Junctions 9

## PICADY 9 - Priority Intersection Module

Version: 9.5.0.6896

© Copyright TRL Limited, 2018

For sales and distribution information, program advice and maintenance, contact TRL:

+44 (0)1344 379777 software@trl.co.uk www.trlsoftware.co.uk

The users of this computer program for the solution of an engineering problem are in no way relieved of their responsibility for the correctness of the solution

**Filename:** Old Newgate Ln NGLS rall left.j9

**Path:** \\Pg-brs-dc01\data\Bristol Projects\Bristol - Live Projects\BRS.4901 - BRS.5000\BRS.4989 - SUSTAINABLE LAND PLC - LAND TO THE NORTH OF GOSPORT ROAD, FAREHAM\Transport\7. Junction Modelling\b. PICADY\19

**Report generation date:** 26/02/2019 14:04:08

- 
- »2019 DS1 Base, AM
  - »2019 DS1 Base, PM
  - »2024 DS1 Base, AM
  - »2024 DS1 Base, PM
  - »2024 DS1 Base + Dev, AM
  - »2024 DS1 Base + Dev, PM
  - »2019 DS2 Base, AM
  - »2019 DS2 Base, PM
  - »2024 DS2 Base, AM
  - »2024 DS2 Base, PM
  - »2024 DS2 Base + Dev, AM
  - »2024 DS2 Base + Dev, PM



## Summary of junction performance

	AM				PM			
	Queue (PCU)	Delay (s)	RFC	LOS	Queue (PCU)	Delay (s)	RFC	LOS
<b>2019 DS1 Base</b>								
Stream B-C	0.2	13.06	0.14	B	0.1	7.34	0.09	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.1	10.59	0.06	B	0.0	6.07	0.04	A
<b>2024 DS1 Base</b>								
Stream B-C	0.2	13.94	0.15	B	0.1	7.51	0.10	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.1	11.22	0.07	B	0.0	6.19	0.04	A
<b>2024 DS1 Base + Dev</b>								
Stream B-C	0.7	19.39	0.40	C	0.2	8.48	0.19	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.2	11.92	0.13	B	0.1	6.73	0.09	A
<b>2019 DS2 Base</b>								
Stream B-C	0.2	13.67	0.17	B	0.1	7.53	0.13	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.1	10.52	0.05	B	0.0	5.97	0.03	A
<b>2024 DS2 Base</b>								
Stream B-C	0.2	14.67	0.19	B	0.2	7.72	0.13	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.1	11.15	0.06	B	0.0	6.09	0.03	A
<b>2024 DS2 Base + Dev</b>								
Stream B-C	0.8	20.89	0.44	C	0.3	8.74	0.23	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.1	11.77	0.12	B	0.1	6.61	0.09	A

There are warnings associated with one or more model runs - see the 'Data Errors and Warnings' tables for each Analysis or Demand Set.

Values shown are the highest values encountered over all time segments. Delay is the maximum value of average delay per arriving vehicle.


## File summary

### File Description

Title	(untitled)
Location	
Site number	
Date	19/04/2018
Version	
Status	(new file)
Identifier	
Client	
Jobnumber	
Enumerator	PEGASUSGROUP\Philip.Wragg
Description	

## Units

Distance units	Speed units	Traffic units input	Traffic units results	Flow units	Average delay units	Total delay units	Rate of delay units
m	kph	Veh	PCU	perHour	s	-Min	perMin

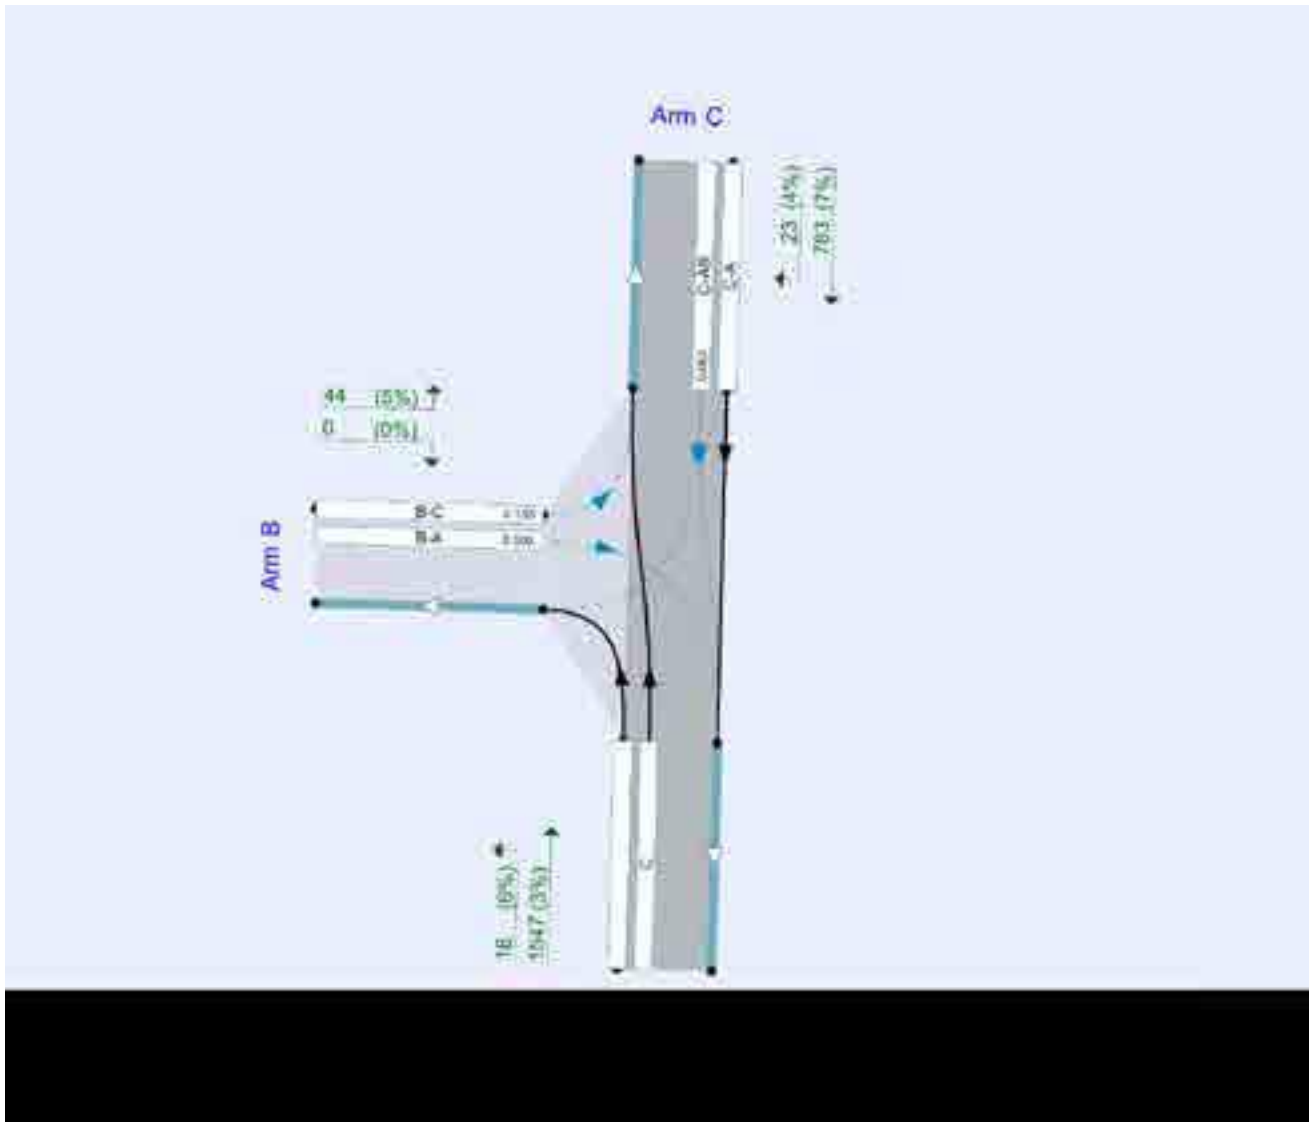

The junction diagram reflects the last run of Junctions.

**Analysis Options**

Vehicle length (m)	Calculate Queue Percentiles	Calculate detailed queueing delay	Calculate residual capacity	RFC Threshold	Average Delay threshold (s)	Queue threshold (PCU)
5.75	✓			0.85	36.00	20.00

### Demand Set Summary

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D1	2019 DS1 Base	AM	Flows from DS1 scenarios in Bypass TA	FLAT	07:45	09:15	90	15	✓
D2	2019 DS1 Base	PM	Flows from DS1 scenarios in Bypass TA	FLAT	16:45	18:15	90	15	✓
D3	2024 DS1 Base	AM	Base (no Stubbington bypass) to 2024 growth	FLAT	07:45	09:15	90	15	✓
D4	2024 DS1 Base	PM	Base (no Stubbington bypass) growth to 2024	FLAT	16:45	18:15	90	15	✓
D5	2024 DS1 Base + Dev	AM	Base (no Stubbington bypass) to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓
D6	2024 DS1 Base + Dev	PM	Base (no Stubbington bypass) growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓
D7	2019 DS2 Base	AM		FLAT	07:45	09:15	90	15	✓
D8	2019 DS2 Base	PM		FLAT	16:45	18:15	90	15	✓
D9	2024 DS2 Base	AM	Base to 2024 growth	FLAT	07:45	09:15	90	15	✓
D10	2024 DS2 Base	PM	Base growth to 2024	FLAT	16:45	18:15	90	15	✓
D11	2024 DS2 Base + Dev	AM	Base to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓
D12	2024 DS2 Base + Dev	PM	Base growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

### Analysis Set Details

ID	Include in report	Network flow scaling factor (%)	Network capacity scaling factor (%)
A1	✓	100.000	100.000

# 2019 DS1 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.34	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Arms

### Arms

Arm	Name	Description	Arm type
A	NGL South (South)		Major
B	Old NGL		Minor
C	NGL South (North)		Major

### Major Arm Geometry

Arm	Width of carriageway (m)	Has kerbed central reserve	Width of kerbed central reserve (m)	Has right turn bay	Width for right turn (m)	Visibility for right turn (m)	Blocks?	Blocking queue (PCU)
C	7.30	✓	4.00	✓	4.80	250.0	✓	10.00

Geometries for Arm C are measured opposite Arm B. Geometries for Arm A (if relevant) are measured opposite Arm D.

### Minor Arm Geometry

Arm	Minor arm type	Width at give-way (m)	Width at 5m (m)	Width at 10m (m)	Width at 15m (m)	Width at 20m (m)	Estimate flare length	Flare length (PCU)	Visibility to left (m)	Visibility to right (m)
B	One lane plus flare	10.00	9.50	6.30	5.35	5.10		3.00	94	75

## Slope / Intercept / Capacity

### Priority Intersection Slopes and Intercepts

Junction	Stream	Intercept (PCU/hr)	Slope for A-B	Slope for A-C	Slope for C-A	Slope for C-B
1	B-A	550	0.087	0.219	0.138	0.313
1	B-C	806	0.116	0.294	-	-
1	C-B	922	0.337	0.337	-	-

The slopes and intercepts shown above do NOT include any corrections or adjustments.

Streams may be combined, in which case capacity will be adjusted.

Values are shown for the first time segment only; they may differ for subsequent time segments.

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D1	2019 DS1 Base	AM	Flows from DS1 scenarios in Bypass TA	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1565	100.000
B		FLAT	✓	44	100.000
C		FLAT	✓	806	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	18	1547
	B	0	0	44
	C	783	23	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.00	0.00	1.00
	C	0.97	0.03	0.00

## Vehicle Mix

### Heavy Vehicle Percentages

	To			
	A	B	C	
From	A	0	6	3
	B	0	0	5
	C	7	4	0

### Average PCU Per Veh

	To			
	A	B	C	
From	A	1.000	1.056	1.030
	B	1.000	1.000	1.045
	C	1.065	1.043	1.000

## Detailed Demand Data

### Demand for each time segment

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1565	1612
	B	44	46
	C	806	858
08:00-08:15	A	1565	1612
	B	44	46
	C	806	858
08:15-08:30	A	1565	1612
	B	44	46
	C	806	858
08:30-08:45	A	1565	1612
	B	44	46
	C	806	858
08:45-09:00	A	1565	1612
	B	44	46
	C	806	858
09:00-09:15	A	1565	1612
	B	44	46
	C	806	858

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.14	13.06	0.2	~1	B	46	69
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.06	10.59	0.1	~1	B	24	36
C-A						834	1251
A-B						19	29
A-C						1593	2390

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	46	12	334	0.138	45	0.0	0.2	12.999	B
B-A	0	0	76	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	379	0.063	24	0.0	0.1	10.581	B
C-A	834	209			834				
A-B	19	5			19				
A-C	1593	398			1593				

**08:00 - 08:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	46	12	334	0.138	46	0.2	0.2	13.055	B
B-A	0	0	76	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	834	209			834				
A-B	19	5			19				
A-C	1593	398			1593				

**08:15 - 08:30**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	46	12	334	0.138	46	0.2	0.2	13.055	B
B-A	0	0	76	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	834	209			834				
A-B	19	5			19				
A-C	1593	398			1593				

**08:30 - 08:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	46	12	334	0.138	46	0.2	0.2	13.055	B
B-A	0	0	76	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	834	209			834				
A-B	19	5			19				
A-C	1593	398			1593				

**08:45 - 09:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	46	12	334	0.138	46	0.2	0.2	13.055	B
B-A	0	0	76	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	834	209			834				
A-B	19	5			19				
A-C	1593	398			1593				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	46	12	334	0.138	46	0.2	0.2	13.055	B
B-A	0	0	76	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	379	0.063	24	0.1	0.1	10.588	B
C-A	834	209			834				
A-B	19	5			19				
A-C	1593	398			1593				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.16	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.07	~1	~1	~1	~1			N/A	N/A



# 2019 DS1 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.22	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D2	2019 DS1 Base	PM	Flows from DS1 scenarios in Bypass TA	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	899	100.000
B		FLAT	✓	51	100.000
C		FLAT	✓	1348	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	17	882
B	0	0	51
C	1325	23	0

### Proportions

From	To		
	A	B	C
A	0.00	0.02	0.98
B	0.00	0.00	1.00
C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	899	907
	B	51	51
	C	1348	1360
17:00-17:15	A	899	907
	B	51	51
	C	1348	1360
17:15-17:30	A	899	907
	B	51	51
	C	1348	1360
17:30-17:45	A	899	907
	B	51	51
	C	1348	1360
17:45-18:00	A	899	907
	B	51	51
	C	1348	1360
18:00-18:15	A	899	907
	B	51	51
	C	1348	1360

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.09	7.34	0.1	~1	A	51	77
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.04	6.07	0.0	~1	A	23	35
C-A						1337	2005
A-B						17	26
A-C						890	1335

### Main Results for each time segment

#### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	541	0.094	51	0.0	0.1	7.327	A
B-A	0	0	162	0.000	0	0.0	0.0	0.000	A
C-AB	23	6	616	0.037	23	0.0	0.0	6.063	A
C-A	1337	334			1337				
A-B	17	4			17				
A-C	890	223			890				

#### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	541	0.094	51	0.1	0.1	7.338	A
B-A	0	0	162	0.000	0	0.0	0.0	0.000	A
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1337	334			1337				
A-B	17	4			17				
A-C	890	223			890				

#### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	541	0.094	51	0.1	0.1	7.338	A
B-A	0	0	162	0.000	0	0.0	0.0	0.000	A
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1337	334			1337				
A-B	17	4			17				
A-C	890	223			890				

#### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	541	0.094	51	0.1	0.1	7.338	A
B-A	0	0	162	0.000	0	0.0	0.0	0.000	A
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1337	334			1337				
A-B	17	4			17				
A-C	890	223			890				

#### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	541	0.094	51	0.1	0.1	7.338	A
B-A	0	0	162	0.000	0	0.0	0.0	0.000	A
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1337	334			1337				
A-B	17	4			17				
A-C	890	223			890				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	541	0.094	51	0.1	0.1	7.338	A
B-A	0	0	162	0.000	0	0.0	0.0	0.000	A
C-AB	23	6	616	0.037	23	0.0	0.0	6.066	A
C-A	1337	334			1337				
A-B	17	4			17				
A-C	890	223			890				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.10	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.10	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.10	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.10	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.10	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.10	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

# 2024 DS1 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.36	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D3	2024 DS1 Base	AM	Base (no Stubbington bypass) to 2024 growth	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1620	100.000
B		FLAT	✓	46	100.000
C		FLAT	✓	835	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	19	1602
	B	0	0	46
	C	811	24	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.00	0.00	1.00
	C	0.97	0.03	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

		To		
		A	B	C
From	A	0	6	3
	B	0	0	5
	C	7	4	0

**Average PCU Per Veh**

		To		
		A	B	C
From	A	1.000	1.056	1.030
	B	1.000	1.000	1.045
	C	1.065	1.043	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1620	1669
	B	46	48
	C	835	888
08:00-08:15	A	1620	1669
	B	46	48
	C	835	888
08:15-08:30	A	1620	1669
	B	46	48
	C	835	888
08:30-08:45	A	1620	1669
	B	46	48
	C	835	888
08:45-09:00	A	1620	1669
	B	46	48
	C	835	888
09:00-09:15	A	1620	1669
	B	46	48
	C	835	888

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.15	13.94	0.2	~1	B	48	71
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.07	11.22	0.1	~1	B	25	37
C-A						864	1295
A-B						20	30
A-C						1649	2474

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	318	0.150	47	0.0	0.2	13.870	B
B-A	0	0	60	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	360	0.069	25	0.0	0.1	11.203	B
C-A	864	216			864				
A-B	20	5			20				
A-C	1649	412			1649				

#### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	318	0.150	48	0.2	0.2	13.941	B
B-A	0	0	60	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	864	216			864				
A-B	20	5			20				
A-C	1649	412			1649				

#### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	318	0.150	48	0.2	0.2	13.941	B
B-A	0	0	60	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	864	216			864				
A-B	20	5			20				
A-C	1649	412			1649				

#### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	318	0.150	48	0.2	0.2	13.941	B
B-A	0	0	60	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	864	216			864				
A-B	20	5			20				
A-C	1649	412			1649				

#### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	318	0.150	48	0.2	0.2	13.941	B
B-A	0	0	60	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	864	216			864				
A-B	20	5			20				
A-C	1649	412			1649				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	48	12	318	0.150	48	0.2	0.2	13.941	B
B-A	0	0	60	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	360	0.069	25	0.1	0.1	11.223	B
C-A	864	216			864				
A-B	20	5			20				
A-C	1649	412			1649				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.18	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.18	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.18	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.18	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.18	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.18	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A



# 2024 DS1 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.23	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D4	2024 DS1 Base	PM	Base (no Stubbington bypass) growth to 2024	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	932	100.000
B		FLAT	✓	53	100.000
C		FLAT	✓	1398	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	18	914
B	0	0	53
C	1374	24	0

### Proportions

From	To		
	A	B	C
A	0.00	0.02	0.98
B	0.00	0.00	1.00
C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To		
	A	B	C
A	0	0	1
B	0	0	0
C	1	0	0

**Average PCU Per Veh**

From	To		
	A	B	C
A	1.000	1.000	1.009
B	1.000	1.000	1.000
C	1.009	1.000	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	932	940
	B	53	53
	C	1398	1410
17:00-17:15	A	932	940
	B	53	53
	C	1398	1410
17:15-17:30	A	932	940
	B	53	53
	C	1398	1410
17:30-17:45	A	932	940
	B	53	53
	C	1398	1410
17:45-18:00	A	932	940
	B	53	53
	C	1398	1410
18:00-18:15	A	932	940
	B	53	53
	C	1398	1410

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.10	7.51	0.1	~1	A	53	79
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.04	6.19	0.0	~1	A	24	36
C-A						1386	2079
A-B						18	26
A-C						922	1384

## Main Results for each time segment

### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	532	0.099	52	0.0	0.1	7.503	A
B-A	0	0	148	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	605	0.039	24	0.0	0.0	6.188	A
C-A	1386	346			1386				
A-B	18	4			18				
A-C	922	231			922				

### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	532	0.099	53	0.1	0.1	7.514	A
B-A	0	0	147	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	605	0.039	24	0.0	0.0	6.191	A
C-A	1386	346			1386				
A-B	18	4			18				
A-C	922	231			922				

### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	532	0.099	53	0.1	0.1	7.514	A
B-A	0	0	147	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	605	0.039	24	0.0	0.0	6.191	A
C-A	1386	346			1386				
A-B	18	4			18				
A-C	922	231			922				

### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	532	0.099	53	0.1	0.1	7.514	A
B-A	0	0	147	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	605	0.039	24	0.0	0.0	6.191	A
C-A	1386	346			1386				
A-B	18	4			18				
A-C	922	231			922				

### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	532	0.099	53	0.1	0.1	7.514	A
B-A	0	0	147	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	605	0.039	24	0.0	0.0	6.191	A
C-A	1386	346			1386				
A-B	18	4			18				
A-C	922	231			922				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	53	13	532	0.099	53	0.1	0.1	7.514	A
B-A	0	0	147	0.000	0	0.0	0.0	0.000	A
C-AB	24	6	605	0.039	24	0.0	0.0	6.191	A
C-A	1386	346			1386				
A-B	18	4			18				
A-C	922	231			922				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.11	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

# 2024 DS1 Base + Dev, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		1.09	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D5	2024 DS1 Base + Dev	AM	Base (no Stubbington bypass) to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1631	100.000
B		FLAT	✓	126	100.000
C		FLAT	✓	910	100.000

## Origin-Destination Data

#### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	29	1602
	B	0	0	126
	C	864	46	0

#### Proportions

	To			
	A	B	C	
From	A	0.00	0.02	0.98
	B	0.00	0.00	1.00
	C	0.95	0.05	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

		To		
		A	B	C
From	A	0	4	3
	B	0	0	2
	C	6	2	0

**Average PCU Per Veh**

		To		
		A	B	C
From	A	1.000	1.035	1.030
	B	1.000	1.000	1.016
	C	1.061	1.023	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1631	1680
	B	126	128
	C	910	964
08:00-08:15	A	1631	1680
	B	126	128
	C	910	964
08:15-08:30	A	1631	1680
	B	126	128
	C	910	964
08:30-08:45	A	1631	1680
	B	126	128
	C	910	964
08:45-09:00	A	1631	1680
	B	126	128
	C	910	964
09:00-09:15	A	1631	1680
	B	126	128
	C	910	964

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.40	19.39	0.7	~1	C	128	191
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.13	11.92	0.2	~1	B	47	70
C-A						917	1376
A-B						31	46
A-C						1649	2474

## Main Results for each time segment

### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	128	32	316	0.403	125	0.0	0.7	18.880	C
B-A	0	0	44	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	356	0.132	46	0.0	0.2	11.876	B
C-A	917	229			917				
A-B	31	8			31				
A-C	1649	412			1649				

### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	128	32	316	0.403	128	0.7	0.7	19.376	C
B-A	0	0	44	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	917	229			917				
A-B	31	8			31				
A-C	1649	412			1649				

### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	128	32	316	0.403	128	0.7	0.7	19.386	C
B-A	0	0	44	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	917	229			917				
A-B	31	8			31				
A-C	1649	412			1649				

### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	128	32	316	0.403	128	0.7	0.7	19.388	C
B-A	0	0	44	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	917	229			917				
A-B	31	8			31				
A-C	1649	412			1649				

### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	128	32	316	0.403	128	0.7	0.7	19.390	C
B-A	0	0	44	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	917	229			917				
A-B	31	8			31				
A-C	1649	412			1649				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	128	32	316	0.403	128	0.7	0.7	19.389	C
B-A	0	0	44	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	356	0.132	47	0.2	0.2	11.917	B
C-A	917	229			917				
A-B	31	8			31				
A-C	1649	412			1649				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.66	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.15	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.68	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.15	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.68	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.15	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.68	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.15	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.68	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.16	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.68	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.16	~1	~1	~1	~1			N/A	N/A



# 2024 DS1 Base + Dev, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.48	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D6	2024 DS1 Base + Dev	PM	Base (no Stubbington bypass) growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	978	100.000
B		FLAT	✓	102	100.000
C		FLAT	✓	1449	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	63	914
B	0	0	102
C	1394	55	0

### Proportions

From	To		
	A	B	C
A	0.00	0.06	0.94
B	0.00	0.00	1.00
C	0.96	0.04	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	978	986
	B	102	102
	C	1449	1461
17:00-17:15	A	978	986
	B	102	102
	C	1449	1461
17:15-17:30	A	978	986
	B	102	102
	C	1449	1461
17:30-17:45	A	978	986
	B	102	102
	C	1449	1461
17:45-18:00	A	978	986
	B	102	102
	C	1449	1461
18:00-18:15	A	978	986
	B	102	102
	C	1449	1461

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.19	8.48	0.2	~1	A	102	153
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.09	6.73	0.1	~1	A	55	83
C-A						1406	2109
A-B						63	95
A-C						923	1384

### Main Results for each time segment

#### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	102	25	526	0.194	101	0.0	0.2	8.442	A
B-A	0	0	131	0.000	0	0.0	0.0	0.000	A
C-AB	55	14	590	0.093	55	0.0	0.1	6.724	A
C-A	1406	352			1406				
A-B	63	16			63				
A-C	923	231			923				

#### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	102	25	526	0.194	102	0.2	0.2	8.479	A
B-A	0	0	131	0.000	0	0.0	0.0	0.000	A
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1406	352			1406				
A-B	63	16			63				
A-C	923	231			923				

#### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	102	25	526	0.194	102	0.2	0.2	8.479	A
B-A	0	0	131	0.000	0	0.0	0.0	0.000	A
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1406	352			1406				
A-B	63	16			63				
A-C	923	231			923				

#### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	102	25	526	0.194	102	0.2	0.2	8.479	A
B-A	0	0	131	0.000	0	0.0	0.0	0.000	A
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1406	352			1406				
A-B	63	16			63				
A-C	923	231			923				

#### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	102	25	526	0.194	102	0.2	0.2	8.479	A
B-A	0	0	131	0.000	0	0.0	0.0	0.000	A
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1406	352			1406				
A-B	63	16			63				
A-C	923	231			923				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	102	25	526	0.194	102	0.2	0.2	8.479	A
B-A	0	0	131	0.000	0	0.0	0.0	0.000	A
C-AB	55	14	590	0.093	55	0.1	0.1	6.732	A
C-A	1406	352			1406				
A-B	63	16			63				
A-C	923	231			923				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.10	~1	~1	~1	~1			N/A	N/A

# 2019 DS2 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.44	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D7	2019 DS2 Base	AM	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1571	100.000
B		FLAT	✓	55	100.000
C		FLAT	✓	539	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	22	1549
	B	0	0	55
	C	520	19	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.00	0.00	1.00
	C	0.96	0.04	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

		To		
		A	B	C
From	A	0	6	3
	B	0	0	5
	C	7	4	0

**Average PCU Per Veh**

		To		
		A	B	C
From	A	1.000	1.056	1.030
	B	1.000	1.000	1.045
	C	1.065	1.043	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1571	1618
	B	55	58
	C	539	574
08:00-08:15	A	1571	1618
	B	55	58
	C	539	574
08:15-08:30	A	1571	1618
	B	55	58
	C	539	574
08:30-08:45	A	1571	1618
	B	55	58
	C	539	574
08:45-09:00	A	1571	1618
	B	55	58
	C	539	574
09:00-09:15	A	1571	1618
	B	55	58
	C	539	574

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.17	13.67	0.2	~1	B	58	87
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.05	10.52	0.1	~1	B	20	30
C-A						554	831
A-B						23	35
A-C						1595	2392

## Main Results for each time segment

### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	58	14	333	0.174	57	0.0	0.2	13.586	B
B-A	0	0	116	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	377	0.053	20	0.0	0.1	10.512	B
C-A	554	138			554				
A-B	23	6			23				
A-C	1595	399			1595				

### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	58	14	333	0.174	58	0.2	0.2	13.669	B
B-A	0	0	116	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	554	138			554				
A-B	23	6			23				
A-C	1595	399			1595				

### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	58	14	333	0.174	58	0.2	0.2	13.669	B
B-A	0	0	116	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	554	138			554				
A-B	23	6			23				
A-C	1595	399			1595				

### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	58	14	333	0.174	58	0.2	0.2	13.669	B
B-A	0	0	116	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	554	138			554				
A-B	23	6			23				
A-C	1595	399			1595				

### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	58	14	333	0.174	58	0.2	0.2	13.669	B
B-A	0	0	116	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	554	138			554				
A-B	23	6			23				
A-C	1595	399			1595				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	58	14	333	0.174	58	0.2	0.2	13.669	B
B-A	0	0	116	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	377	0.053	20	0.1	0.1	10.525	B
C-A	554	138			554				
A-B	23	6			23				
A-C	1595	399			1595				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.22	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.22	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.22	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.22	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.22	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.22	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A



# 2019 DS2 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.35	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D8	2019 DS2 Base	PM	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	883	100.000
B		FLAT	✓	69	100.000
C		FLAT	✓	826	100.000

## Origin-Destination Data

#### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	23	860
	B	0	0	69
	C	807	19	0

#### Proportions

	To			
	A	B	C	
From	A	0.00	0.03	0.97
	B	0.00	0.00	1.00
	C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	883	891
	B	69	69
	C	826	833
17:00-17:15	A	883	891
	B	69	69
	C	826	833
17:15-17:30	A	883	891
	B	69	69
	C	826	833
17:30-17:45	A	883	891
	B	69	69
	C	826	833
17:45-18:00	A	883	891
	B	69	69
	C	826	833
18:00-18:15	A	883	891
	B	69	69
	C	826	833

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.13	7.53	0.1	~1	A	69	104
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.03	5.97	0.0	~1	A	19	29
C-A						814	1221
A-B						23	34
A-C						868	1302

## Main Results for each time segment

### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	69	17	547	0.126	68	0.0	0.1	7.507	A
B-A	0	0	239	0.000	0	0.0	0.0	0.000	A
C-AB	19	5	622	0.031	19	0.0	0.0	5.971	A
C-A	814	203			814				
A-B	23	6			23				
A-C	868	217			868				

### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	69	17	547	0.126	69	0.1	0.1	7.526	A
B-A	0	0	239	0.000	0	0.0	0.0	0.000	A
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	814	203			814				
A-B	23	6			23				
A-C	868	217			868				

### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	69	17	547	0.126	69	0.1	0.1	7.526	A
B-A	0	0	239	0.000	0	0.0	0.0	0.000	A
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	814	203			814				
A-B	23	6			23				
A-C	868	217			868				

### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	69	17	547	0.126	69	0.1	0.1	7.526	A
B-A	0	0	239	0.000	0	0.0	0.0	0.000	A
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	814	203			814				
A-B	23	6			23				
A-C	868	217			868				

### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	69	17	547	0.126	69	0.1	0.1	7.526	A
B-A	0	0	239	0.000	0	0.0	0.0	0.000	A
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	814	203			814				
A-B	23	6			23				
A-C	868	217			868				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	69	17	547	0.126	69	0.1	0.1	7.526	A
B-A	0	0	239	0.000	0	0.0	0.0	0.000	A
C-AB	19	5	622	0.031	19	0.0	0.0	5.973	A
C-A	814	203			814				
A-B	23	6			23				
A-C	868	217			868				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.14	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

# 2024 DS2 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.48	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D9	2024 DS2 Base	AM	Base to 2024 growth	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1626	100.000
B		FLAT	✓	57	100.000
C		FLAT	✓	558	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	23	1604
B	0	0	57
C	539	20	0

### Proportions

From	To		
	A	B	C
A	0.00	0.01	0.99
B	0.00	0.00	1.00
C	0.96	0.04	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

		To		
		A	B	C
From	A	0	6	3
	B	0	0	5
	C	7	4	0

**Average PCU Per Veh**

		To		
		A	B	C
From	A	1.000	1.056	1.030
	B	1.000	1.000	1.045
	C	1.065	1.043	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1626	1675
	B	57	60
	C	558	594
08:00-08:15	A	1626	1675
	B	57	60
	C	558	594
08:15-08:30	A	1626	1675
	B	57	60
	C	558	594
08:30-08:45	A	1626	1675
	B	57	60
	C	558	594
08:45-09:00	A	1626	1675
	B	57	60
	C	558	594
09:00-09:15	A	1626	1675
	B	57	60
	C	558	594

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.19	14.67	0.2	~1	B	60	90
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.06	11.15	0.1	~1	B	21	31
C-A						574	860
A-B						24	36
A-C						1651	2477

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	60	15	317	0.189	59	0.0	0.2	14.563	B
B-A	0	0	100	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	357	0.058	20	0.0	0.1	11.134	B
C-A	574	143			574				
A-B	24	6			24				
A-C	1651	413			1651				

#### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	60	15	317	0.189	60	0.2	0.2	14.669	B
B-A	0	0	100	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	574	143			574				
A-B	24	6			24				
A-C	1651	413			1651				

#### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	60	15	317	0.189	60	0.2	0.2	14.669	B
B-A	0	0	100	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	574	143			574				
A-B	24	6			24				
A-C	1651	413			1651				

#### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	60	15	317	0.189	60	0.2	0.2	14.669	B
B-A	0	0	100	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	574	143			574				
A-B	24	6			24				
A-C	1651	413			1651				

#### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	60	15	317	0.189	60	0.2	0.2	14.669	B
B-A	0	0	100	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	574	143			574				
A-B	24	6			24				
A-C	1651	413			1651				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	60	15	317	0.189	60	0.2	0.2	14.669	B
B-A	0	0	100	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	357	0.058	21	0.1	0.1	11.150	B
C-A	574	143			574				
A-B	24	6			24				
A-C	1651	413			1651				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.24	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.06	~1	~1	~1	~1			N/A	N/A



# 2024 DS2 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.36	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D10	2024 DS2 Base	PM	Base growth to 2024	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	916	100.000
B		FLAT	✓	72	100.000
C		FLAT	✓	856	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	24	892
	B	0	0	72
	C	836	20	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.03	0.97
	B	0.00	0.00	1.00
	C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To		
	A	B	C
A	0	0	1
B	0	0	0
C	1	0	0

**Average PCU Per Veh**

From	To		
	A	B	C
A	1.000	1.000	1.009
B	1.000	1.000	1.000
C	1.009	1.000	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	916	924
	B	72	72
	C	856	864
17:00-17:15	A	916	924
	B	72	72
	C	856	864
17:15-17:30	A	916	924
	B	72	72
	C	856	864
17:30-17:45	A	916	924
	B	72	72
	C	856	864
17:45-18:00	A	916	924
	B	72	72
	C	856	864
18:00-18:15	A	916	924
	B	72	72
	C	856	864

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.13	7.72	0.2	~1	A	72	107
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.03	6.09	0.0	~1	A	20	30
C-A						844	1266
A-B						24	35
A-C						900	1350

## Main Results for each time segment

### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	72	18	538	0.133	71	0.0	0.2	7.702	A
B-A	0	0	228	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	611	0.033	20	0.0	0.0	6.090	A
C-A	844	211			844				
A-B	24	6			24				
A-C	900	225			900				

### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	72	18	538	0.133	72	0.2	0.2	7.721	A
B-A	0	0	228	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	844	211			844				
A-B	24	6			24				
A-C	900	225			900				

### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	72	18	538	0.133	72	0.2	0.2	7.721	A
B-A	0	0	228	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	844	211			844				
A-B	24	6			24				
A-C	900	225			900				

### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	72	18	538	0.133	72	0.2	0.2	7.721	A
B-A	0	0	228	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	844	211			844				
A-B	24	6			24				
A-C	900	225			900				

### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	72	18	538	0.133	72	0.2	0.2	7.721	A
B-A	0	0	228	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	844	211			844				
A-B	24	6			24				
A-C	900	225			900				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	72	18	538	0.133	72	0.2	0.2	7.721	A
B-A	0	0	228	0.000	0	0.0	0.0	0.000	A
C-AB	20	5	611	0.033	20	0.0	0.0	6.092	A
C-A	844	211			844				
A-B	24	6			24				
A-C	900	225			900				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.15	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.03	~1	~1	~1	~1			N/A	N/A

# 2024 DS2 Base + Dev, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		1.37	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D11	2024 DS2 Base + Dev	AM	Base to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1634	100.000
B		FLAT	✓	137	100.000
C		FLAT	✓	641	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	31	1604
	B	0	0	137
	C	599	42	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.02	0.98
	B	0.00	0.00	1.00
	C	0.93	0.07	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To		
	A	B	C
A	0	4	3
B	0	0	2
C	6	2	0

**Average PCU Per Veh**

From	To		
	A	B	C
A	1.000	1.041	1.030
B	1.000	1.000	1.019
C	1.059	1.020	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1634	1683
	B	137	140
	C	641	677
08:00-08:15	A	1634	1683
	B	137	140
	C	641	677
08:15-08:30	A	1634	1683
	B	137	140
	C	641	677
08:30-08:45	A	1634	1683
	B	137	140
	C	641	677
08:45-09:00	A	1634	1683
	B	137	140
	C	641	677
09:00-09:15	A	1634	1683
	B	137	140
	C	641	677

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.44	20.89	0.8	~1	C	140	210
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.12	11.77	0.1	~1	B	43	64
C-A						634	951
A-B						32	48
A-C						1651	2477

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	140	35	316	0.444	137	0.0	0.8	20.198	C
B-A	0	0	84	0.000	0	0.0	0.0	0.000	A
C-AB	43	11	355	0.120	42	0.0	0.1	11.734	B
C-A	634	158			634				
A-B	32	8			32				
A-C	1651	413			1651				

#### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	140	35	316	0.444	140	0.8	0.8	20.863	C
B-A	0	0	84	0.000	0	0.0	0.0	0.000	A
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	634	158			634				
A-B	32	8			32				
A-C	1651	413			1651				

#### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	140	35	316	0.444	140	0.8	0.8	20.875	C
B-A	0	0	84	0.000	0	0.0	0.0	0.000	A
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	634	158			634				
A-B	32	8			32				
A-C	1651	413			1651				

#### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	140	35	316	0.444	140	0.8	0.8	20.881	C
B-A	0	0	84	0.000	0	0.0	0.0	0.000	A
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	634	158			634				
A-B	32	8			32				
A-C	1651	413			1651				

#### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	140	35	316	0.444	140	0.8	0.8	20.883	C
B-A	0	0	84	0.000	0	0.0	0.0	0.000	A
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	634	158			634				
A-B	32	8			32				
A-C	1651	413			1651				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	140	35	316	0.444	140	0.8	0.8	20.885	C
B-A	0	0	84	0.000	0	0.0	0.0	0.000	A
C-AB	43	11	355	0.120	43	0.1	0.1	11.773	B
C-A	634	158			634				
A-B	32	8			32				
A-C	1651	413			1651				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.78	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.80	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.80	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.80	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.81	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.81	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.14	~1	~1	~1	~1			N/A	N/A



# 2024 DS2 Base + Dev, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.69	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D12	2024 DS2 Base + Dev	PM	Base growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	961	100.000
B		FLAT	✓	121	100.000
C		FLAT	✓	907	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	69	892
	B	0	0	121
	C	856	51	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.07	0.93
	B	0.00	0.00	1.00
	C	0.94	0.06	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	961	970
	B	121	121
	C	907	915
17:00-17:15	A	961	970
	B	121	121
	C	907	915
17:15-17:30	A	961	970
	B	121	121
	C	907	915
17:30-17:45	A	961	970
	B	121	121
	C	907	915
17:45-18:00	A	961	970
	B	121	121
	C	907	915
18:00-18:15	A	961	970
	B	121	121
	C	907	915

## Results

**Results Summary for whole modelled period**

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.23	8.74	0.3	~1	A	121	181
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.09	6.61	0.1	~1	A	51	77
C-A						864	1296
A-B						69	104
A-C						900	1350

## Main Results for each time segment

### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	121	30	532	0.226	119	0.0	0.3	8.692	A
B-A	0	0	211	0.000	0	0.0	0.0	0.000	A
C-AB	51	13	595	0.086	51	0.0	0.1	6.607	A
C-A	864	216			864				
A-B	69	17			69				
A-C	900	225			900				

### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	121	30	532	0.226	121	0.3	0.3	8.740	A
B-A	0	0	211	0.000	0	0.0	0.0	0.000	A
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	864	216			864				
A-B	69	17			69				
A-C	900	225			900				

### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	121	30	532	0.226	121	0.3	0.3	8.740	A
B-A	0	0	211	0.000	0	0.0	0.0	0.000	A
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	864	216			864				
A-B	69	17			69				
A-C	900	225			900				

### 17:30 - 17:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	121	30	532	0.226	121	0.3	0.3	8.740	A
B-A	0	0	211	0.000	0	0.0	0.0	0.000	A
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	864	216			864				
A-B	69	17			69				
A-C	900	225			900				

### 17:45 - 18:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	121	30	532	0.226	121	0.3	0.3	8.740	A
B-A	0	0	211	0.000	0	0.0	0.0	0.000	A
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	864	216			864				
A-B	69	17			69				
A-C	900	225			900				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	121	30	532	0.226	121	0.3	0.3	8.740	A
B-A	0	0	211	0.000	0	0.0	0.0	0.000	A
C-AB	51	13	595	0.086	51	0.1	0.1	6.614	A
C-A	864	216			864				
A-B	69	17			69				
A-C	900	225			900				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.29	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.29	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.29	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.29	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.29	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.29	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

# Junctions 9

## ARCADY 9 - Roundabout Module

Version: 9.5.0.6896  
© Copyright TRL Limited, 2018

For sales and distribution information, program advice and maintenance, contact TRL:  
+44 (0)1344 379777 software@trl.co.uk www.trlsoftware.co.uk

**The users of this computer program for the solution of an engineering problem are in no way relieved of their responsibility for the correctness of the solution**

**Filename:** Old Newgate Ln NGLS RBT.j9

**Path:** \\Pg-brs-dc01\data\Bristol Projects\Bristol - Live Projects\BRS.4901 - BRS.5000\BRS.4989 - SUSTAINABLE LAND PLC - LAND TO THE NORTH OF GOSPORT ROAD, FAREHAM\Transport\7. Junction Modelling\b. PICADY\19

**Report generation date:** 26/02/2019 14:02:05

- 
- »2019 DS1 Base, AM
  - »2019 DS1 Base, PM
  - »2024 DS1 Base, AM
  - »2024 DS1 Base, PM
  - »2024 DS1 Base + Dev, AM
  - »2024 DS1 Base + Dev, PM
  - »2019 DS2 Base, AM
  - »2019 DS2 Base, PM
  - »2024 DS2 Base, AM
  - »2024 DS2 Base, PM
  - »2024 DS2 Base + Dev, AM
  - »2024 DS2 Base + Dev, PM

## Summary of junction performance

	AM				PM			
	Queue (PCU)	Delay (s)	RFC	LOS	Queue (PCU)	Delay (s)	RFC	LOS
<b>2019 DS1 Base</b>								
Arm A	574.1	1543.10	1.31	F	2.8	11.17	0.74	B
Arm B	0.1	6.59	0.07	A	0.1	4.87	0.06	A
Arm C	1.7	7.17	0.61	A	25.5	71.76	0.97	F
<b>2024 DS1 Base</b>								
Arm A	659.9	1773.55	1.36	F	3.2	12.45	0.76	B
Arm B	0.1	6.61	0.08	A	0.1	5.00	0.07	A
Arm C	1.8	7.59	0.63	A	57.3	150.21	1.01	F
<b>2024 DS1 Base + Dev</b>								
Arm A	693.6	1881.53	1.38	F	4.3	15.74	0.81	C
Arm B	0.3	7.32	0.20	A	0.2	5.37	0.13	A
Arm C	2.1	8.45	0.66	A	104.6	264.64	1.04	F
<b>2019 DS2 Base</b>								
Arm A	579.7	1555.44	1.31	F	2.6	10.58	0.72	B
Arm B	0.1	6.66	0.08	A	0.1	4.82	0.07	A
Arm C	0.7	4.71	0.41	A	1.5	6.56	0.60	A
<b>2024 DS2 Base</b>								
Arm A	665.8	1785.95	1.36	F	3.0	11.71	0.75	B
Arm B	0.1	6.68	0.08	A	0.1	4.94	0.07	A
Arm C	0.8	4.83	0.42	A	1.6	6.94	0.62	A
<b>2024 DS2 Base + Dev</b>								
Arm A	695.3	1882.76	1.38	F	3.9	14.64	0.80	B
Arm B	0.3	7.46	0.21	A	0.2	5.30	0.13	A
Arm C	0.9	5.19	0.45	A	1.8	7.55	0.65	A

There are warnings associated with one or more model runs - see the 'Data Errors and Warnings' tables for each Analysis or Demand Set.

Values shown are the highest values encountered over all time segments. Delay is the maximum value of average delay per arriving vehicle.


## File summary

### File Description

Title	(untitled)
Location	
Site number	
Date	19/04/2018
Version	
Status	(new file)
Identifier	
Client	
Jobnumber	
Enumerator	PEGASUSGROUP\Philip.Wragg
Description	

## Units

Distance units	Speed units	Traffic units input	Traffic units results	Flow units	Average delay units	Total delay units	Rate of delay units
m	kph	Veh	PCU	perHour	s	-Min	perMin

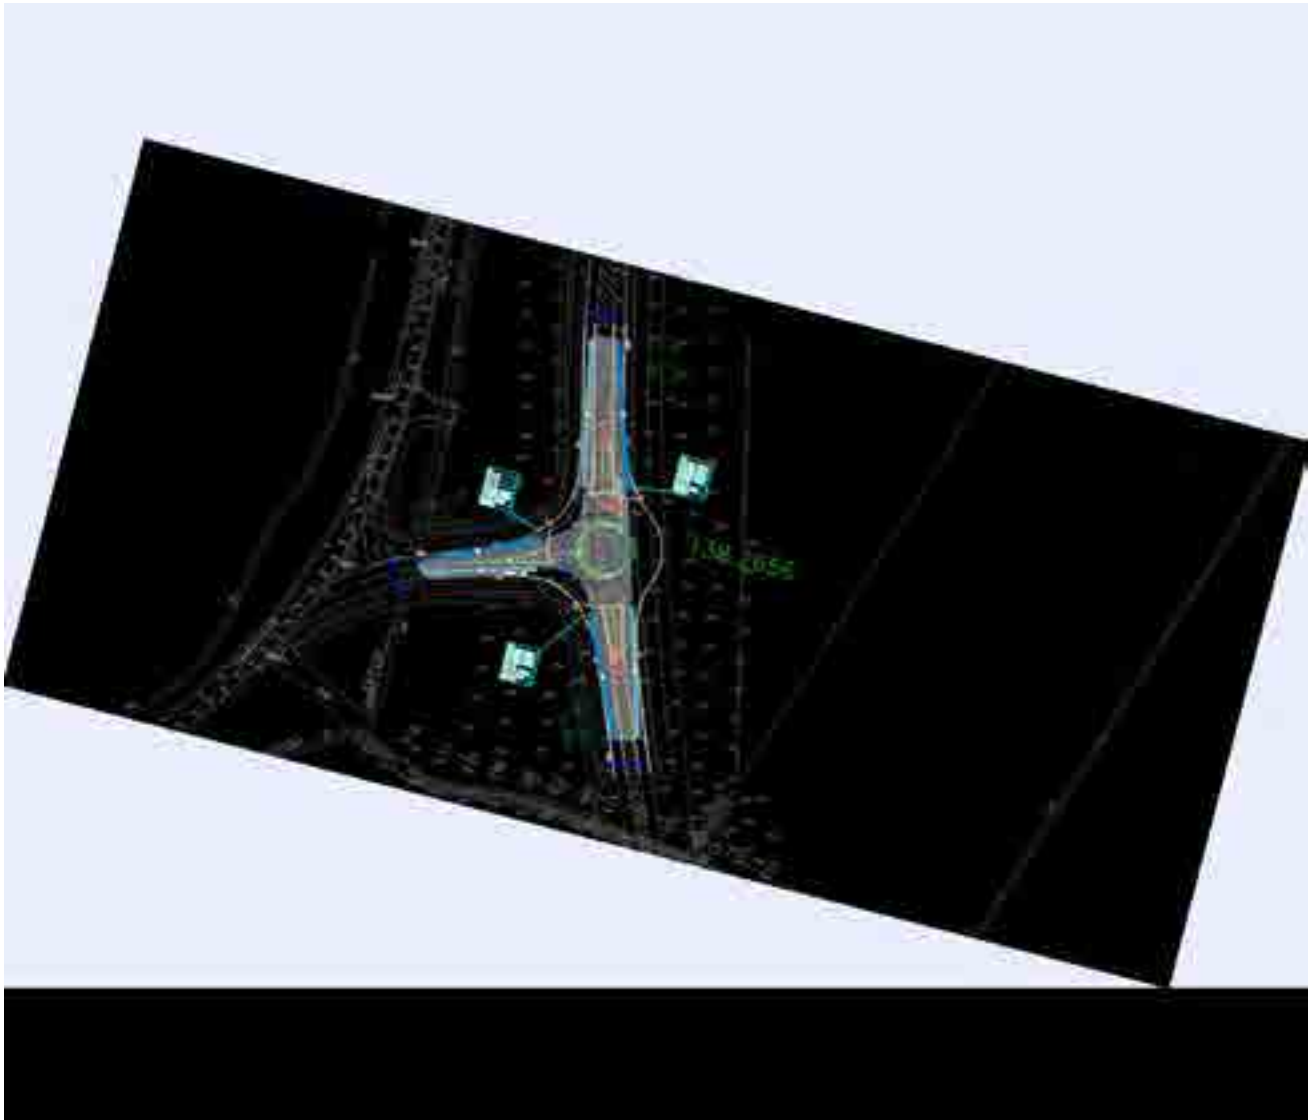

*The junction diagram reflects the last run of Junctions.*

**Analysis Options**

Vehicle length (m)	Calculate Queue Percentiles	Calculate detailed queueing delay	Calculate residual capacity	RFC Threshold	Average Delay threshold (s)	Queue threshold (PCU)
5.75	✓			0.85	36.00	20.00

### Demand Set Summary

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D1	2019 DS1 Base	AM	Flows from DS1 scenarios in Bypass TA	FLAT	07:45	09:15	90	15	✓
D2	2019 DS1 Base	PM	Flows from DS1 scenarios in Bypass TA	FLAT	16:45	18:15	90	15	✓
D3	2024 DS1 Base	AM	Base (no Stubbington bypass) to 2024 growth	FLAT	07:45	09:15	90	15	✓
D4	2024 DS1 Base	PM	Base (no Stubbington bypass) growth to 2024	FLAT	16:45	18:15	90	15	✓
D5	2024 DS1 Base + Dev	AM	Base (no Stubbington bypass) to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓
D6	2024 DS1 Base + Dev	PM	Base (no Stubbington bypass) growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓
D7	2019 DS2 Base	AM		FLAT	07:45	09:15	90	15	✓
D8	2019 DS2 Base	PM		FLAT	16:45	18:15	90	15	✓
D9	2024 DS2 Base	AM	Base to 2024 growth	FLAT	07:45	09:15	90	15	✓
D10	2024 DS2 Base	PM	Base growth to 2024	FLAT	16:45	18:15	90	15	✓
D11	2024 DS2 Base + Dev	AM	Base to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓
D12	2024 DS2 Base + Dev	PM	Base growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

### Analysis Set Details

ID	Include in report	Network flow scaling factor (%)	Network capacity scaling factor (%)
A1	✓	100.000	100.000



# 2019 DS1 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	1001.11	F

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Arms

### Arms

Arm	Name	Description
A	NGL South (South)	
B	Old NGL	
C	NGL South (North)	

### Roundabout Geometry

Arm	V - Approach road half-width (m)	E - Entry width (m)	I' - Effective flare length (m)	R - Entry radius (m)	D - Inscribed circle diameter (m)	PHI - Conflict (entry) angle (deg)	Exit only
A	3.64	6.04	4.7	5.6	35.3	22.6	
B	3.68	5.81	5.9	5.6	35.3	25.8	
C	3.79	6.23	7.5	5.6	35.2	18.7	

### Slope / Intercept / Capacity

#### Roundabout Slope and Intercept used in model

Arm	Final slope	Final intercept (PCU/hr)
A	0.528	1244
B	0.528	1260
C	0.561	1383

The slope and intercept shown above include any corrections and adjustments.

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D1	2019 DS1 Base	AM	Flows from DS1 scenarios in Bypass TA	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1565	100.000
B		FLAT	✓	44	100.000
C		FLAT	✓	781	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	18	1547
	B	25	0	19
	C	758	23	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.57	0.00	0.43
	C	0.97	0.03	0.00

## Vehicle Mix

### Heavy Vehicle Percentages

	To			
	A	B	C	
From	A	0	6	3
	B	0	0	11
	C	7	4	0

### Average PCU Per Veh

	To			
	A	B	C	
From	A	1.000	1.056	1.030
	B	1.000	1.000	1.105
	C	1.067	1.043	1.000

## Detailed Demand Data

### Demand for each time segment

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1565	1612
	B	44	46
	C	781	833
08:00-08:15	A	1565	1612
	B	44	46
	C	781	833
08:15-08:30	A	1565	1612
	B	44	46
	C	781	833
08:30-08:45	A	1565	1612
	B	44	46
	C	781	833
08:45-09:00	A	1565	1612
	B	44	46
	C	781	833
09:00-09:15	A	1565	1612
	B	44	46
	C	781	833

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	1.31	1543.10	574.1	?	F	1612	2418
B	0.07	6.59	0.1	~1	A	46	69
C	0.61	7.17	1.7	?	A	833	1249

### Main Results for each time segment

#### 07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1612	403	24	1232	1.309	1219	828	0.0	98.3	150.997	F
B	46	12	1204	624	0.074	46	38	0.0	0.1	6.509	A
C	833	208	25	1369	0.609	826	1225	0.0	1.6	6.999	A

#### 08:00 - 08:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1612	403	24	1231	1.309	1231	834	98.3	193.5	432.576	F
B	46	12	1217	617	0.075	46	39	0.1	0.1	6.587	A
C	833	208	25	1369	0.609	833	1238	1.6	1.6	7.163	A

#### 08:15 - 08:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1612	403	24	1231	1.309	1231	834	193.5	288.7	709.666	F
B	46	12	1217	617	0.075	46	39	0.1	0.1	6.589	A
C	833	208	25	1369	0.609	833	1238	1.6	1.6	7.165	A

#### 08:30 - 08:45

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1612	403	24	1231	1.309	1231	834	288.7	383.8	987.312	F
B	46	12	1217	617	0.075	46	39	0.1	0.1	6.589	A
C	833	208	25	1369	0.609	833	1238	1.6	1.6	7.165	A

#### 08:45 - 09:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1612	403	24	1231	1.309	1231	834	383.8	479.0	1265.160	F
B	46	12	1217	617	0.075	46	39	0.1	0.1	6.589	A
C	833	208	25	1369	0.609	833	1238	1.6	1.7	7.165	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1612	403	24	1231	1.309	1231	834	479.0	574.1	1543.103	F
B	46	12	1217	617	0.075	46	39	0.1	0.1	6.589	A
C	833	208	25	1369	0.609	833	1238	1.7	1.7	7.165	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	98.30	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.63	?	?	?	?			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	193.51	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.64	?	?	?	?			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	288.66	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.65	?	?	?	?			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	383.81	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.65	?	?	?	?			N/A	N/A

**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	478.95	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.65	?	?	?	?			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	574.09	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.65	?	?	?	?			N/A	N/A

# 2019 DS1 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	46.27	E

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D2	2019 DS1 Base	PM	Flows from DS1 scenarios in Bypass TA	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	899	100.000
B		FLAT	✓	51	100.000
C		FLAT	✓	1320	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	17	882
B	28	0	23
C	1297	23	0

### Proportions

From	To		
	A	B	C
A	0.00	0.02	0.98
B	0.55	0.00	0.45
C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	899	907
	B	51	51
	C	1320	1332
17:00-17:15	A	899	907
	B	51	51
	C	1320	1332
17:15-17:30	A	899	907
	B	51	51
	C	1320	1332
17:30-17:45	A	899	907
	B	51	51
	C	1320	1332
17:45-18:00	A	899	907
	B	51	51
	C	1320	1332
18:00-18:15	A	899	907
	B	51	51
	C	1320	1332

## Results

**Results Summary for whole modelled period**

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	0.74	11.17	2.8	?	B	907	1361
B	0.06	4.87	0.1	~1	A	51	77
C	0.97	71.76	25.5	?	F	1332	1998

**Main Results for each time segment**
**16:45 - 17:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	907	227	22	1233	0.736	896	1282	0.0	2.7	10.492	B
B	51	13	879	795	0.064	51	39	0.0	0.1	4.833	A
C	1332	333	28	1367	0.974	1276	902	0.0	14.1	30.408	D

**17:00 - 17:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	907	227	23	1232	0.736	907	1321	2.7	2.8	11.139	B
B	51	13	890	790	0.065	51	40	0.1	0.1	4.871	A
C	1332	333	28	1367	0.974	1315	913	14.1	18.3	51.427	F

**17:15 - 17:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	907	227	23	1232	0.736	907	1327	2.8	2.8	11.156	B
B	51	13	890	790	0.065	51	40	0.1	0.1	4.872	A
C	1332	333	28	1367	0.974	1321	913	18.3	20.9	59.337	F

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	907	227	23	1232	0.736	907	1329	2.8	2.8	11.161	B
B	51	13	890	790	0.065	51	40	0.1	0.1	4.872	A
C	1332	333	28	1367	0.974	1324	913	20.9	22.8	64.652	F

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	907	227	23	1232	0.736	907	1331	2.8	2.8	11.166	B
B	51	13	890	790	0.065	51	40	0.1	0.1	4.872	A
C	1332	333	28	1367	0.974	1326	913	22.8	24.3	68.622	F

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	907	227	23	1232	0.736	907	1332	2.8	2.8	11.167	B
B	51	13	890	790	0.065	51	40	0.1	0.1	4.872	A
C	1332	333	28	1367	0.974	1327	913	24.3	25.5	71.756	F

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.69	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	14.08	?	?	?	?			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.75	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	18.25	?	?	?	?			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.77	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	20.90	?	?	?	?			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.78	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	22.82	?	?	?	?			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.79	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	24.30	?	?	?	?			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.79	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	25.48	?	?	?	?			N/A	N/A



# 2024 DS1 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	1150.38	F

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D3	2024 DS1 Base	AM	Base (no Stubbington bypass) to 2024 growth	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1620	100.000
B		FLAT	✓	46	100.000
C		FLAT	✓	809	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	19	1602
	B	26	0	20
	C	785	24	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.57	0.00	0.43
	C	0.97	0.03	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

		To		
		A	B	C
From	A	0	6	3
	B	0	0	11
	C	7	4	0

**Average PCU Per Veh**

		To		
		A	B	C
From	A	1.000	1.056	1.030
	B	1.000	1.000	1.105
	C	1.067	1.043	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1620	1669
	B	46	48
	C	809	862
08:00-08:15	A	1620	1669
	B	46	48
	C	809	862
08:15-08:30	A	1620	1669
	B	46	48
	C	809	862
08:30-08:45	A	1620	1669
	B	46	48
	C	809	862
08:45-09:00	A	1620	1669
	B	46	48
	C	809	862
09:00-09:15	A	1620	1669
	B	46	48
	C	809	862

## Results

**Results Summary for whole modelled period**

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	1.36	1773.55	659.9	?	F	1669	2504
B	0.08	6.61	0.1	~1	A	48	71
C	0.63	7.59	1.8	?	A	862	1294

**Main Results for each time segment**
**07:45 - 08:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1669	417	25	1231	1.356	1220	856	0.0	112.3	171.019	F
B	48	12	1206	623	0.076	47	39	0.0	0.1	6.531	A
C	862	216	26	1368	0.630	855	1227	0.0	1.8	7.387	A

**08:00 - 08:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1669	417	25	1231	1.356	1231	863	112.3	221.8	494.253	F
B	48	12	1216	617	0.077	48	39	0.1	0.1	6.604	A
C	862	216	26	1368	0.630	862	1238	1.8	1.8	7.587	A

**08:15 - 08:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1669	417	25	1231	1.356	1231	863	221.8	331.4	813.580	F
B	48	12	1216	617	0.077	48	39	0.1	0.1	6.605	A
C	862	216	26	1368	0.630	862	1238	1.8	1.8	7.590	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1669	417	25	1231	1.356	1231	864	331.4	440.9	1133.421	F
B	48	12	1216	617	0.077	48	39	0.1	0.1	6.605	A
C	862	216	26	1368	0.630	862	1238	1.8	1.8	7.590	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1669	417	25	1231	1.356	1231	864	440.9	550.4	1453.446	F
B	48	12	1216	617	0.077	48	39	0.1	0.1	6.605	A
C	862	216	26	1368	0.630	862	1238	1.8	1.8	7.590	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1669	417	25	1231	1.356	1231	864	550.4	659.9	1773.554	F
B	48	12	1216	617	0.077	48	39	0.1	0.1	6.605	A
C	862	216	26	1368	0.630	862	1238	1.8	1.8	7.590	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	112.28	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	1.78	?	?	?	?			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	221.84	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	1.80	?	?	?	?			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	331.37	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	1.81	?	?	?	?			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	440.90	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	1.81	?	?	?	?			N/A	N/A

**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	550.41	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	1.81	?	?	?	?			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	659.93	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	1.81	?	?	?	?			N/A	N/A

# 2024 DS1 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	92.42	F

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D4	2024 DS1 Base	PM	Base (no Stubbington bypass) growth to 2024	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	932	100.000
B		FLAT	✓	53	100.000
C		FLAT	✓	1369	100.000

## Origin-Destination Data

#### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	18	914
	B	29	0	24
	C	1345	24	0

#### Proportions

	To			
	A	B	C	
From	A	0.00	0.02	0.98
	B	0.55	0.00	0.45
	C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To		
	A	B	C
A	0	0	1
B	0	0	0
C	1	0	0

**Average PCU Per Veh**

From	To		
	A	B	C
A	1.000	1.000	1.009
B	1.000	1.000	1.000
C	1.009	1.000	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	932	940
	B	53	53
	C	1369	1381
17:00-17:15	A	932	940
	B	53	53
	C	1369	1381
17:15-17:30	A	932	940
	B	53	53
	C	1369	1381
17:30-17:45	A	932	940
	B	53	53
	C	1369	1381
17:45-18:00	A	932	940
	B	53	53
	C	1369	1381
18:00-18:15	A	932	940
	B	53	53
	C	1369	1381

## Results

**Results Summary for whole modelled period**

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	0.76	12.45	3.2	?	B	940	1411
B	0.07	5.00	0.1	~1	A	53	79
C	1.01	150.21	57.3	?	F	1381	2072

**Main Results for each time segment**
**16:45 - 17:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	940	235	22	1232	0.763	928	1307	0.0	3.1	11.518	B
B	53	13	911	779	0.068	53	40	0.0	0.1	4.953	A
C	1381	345	29	1367	1.011	1301	934	0.0	20.0	38.490	E

**17:00 - 17:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	940	235	23	1232	0.763	940	1348	3.1	3.2	12.404	B
B	53	13	922	773	0.068	53	41	0.1	0.1	5.000	A
C	1381	345	29	1366	1.011	1342	946	20.0	29.7	75.915	F

**17:15 - 17:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	940	235	23	1232	0.763	940	1355	3.2	3.2	12.434	B
B	53	13	923	773	0.068	53	41	0.1	0.1	5.001	A
C	1381	345	29	1366	1.011	1349	946	29.7	37.6	97.899	F

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	940	235	23	1232	0.763	940	1358	3.2	3.2	12.445	B
B	53	13	923	773	0.068	53	41	0.1	0.1	5.001	A
C	1381	345	29	1366	1.011	1353	947	37.6	44.7	116.836	F

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	940	235	23	1232	0.763	940	1361	3.2	3.2	12.451	B
B	53	13	923	773	0.068	53	41	0.1	0.1	5.002	A
C	1381	345	29	1366	1.011	1355	947	44.7	51.2	134.086	F

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	940	235	23	1232	0.763	940	1362	3.2	3.2	12.454	B
B	53	13	923	773	0.068	53	41	0.1	0.1	5.002	A
C	1381	345	29	1366	1.011	1357	947	51.2	57.3	150.215	F

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.08	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	20.01	?	?	?	?			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.16	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	29.70	?	?	?	?			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.19	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	37.64	?	?	?	?			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.21	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	44.69	?	?	?	?			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.22	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	51.17	?	?	?	?			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.22	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	57.27	?	?	?	?			N/A	N/A



# 2024 DS1 Base + Dev, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	1177.19	F

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D5	2024 DS1 Base + Dev	AM	Base (no Stubbington bypass) to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1631	100.000
B		FLAT	✓	126	100.000
C		FLAT	✓	831	100.000

## Origin-Destination Data

#### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	29	1602
	B	80	0	46
	C	785	46	0

#### Proportions

	To			
	A	B	C	
From	A	0.00	0.02	0.98
	B	0.63	0.00	0.37
	C	0.94	0.06	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

		To		
		A	B	C
From	A	0	4	3
	B	0	0	5
	C	7	2	0

**Average PCU Per Veh**

		To		
		A	B	C
From	A	1.000	1.035	1.030
	B	1.000	1.000	1.045
	C	1.067	1.023	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1631	1680
	B	126	128
	C	831	885
08:00-08:15	A	1631	1680
	B	126	128
	C	831	885
08:15-08:30	A	1631	1680
	B	126	128
	C	831	885
08:30-08:45	A	1631	1680
	B	126	128
	C	831	885
08:45-09:00	A	1631	1680
	B	126	128
	C	831	885
09:00-09:15	A	1631	1680
	B	126	128
	C	831	885

## Results

**Results Summary for whole modelled period**

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	1.38	1881.53	693.6	?	F	1680	2520
B	0.20	7.32	0.3	~1	A	128	191
C	0.66	8.45	2.1	?	A	885	1327

**Main Results for each time segment**
**07:45 - 08:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1680	420	47	1220	1.378	1209	909	0.0	117.7	180.507	F
B	128	32	1187	633	0.202	127	69	0.0	0.3	7.213	A
C	885	221	79	1339	0.661	877	1235	0.0	2.0	8.163	A

**08:00 - 08:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1680	420	47	1219	1.378	1219	917	117.7	232.9	523.272	F
B	128	32	1197	628	0.203	128	69	0.3	0.3	7.317	A
C	885	221	80	1338	0.661	885	1245	2.0	2.0	8.445	A

**08:15 - 08:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1680	420	47	1219	1.378	1219	917	232.9	348.1	862.352	F
B	128	32	1197	628	0.203	128	69	0.3	0.3	7.318	A
C	885	221	80	1338	0.661	885	1245	2.0	2.1	8.448	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1680	420	47	1219	1.378	1219	917	348.1	463.3	1201.932	F
B	128	32	1197	628	0.203	128	69	0.3	0.3	7.318	A
C	885	221	80	1338	0.661	885	1245	2.1	2.1	8.450	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1680	420	47	1219	1.378	1219	917	463.3	578.4	1541.690	F
B	128	32	1197	628	0.203	128	69	0.3	0.3	7.319	A
C	885	221	80	1338	0.661	885	1245	2.1	2.1	8.450	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1680	420	47	1219	1.378	1219	917	578.4	693.6	1881.527	F
B	128	32	1197	628	0.203	128	69	0.3	0.3	7.319	A
C	885	221	80	1338	0.661	885	1245	2.1	2.1	8.452	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	117.74	?	?	?	?			N/A	N/A
B	0.25	~1	~1	~1	~1			N/A	N/A
C	2.02	?	?	?	?			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	232.93	?	?	?	?			N/A	N/A
B	0.26	~1	~1	~1	~1			N/A	N/A
C	2.05	?	?	?	?			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	348.10	?	?	?	?			N/A	N/A
B	0.26	~1	~1	~1	~1			N/A	N/A
C	2.06	?	?	?	?			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	463.26	?	?	?	?			N/A	N/A
B	0.26	~1	~1	~1	~1			N/A	N/A
C	2.06	?	?	?	?			N/A	N/A

**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	578.41	?	?	?	?			N/A	N/A
B	0.26	~1	~1	~1	~1			N/A	N/A
C	2.07	?	?	?	?			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	693.57	?	?	?	?			N/A	N/A
B	0.26	~1	~1	~1	~1			N/A	N/A
C	2.07	?	?	?	?			N/A	N/A

# 2024 DS1 Base + Dev, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	155.90	F

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D6	2024 DS1 Base + Dev	PM	Base (no Stubbington bypass) growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	978	100.000
B		FLAT	✓	102	100.000
C		FLAT	✓	1400	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	63	914
B	49	0	53
C	1345	55	0

### Proportions

From	To		
	A	B	C
A	0.00	0.06	0.94
B	0.48	0.00	0.52
C	0.96	0.04	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To			
	A	B	C	
	A	0	0	1
	B	0	0	0
C	1	0	0	

**Average PCU Per Veh**

From	To			
	A	B	C	
	A	1.000	1.000	1.009
	B	1.000	1.000	1.000
C	1.009	1.000	1.000	

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	978	986
	B	102	102
	C	1400	1412
17:00-17:15	A	978	986
	B	102	102
	C	1400	1412
17:15-17:30	A	978	986
	B	102	102
	C	1400	1412
17:30-17:45	A	978	986
	B	102	102
	C	1400	1412
17:45-18:00	A	978	986
	B	102	102
	C	1400	1412
18:00-18:15	A	978	986
	B	102	102
	C	1400	1412

## Results

**Results Summary for whole modelled period**

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	0.81	15.74	4.3	?	C	986	1479
B	0.13	5.37	0.2	~1	A	102	153
C	1.04	264.64	104.6	?	F	1412	2118

**Main Results for each time segment**
**16:45 - 17:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	986	247	51	1217	0.810	970	1304	0.0	4.0	13.928	B
B	102	25	908	780	0.131	101	113	0.0	0.1	5.297	A
C	1412	353	49	1356	1.042	1306	961	0.0	26.6	47.092	E

**17:00 - 17:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	986	247	52	1216	0.811	986	1340	4.0	4.1	15.604	C
B	102	25	922	773	0.132	102	116	0.1	0.2	5.364	A
C	1412	353	49	1355	1.042	1344	975	26.6	43.7	103.723	F

**17:15 - 17:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	986	247	53	1216	0.811	986	1345	4.1	4.2	15.687	C
B	102	25	923	773	0.132	102	116	0.2	0.2	5.366	A
C	1412	353	49	1355	1.042	1349	976	43.7	59.5	145.817	F

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	986	247	53	1216	0.811	986	1347	4.2	4.2	15.717	C
B	102	25	923	773	0.132	102	116	0.2	0.2	5.367	A
C	1412	353	49	1355	1.042	1351	976	59.5	74.8	186.120	F

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	986	247	53	1216	0.811	986	1348	4.2	4.2	15.733	C
B	102	25	923	773	0.132	102	116	0.2	0.2	5.367	A
C	1412	353	49	1355	1.042	1352	976	74.8	89.8	225.612	F

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	986	247	53	1216	0.811	986	1349	4.2	4.3	15.743	C
B	102	25	923	773	0.132	102	116	0.2	0.2	5.367	A
C	1412	353	49	1355	1.042	1353	976	89.8	104.6	264.640	F

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.96	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	26.56	?	?	?	?			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	4.13	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	43.67	?	?	?	?			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	4.19	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	59.52	?	?	?	?			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	4.22	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	74.82	?	?	?	?			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	4.24	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	89.81	?	?	?	?			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	4.26	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	104.61	?	?	?	?			N/A	N/A



# 2019 DS2 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	1134.11	F

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D7	2019 DS2 Base	AM	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1571	100.000
B		FLAT	✓	44	100.000
C		FLAT	✓	523	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	22	1549
	B	20	0	24
	C	504	19	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.46	0.00	0.54
	C	0.96	0.04	0.00

## Vehicle Mix

### Heavy Vehicle Percentages

From	To		
	A	B	C
A	0	6	3
B	0	0	11
C	7	4	0

### Average PCU Per Veh

From	To		
	A	B	C
A	1.000	1.056	1.030
B	1.000	1.000	1.105
C	1.067	1.043	1.000

## Detailed Demand Data

### Demand for each time segment

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1571	1618
	B	44	46
	C	523	557
08:00-08:15	A	1571	1618
	B	44	46
	C	523	557
08:15-08:30	A	1571	1618
	B	44	46
	C	523	557
08:30-08:45	A	1571	1618
	B	44	46
	C	523	557
08:45-09:00	A	1571	1618
	B	44	46
	C	523	557
09:00-09:15	A	1571	1618
	B	44	46
	C	523	557

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	1.31	1555.44	579.7	?	F	1618	2427
B	0.08	6.66	0.1	~1	A	46	70
C	0.41	4.71	0.7	~1	A	557	836

### Main Results for each time segment

#### 07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1618	404	20	1234	1.311	1221	554	0.0	99.2	152.062	F
B	46	12	1204	624	0.074	46	37	0.0	0.1	6.582	A
C	557	139	20	1372	0.406	554	1230	0.0	0.7	4.682	A

**08:00 - 08:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1618	404	20	1234	1.312	1233	557	99.2	195.4	435.875	F
B	46	12	1216	618	0.075	46	37	0.1	0.1	6.662	A
C	557	139	20	1372	0.406	557	1242	0.7	0.7	4.714	A

**08:15 - 08:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1618	404	20	1234	1.312	1234	557	195.4	291.5	715.229	F
B	46	12	1216	618	0.075	46	37	0.1	0.1	6.663	A
C	557	139	20	1372	0.406	557	1242	0.7	0.7	4.714	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1618	404	20	1234	1.312	1234	557	291.5	387.6	995.137	F
B	46	12	1216	618	0.075	46	37	0.1	0.1	6.663	A
C	557	139	20	1372	0.406	557	1242	0.7	0.7	4.714	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1618	404	20	1234	1.312	1234	557	387.6	483.7	1275.245	F
B	46	12	1216	618	0.075	46	37	0.1	0.1	6.663	A
C	557	139	20	1372	0.406	557	1242	0.7	0.7	4.714	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1618	404	20	1234	1.312	1234	557	483.7	579.7	1555.444	F
B	46	12	1216	618	0.075	46	37	0.1	0.1	6.663	A
C	557	139	20	1372	0.406	557	1242	0.7	0.7	4.714	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	99.23	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	0.72	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	195.38	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.73	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	291.48	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.73	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	387.57	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.73	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	483.65	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.73	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	579.74	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.73	~1	~1	~1	~1			N/A	N/A

# 2019 DS2 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	8.54	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D8	2019 DS2 Base	PM	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	883	100.000
B		FLAT	✓	54	100.000
C		FLAT	✓	809	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	23	860
	B	23	0	31
	C	790	19	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.03	0.97
	B	0.43	0.00	0.57
	C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To		
	A	B	C
A	0	0	1
B	0	0	0
C	1	0	0

**Average PCU Per Veh**

From	To		
	A	B	C
A	1.000	1.000	1.009
B	1.000	1.000	1.000
C	1.009	1.000	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	883	891
	B	54	54
	C	809	816
17:00-17:15	A	883	891
	B	54	54
	C	809	816
17:15-17:30	A	883	891
	B	54	54
	C	809	816
17:30-17:45	A	883	891
	B	54	54
	C	809	816
17:45-18:00	A	883	891
	B	54	54
	C	809	816
18:00-18:15	A	883	891
	B	54	54
	C	809	816

## Results

**Results Summary for whole modelled period**

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	0.72	10.58	2.6	?	B	891	1336
B	0.07	4.82	0.1	~1	A	54	81
C	0.60	6.56	1.5	?	A	816	1224

**Main Results for each time segment**
**16:45 - 17:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	891	223	19	1234	0.722	881	814	0.0	2.5	10.018	B
B	54	14	858	806	0.067	54	42	0.0	0.1	4.783	A
C	816	204	23	1370	0.596	810	889	0.0	1.5	6.427	A

**17:00 - 17:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	891	223	19	1234	0.722	891	820	2.5	2.6	10.564	B
B	54	14	868	801	0.068	54	42	0.1	0.1	4.818	A
C	816	204	23	1370	0.596	816	899	1.5	1.5	6.561	A

**17:15 - 17:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	891	223	19	1234	0.722	891	820	2.6	2.6	10.576	B
B	54	14	868	801	0.068	54	42	0.1	0.1	4.818	A
C	816	204	23	1370	0.596	816	899	1.5	1.5	6.561	A

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	891	223	19	1234	0.722	891	820	2.6	2.6	10.583	B
B	54	14	868	801	0.068	54	42	0.1	0.1	4.818	A
C	816	204	23	1370	0.596	816	899	1.5	1.5	6.561	A

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	891	223	19	1234	0.722	891	820	2.6	2.6	10.582	B
B	54	14	868	801	0.068	54	42	0.1	0.1	4.818	A
C	816	204	23	1370	0.596	816	899	1.5	1.5	6.561	A

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	891	223	19	1234	0.722	891	820	2.6	2.6	10.582	B
B	54	14	868	801	0.068	54	42	0.1	0.1	4.818	A
C	816	204	23	1370	0.596	816	899	1.5	1.5	6.561	A

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.52	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	1.46	?	?	?	?			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.57	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	1.47	?	?	?	?			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.58	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	1.48	?	?	?	?			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.59	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	1.48	?	?	?	?			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.60	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	1.48	?	?	?	?			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.60	?	?	?	?			N/A	N/A
B	0.07	~1	~1	~1	~1			N/A	N/A
C	1.48	?	?	?	?			N/A	N/A



# 2024 DS2 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	1302.00	F

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D9	2024 DS2 Base	AM	Base to 2024 growth	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1626	100.000
B		FLAT	✓	45	100.000
C		FLAT	✓	541	100.000

## Origin-Destination Data

#### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	23	1604
	B	21	0	25
	C	521	20	0

#### Proportions

	To			
	A	B	C	
From	A	0.00	0.01	0.99
	B	0.46	0.00	0.54
	C	0.96	0.04	0.00

## Vehicle Mix

### Heavy Vehicle Percentages

From	To		
	A	B	C
A	0	6	3
B	0	0	11
C	7	4	0

### Average PCU Per Veh

From	To		
	A	B	C
A	1.000	1.056	1.030
B	1.000	1.000	1.105
C	1.067	1.043	1.000

## Detailed Demand Data

### Demand for each time segment

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1626	1675
	B	45	48
	C	541	577
08:00-08:15	A	1626	1675
	B	45	48
	C	541	577
08:15-08:30	A	1626	1675
	B	45	48
	C	541	577
08:30-08:45	A	1626	1675
	B	45	48
	C	541	577
08:45-09:00	A	1626	1675
	B	45	48
	C	541	577
09:00-09:15	A	1626	1675
	B	45	48
	C	541	577

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	1.36	1785.95	665.8	?	F	1675	2513
B	0.08	6.68	0.1	~1	A	48	72
C	0.42	4.83	0.8	~1	A	577	865

### Main Results for each time segment

#### 07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1675	419	20	1233	1.358	1222	574	0.0	113.3	172.104	F
B	48	12	1205	624	0.077	48	38	0.0	0.1	6.606	A
C	577	144	21	1371	0.421	574	1232	0.0	0.8	4.797	A

**08:00 - 08:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1675	419	21	1233	1.358	1233	577	113.3	223.8	497.585	F
B	48	12	1215	618	0.078	48	38	0.1	0.1	6.679	A
C	577	144	21	1371	0.421	577	1243	0.8	0.8	4.833	A

**08:15 - 08:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1675	419	21	1233	1.358	1233	577	223.8	334.3	819.179	F
B	48	12	1216	618	0.078	48	38	0.1	0.1	6.680	A
C	577	144	21	1371	0.421	577	1243	0.8	0.8	4.833	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1675	419	21	1233	1.358	1233	577	334.3	444.8	1141.282	F
B	48	12	1216	618	0.078	48	38	0.1	0.1	6.680	A
C	577	144	21	1371	0.421	577	1243	0.8	0.8	4.833	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1675	419	21	1233	1.358	1233	577	444.8	555.3	1463.572	F
B	48	12	1216	618	0.078	48	38	0.1	0.1	6.680	A
C	577	144	21	1371	0.421	577	1243	0.8	0.8	4.833	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1675	419	21	1233	1.358	1233	577	555.3	665.8	1785.945	F
B	48	12	1216	618	0.078	48	38	0.1	0.1	6.680	A
C	577	144	21	1371	0.421	577	1243	0.8	0.8	4.833	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	113.25	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.77	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	223.79	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.77	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	334.30	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.77	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	444.79	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.77	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	555.29	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.77	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	665.78	?	?	?	?			N/A	N/A
B	0.09	~1	~1	~1	~1			N/A	N/A
C	0.77	~1	~1	~1	~1			N/A	N/A

# 2024 DS2 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	9.29	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D10	2024 DS2 Base	PM	Base growth to 2024	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	916	100.000
B		FLAT	✓	56	100.000
C		FLAT	✓	839	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	24	892
	B	24	0	32
	C	819	20	0

### Proportions

	To			
	A	B	C	
From	A	0.00	0.03	0.97
	B	0.43	0.00	0.57
	C	0.98	0.02	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To		
	A	B	C
A	0	0	1
B	0	0	0
C	1	0	0

**Average PCU Per Veh**

From	To		
	A	B	C
A	1.000	1.000	1.009
B	1.000	1.000	1.000
C	1.009	1.000	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	916	924
	B	56	56
	C	839	846
17:00-17:15	A	916	924
	B	56	56
	C	839	846
17:15-17:30	A	916	924
	B	56	56
	C	839	846
17:30-17:45	A	916	924
	B	56	56
	C	839	846
17:45-18:00	A	916	924
	B	56	56
	C	839	846
18:00-18:15	A	916	924
	B	56	56
	C	839	846

## Results

**Results Summary for whole modelled period**

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	0.75	11.71	3.0	?	B	924	1386
B	0.07	4.94	0.1	~1	A	56	84
C	0.62	6.94	1.6	?	A	846	1269

**Main Results for each time segment**
**16:45 - 17:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	924	231	20	1234	0.749	912	844	0.0	2.9	10.943	B
B	56	14	889	790	0.071	56	43	0.0	0.1	4.900	A
C	846	212	24	1369	0.618	840	921	0.0	1.6	6.780	A

**17:00 - 17:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	924	231	20	1234	0.749	923	850	2.9	2.9	11.680	B
B	56	14	900	785	0.072	56	43	0.1	0.1	4.943	A
C	846	212	24	1369	0.618	846	932	1.6	1.6	6.941	A

**17:15 - 17:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	924	231	20	1234	0.749	924	850	2.9	3.0	11.701	B
B	56	14	900	784	0.072	56	43	0.1	0.1	4.943	A
C	846	212	24	1369	0.618	846	932	1.6	1.6	6.944	A

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	924	231	20	1234	0.749	924	850	3.0	3.0	11.706	B
B	56	14	900	784	0.072	56	43	0.1	0.1	4.943	A
C	846	212	24	1369	0.618	846	932	1.6	1.6	6.944	A

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	924	231	20	1234	0.749	924	850	3.0	3.0	11.710	B
B	56	14	900	784	0.072	56	43	0.1	0.1	4.943	A
C	846	212	24	1369	0.618	846	932	1.6	1.6	6.944	A

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	924	231	20	1234	0.749	924	850	3.0	3.0	11.712	B
B	56	14	900	784	0.072	56	43	0.1	0.1	4.943	A
C	846	212	24	1369	0.618	846	932	1.6	1.6	6.944	A

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.86	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.60	?	?	?	?			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.93	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.62	?	?	?	?			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.96	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.62	?	?	?	?			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.97	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.62	?	?	?	?			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.98	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.63	?	?	?	?			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	2.98	?	?	?	?			N/A	N/A
B	0.08	~1	~1	~1	~1			N/A	N/A
C	1.63	?	?	?	?			N/A	N/A



# 2024 DS2 Base + Dev, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	1312.84	F

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D11	2024 DS2 Base + Dev	AM	Base to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1634	100.000
B		FLAT	✓	132	100.000
C		FLAT	✓	563	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To			
	A	B	C	
A	0	31	1604	
B	81	0	51	
C	521	42	0	

### Proportions

From	To			
	A	B	C	
A	0.00	0.02	0.98	
B	0.61	0.00	0.39	
C	0.93	0.07	0.00	

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To		
	A	B	C
A	0	4	3
B	0	0	5
C	7	2	0

**Average PCU Per Veh**

From	To		
	A	B	C
A	1.000	1.041	1.030
B	1.000	1.000	1.051
C	1.067	1.020	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
07:45-08:00	A	1634	1683
	B	132	135
	C	563	599
08:00-08:15	A	1634	1683
	B	132	135
	C	563	599
08:15-08:30	A	1634	1683
	B	132	135
	C	563	599
08:30-08:45	A	1634	1683
	B	132	135
	C	563	599
08:45-09:00	A	1634	1683
	B	132	135
	C	563	599
09:00-09:15	A	1634	1683
	B	132	135
	C	563	599

## Results

**Results Summary for whole modelled period**

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	1.38	1882.76	695.3	?	F	1683	2525
B	0.21	7.46	0.3	~1	A	135	202
C	0.45	5.19	0.9	~1	A	599	899

**Main Results for each time segment**
**07:45 - 08:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1683	421	42	1222	1.378	1211	634	0.0	118.0	180.638	F
B	135	34	1188	632	0.213	134	66	0.0	0.3	7.345	A
C	599	150	80	1338	0.448	596	1241	0.0	0.9	5.138	A

**08:00 - 08:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1683	421	43	1222	1.378	1221	637	118.0	233.5	523.639	F
B	135	34	1198	627	0.215	135	66	0.3	0.3	7.456	A
C	599	150	81	1337	0.448	599	1252	0.9	0.9	5.187	A

**08:15 - 08:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1683	421	43	1222	1.378	1222	637	233.5	349.0	862.937	F
B	135	34	1198	627	0.215	135	66	0.3	0.3	7.457	A
C	599	150	81	1337	0.448	599	1252	0.9	0.9	5.187	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1683	421	43	1222	1.378	1222	637	349.0	464.4	1202.732	F
B	135	34	1198	627	0.215	135	66	0.3	0.3	7.457	A
C	599	150	81	1337	0.448	599	1252	0.9	0.9	5.187	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1683	421	43	1222	1.378	1222	637	464.4	579.9	1542.708	F
B	135	34	1198	627	0.215	135	66	0.3	0.3	7.458	A
C	599	150	81	1337	0.448	599	1252	0.9	0.9	5.187	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	1683	421	43	1222	1.378	1222	637	579.9	695.3	1882.761	F
B	135	34	1198	627	0.215	135	66	0.3	0.3	7.458	A
C	599	150	81	1337	0.448	599	1252	0.9	0.9	5.187	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	118.05	?	?	?	?			N/A	N/A
B	0.27	~1	~1	~1	~1			N/A	N/A
C	0.85	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	233.53	?	?	?	?			N/A	N/A
B	0.28	~1	~1	~1	~1			N/A	N/A
C	0.86	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	348.98	?	?	?	?			N/A	N/A
B	0.28	~1	~1	~1	~1			N/A	N/A
C	0.86	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	464.43	?	?	?	?			N/A	N/A
B	0.28	~1	~1	~1	~1			N/A	N/A
C	0.86	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	579.87	?	?	?	?			N/A	N/A
B	0.28	~1	~1	~1	~1			N/A	N/A
C	0.86	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	695.32	?	?	?	?			N/A	N/A
B	0.28	~1	~1	~1	~1			N/A	N/A
C	0.86	~1	~1	~1	~1			N/A	N/A

# 2024 DS2 Base + Dev, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	Standard Roundabout		A, B, C	10.95	B

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D12	2024 DS2 Base + Dev	PM	Base growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	961	100.000
B		FLAT	✓	105	100.000
C		FLAT	✓	870	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	69	892
B	44	0	61
C	819	51	0

### Proportions

From	To		
	A	B	C
A	0.00	0.07	0.93
B	0.42	0.00	0.58
C	0.94	0.06	0.00

## Vehicle Mix

**Heavy Vehicle Percentages**

From	To		
	A	B	C
A	0	0	1
B	0	0	0
C	1	0	0

**Average PCU Per Veh**

From	To		
	A	B	C
A	1.000	1.000	1.009
B	1.000	1.000	1.000
C	1.009	1.000	1.000

## Detailed Demand Data

**Demand for each time segment**

Time Segment	Arm	Demand (Veh/hr)	Demand in PCU (PCU/hr)
16:45-17:00	A	961	970
	B	105	105
	C	870	877
17:00-17:15	A	961	970
	B	105	105
	C	870	877
17:15-17:30	A	961	970
	B	105	105
	C	870	877
17:30-17:45	A	961	970
	B	105	105
	C	870	877
17:45-18:00	A	961	970
	B	105	105
	C	870	877
18:00-18:15	A	961	970
	B	105	105
	C	870	877

## Results

**Results Summary for whole modelled period**

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
A	0.80	14.64	3.9	?	B	970	1454
B	0.13	5.30	0.2	~1	A	105	158
C	0.65	7.55	1.8	?	A	877	1316

**Main Results for each time segment**
**16:45 - 17:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	970	242	51	1217	0.796	955	863	0.0	3.7	13.181	B
B	105	26	887	792	0.133	105	119	0.0	0.2	5.236	A
C	877	219	44	1358	0.646	870	948	0.0	1.8	7.337	A

**17:00 - 17:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	970	242	51	1217	0.797	969	870	3.7	3.8	14.551	B
B	105	26	900	785	0.134	105	120	0.2	0.2	5.298	A
C	877	219	44	1358	0.646	877	961	1.8	1.8	7.549	A

**17:15 - 17:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	970	242	51	1217	0.797	969	870	3.8	3.8	14.602	B
B	105	26	900	785	0.134	105	120	0.2	0.2	5.299	A
C	877	219	44	1358	0.646	877	961	1.8	1.8	7.552	A

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	970	242	51	1217	0.797	969	870	3.8	3.9	14.622	B
B	105	26	900	784	0.134	105	120	0.2	0.2	5.300	A
C	877	219	44	1358	0.646	877	962	1.8	1.8	7.552	A

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	970	242	51	1217	0.797	969	870	3.9	3.9	14.634	B
B	105	26	900	784	0.134	105	120	0.2	0.2	5.300	A
C	877	219	44	1358	0.646	877	962	1.8	1.8	7.552	A

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
A	970	242	51	1217	0.797	970	870	3.9	3.9	14.640	B
B	105	26	900	784	0.134	105	120	0.2	0.2	5.300	A
C	877	219	44	1358	0.646	877	962	1.8	1.8	7.552	A

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.67	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	1.80	?	?	?	?			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.80	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	1.82	?	?	?	?			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.85	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	1.83	?	?	?	?			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.87	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	1.83	?	?	?	?			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.89	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	1.83	?	?	?	?			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
A	3.90	?	?	?	?			N/A	N/A
B	0.15	~1	~1	~1	~1			N/A	N/A
C	1.83	?	?	?	?			N/A	N/A




Basic Results Summary  
**Basic Results Summary**

**User and Project Details**

<b>Project:</b>	
<b>Title:</b>	
<b>Location:</b>	
<b>Additional detail:</b>	
<b>File name:</b>	NGL Sig jctn3.lsg3x
<b>Author:</b>	
<b>Company:</b>	
<b>Address:</b>	

**Scenario 1: '2024 Base + Dev AM DS1'** (FG1: '2024 Base + Dev AM DS1', Plan 1: 'Network Control Plan 1')

**Network Layout Diagram**

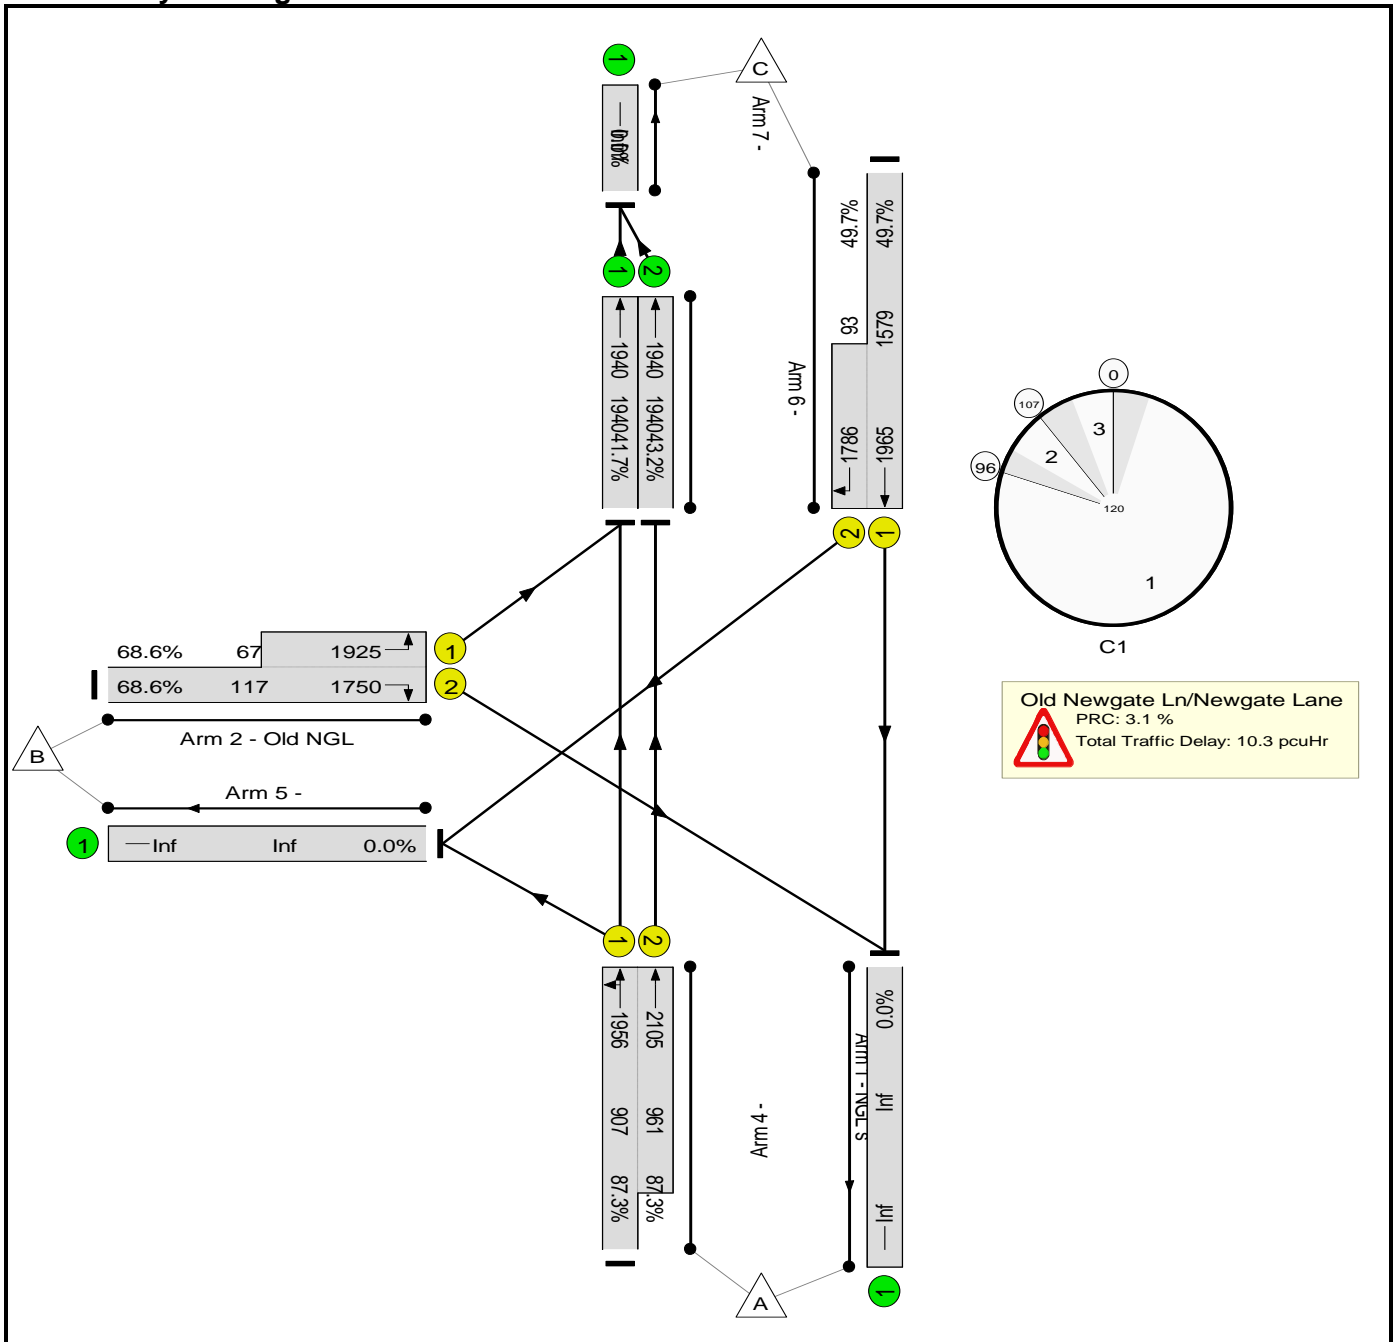

## Basic Results Summary

Basic Results Summary


**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)	
Network	-	-	-		-	-	-	-	-	-	87.3%	0	0	0	10.3	-	-	-	
Old Newgate Ln/Newgate Lane	-	-	-		-	-	-	-	-	-	87.3%	0	0	0	10.3	-	-	-	
1/1+1/2	NGL s Left Ahead	U	A		1	92	-	1631	1956:2105	907+961	87.3 : 87.3%	-	-	-	5.6	12.5	16.1	5.8	
2/2+2/1	Old NGL Right Left	U	C		1	7	-	126	1750:1925	117+67	68.6 : 68.6%	-	-	-	3.0	84.4	3.7	2.4	
3/1+3/2	NGL N Ahead Right	U	B		1	101	-	831	1965:1786	1579+93	49.7 : 49.7%	-	-	-	1.0	4.3	6.8	3.5	
6/1	Ahead	U	-		-	-	-	809	1940	1940	41.7%	-	-	-	0.4	1.6	0.4	-	
6/2	Ahead	U	-		-	-	-	839	1940	1940	43.2%	-	-	-	0.4	1.6	4.7	-	
				C1	PRC for Signalled Lanes (%):			3.1	Total Delay for Signalled Lanes (pcuHr):			9.60	Cycle Time (s): 120						
					PRC Over All Lanes (%):			3.1	Total Delay Over All Lanes(pcuHr):			10.34							

Basic Results Summary

Scenario 2: '2024 Base + Dev PM DS1' (FG2: '2024 Base + Dev PM DS1', Plan 1: 'Network Control Plan 1')

Network Layout Diagram

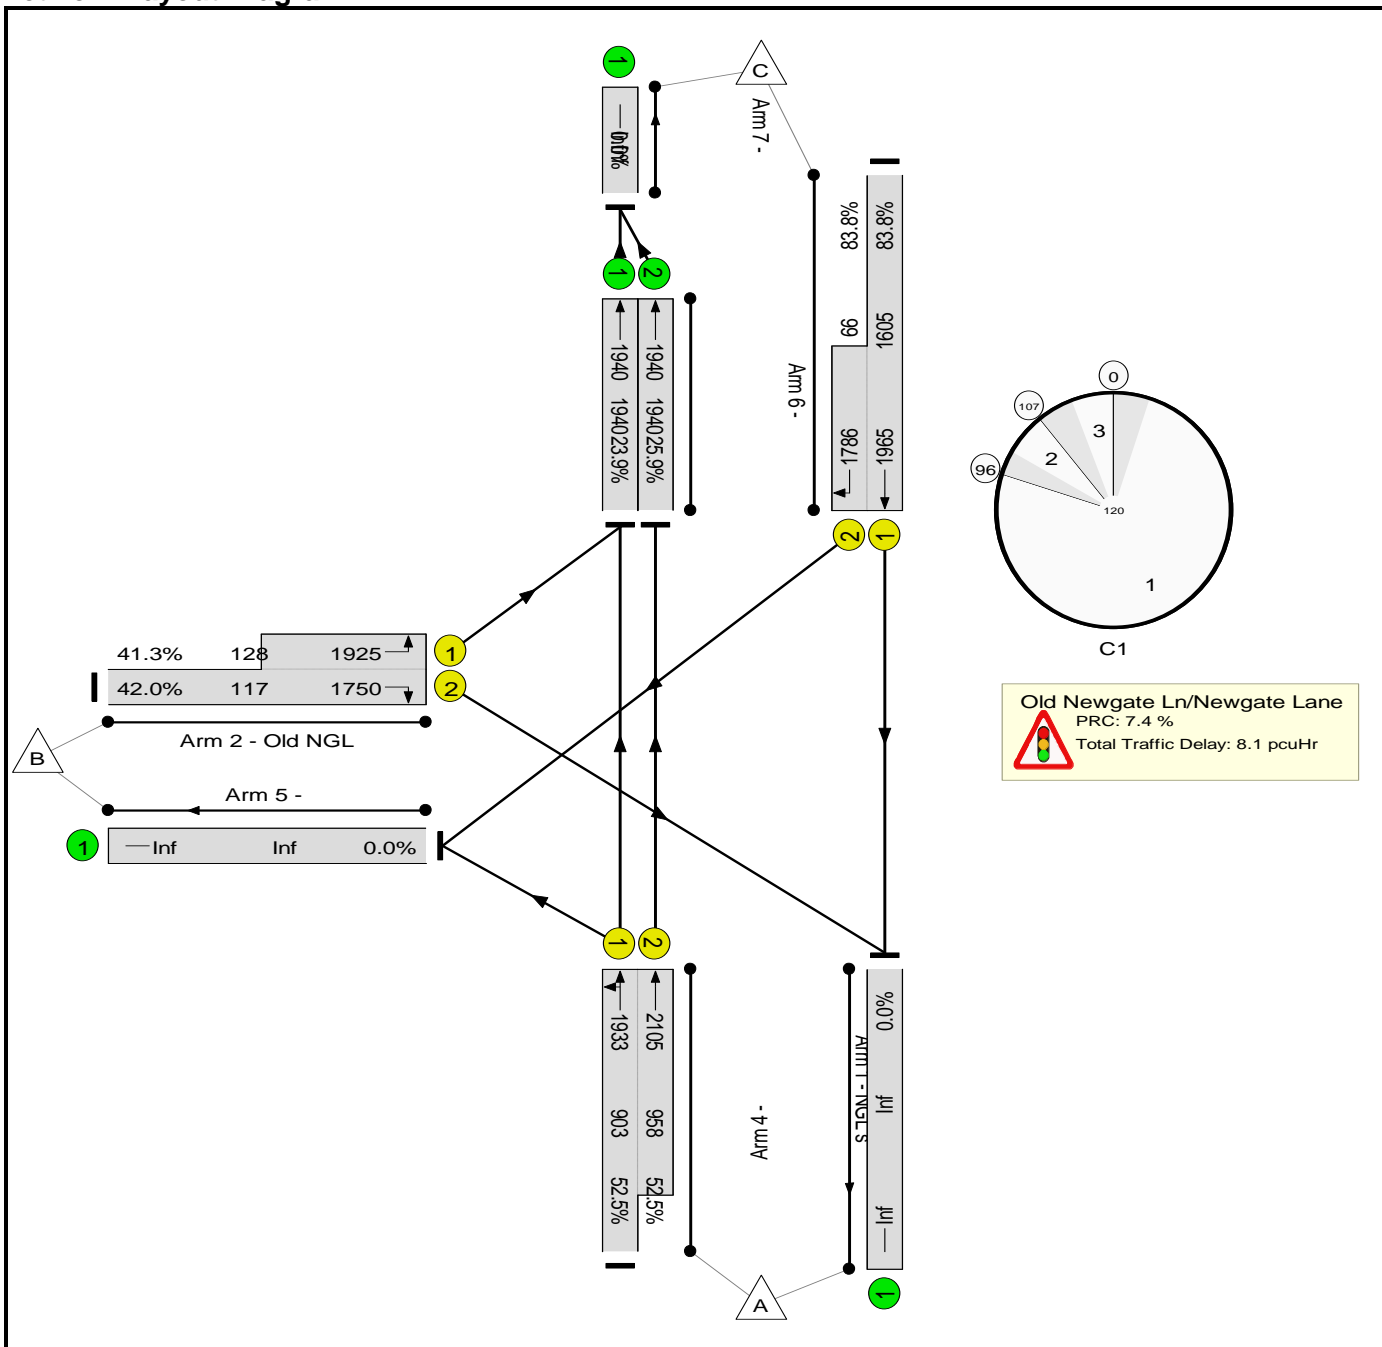

Basic Results Summary


**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
Network	-	-	-		-	-	-	-	-	-	83.8%	0	0	0	8.1	-	-	-
Old Newgate Ln/Newgate Lane	-	-	-		-	-	-	-	-	-	83.8%	0	0	0	8.1	-	-	-
1/1+1/2	NGL s Left Ahead	U	A		1	92	-	977	1933:2105	903+958	52.5 : 52.5%	-	-	-	1.6	6.0	5.4	3.5
2/2+2/1	Old NGL Right Left	U	C		1	7	-	102	1750:1925	117+128	42.0 : 41.3%	-	-	-	1.9	66.3	2.0	1.6
3/1+3/2	NGL N Ahead Right	U	B		1	101	-	1400	1965:1786	1605+66	83.8 : 83.8%	-	-	-	4.3	11.1	26.0	6.0
6/1	Ahead	U	-		-	-	-	464	1940	1940	23.9%	-	-	-	0.2	1.2	0.2	-
6/2	Ahead	U	-		-	-	-	503	1940	1940	25.9%	-	-	-	0.2	1.3	0.2	-
				C1	PRC for Signalled Lanes (%): 7.4			7.4	Total Delay for Signalled Lanes (pcuHr): 7.82				Cycle Time (s): 120					
					PRC Over All Lanes (%): 7.4			7.4	Total Delay Over All Lanes(pcuHr): 8.15									

Basic Results Summary

Scenario 3: '2024 Base + Dev AM DS2' (FG3: '2024 Base + Dev AM DS2', Plan 1: 'Network Control Plan 1')

Network Layout Diagram

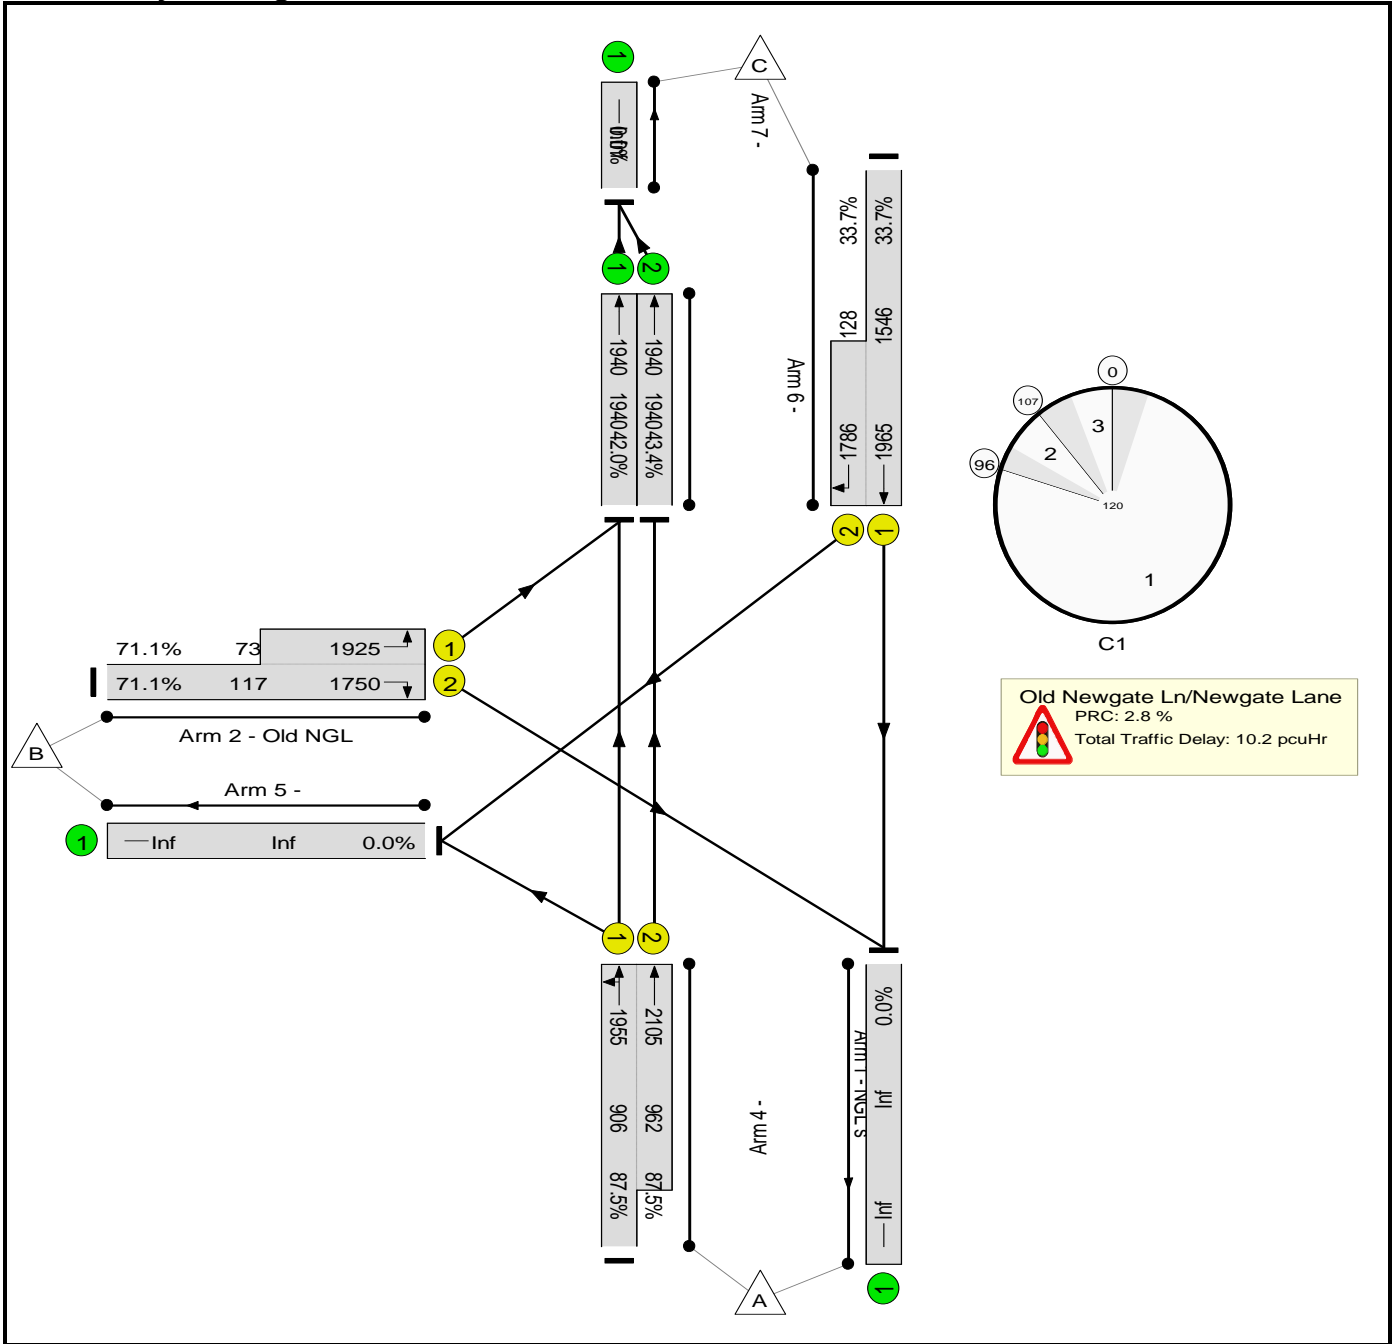

Basic Results Summary


**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)	
Network	-	-	-		-	-	-	-	-	-	87.5%	0	0	0	10.2	-	-	-	
Old Newgate Ln/Newgate Lane	-	-	-		-	-	-	-	-	-	87.5%	0	0	0	10.2	-	-	-	
1/1+1/2	NGL s Left Ahead	U	A		1	92	-	1635	1955:2105	906+962	87.5 : 87.5%	-	-	-	5.7	12.6	16.1	5.8	
2/2+2/1	Old NGL Right Left	U	C		1	7	-	135	1750:1925	117+73	71.1 : 71.1%	-	-	-	3.2	86.0	3.9	2.5	
3/1+3/2	NGL N Ahead Right	U	B		1	101	-	564	1965:1786	1546+128	33.7 : 33.7%	-	-	-	0.5	3.4	3.7	2.3	
6/1	Ahead	U	-		-	-	-	814	1940	1940	42.0%	-	-	-	0.4	1.6	0.4	-	
6/2	Ahead	U	-		-	-	-	842	1940	1940	43.4%	-	-	-	0.4	1.7	4.7	-	
C1					PRC for Signalled Lanes (%): 2.8			2.8		Total Delay for Signalled Lanes (pcuHr): 9.49			Cycle Time (s): 120						
					PRC Over All Lanes (%): 2.8					Total Delay Over All Lanes(pcuHr): 10.24									

Basic Results Summary

Scenario 4: '2024 Base + Dev PM DS2' (FG4: '2024 Base + Dev PM DS2', Plan 1: 'Network Control Plan 1')

Network Layout Diagram

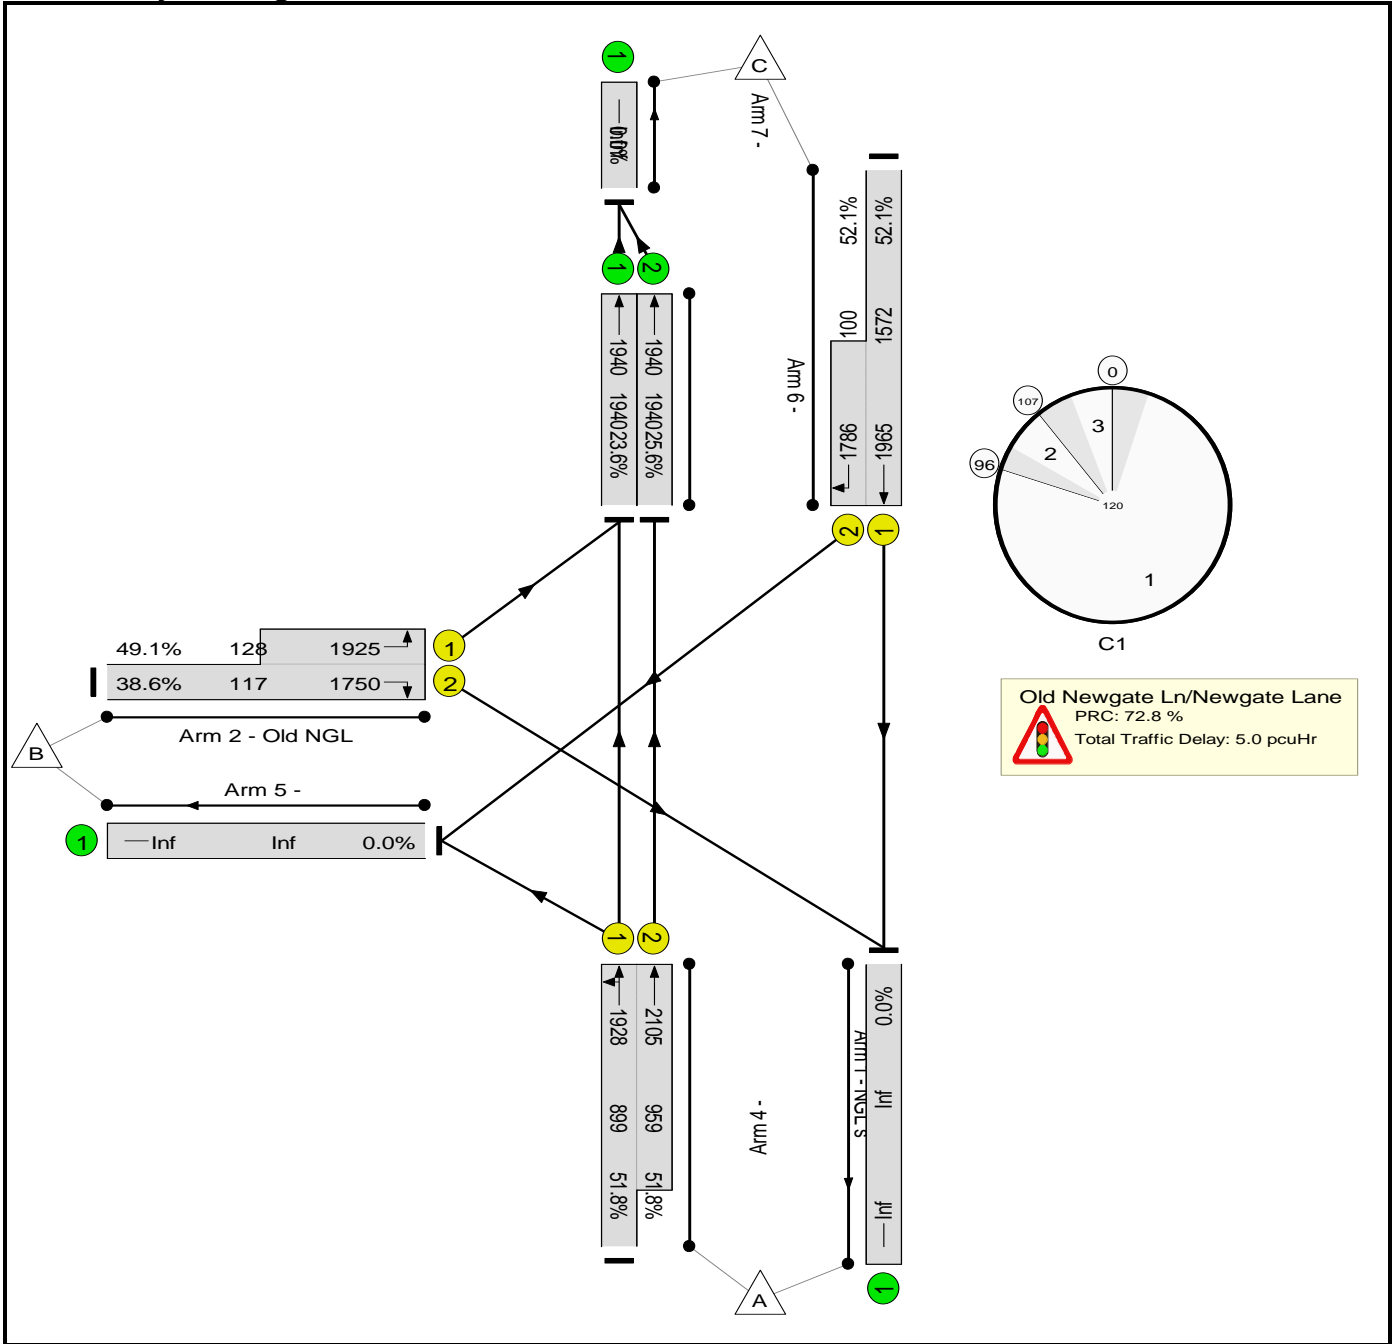



Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)	
Network	-	-	-		-	-	-	-	-	-	52.1%	0	0	0	5.0	-	-	-	
Old Newgate Ln/Newgate Lane	-	-	-		-	-	-	-	-	-	52.1%	0	0	0	5.0	-	-	-	
1/1+1/2	NGL s Left Ahead	U	A		1	92	-	963	1928:2105	899+959	51.8 : 51.8%	-	-	-	1.6	6.0	5.4	3.5	
2/2+2/1	Old NGL Right Left	U	C		1	7	-	108	1750:1925	117+128	38.6 : 49.1%	-	-	-	2.0	67.0	2.4	1.9	
3/1+3/2	NGL N Ahead Right	U	B		1	101	-	871	1965:1786	1572+100	52.1 : 52.1%	-	-	-	1.1	4.5	7.4	3.6	
6/1	Ahead	U	-		-	-	-	458	1940	1940	23.6%	-	-	-	0.2	1.2	0.2	-	
6/2	Ahead	U	-		-	-	-	497	1940	1940	25.6%	-	-	-	0.2	1.2	0.2	-	
C1					PRC for Signalled Lanes (%): 72.8			Total Delay for Signalled Lanes (pcuHr): 4.70			Cycle Time (s): 120								
					PRC Over All Lanes (%): 72.8			Total Delay Over All Lanes(pcuHr): 5.03											

# Junctions 9

## ARCADY 9 - Roundabout Module

Version: 9.5.0.6896

© Copyright TRL Limited, 2018

For sales and distribution information, program advice and maintenance, contact TRL:

+44 (0)1344 379777 software@trl.co.uk www.trlsoftware.co.uk

The users of this computer program for the solution of an engineering problem are in no way relieved of their responsibility for the correctness of the solution

**Filename:** NGL-Longfield Ave.j9

**Path:** \\Pg-brs-dc01\data\Bristol Projects\Bristol - Live Projects\BRS.4901 - BRS.5000\BRS.4989 - SUSTAINABLE LAND PLC - LAND TO THE NORTH OF GOSPORT ROAD, FAREHAM\Transport\7. Junction Modelling\c. ARCADY\19

**Report generation date:** 26/02/2019 14:36:11

- 
- »2019 Base DS1, AM
  - »2019 Base DS1, PM
  - »2024 Base DS1, AM
  - »2024 Base DS1, PM
  - »2024 Base + Dev DS1, AM
  - »2024 Base + Dev DS1, PM
  - »2019 Base DS2, AM
  - »2019 Base DS2, PM
  - »2024 Base DS2, AM
  - »2024 Base DS2, PM
  - »2024 Base + Dev DS2, AM
  - »2024 Base + Dev DS2, PM

## Summary of junction performance

	AM					PM				
	Queue (PCU)	Delay (s)	RFC	LOS	Junction LOS	Queue (PCU)	Delay (s)	RFC	LOS	Junction LOS
<b>2019 Base DS1</b>										
Arm 1	0.2	9.61	0.13	A	A	0.4	17.75	0.31	C	A
Arm 2	2.9	6.61	0.74	A		1.4	4.08	0.58	A	
Arm 3	0.7	4.26	0.42	A		0.9	4.17	0.49	A	
Arm 4	1.9	6.98	0.65	A		2.9	9.95	0.75	A	
<b>2024 Base DS1</b>										
Arm 1	0.2	10.24	0.14	B	A	0.6	21.29	0.36	C	A
Arm 2	3.4	7.40	0.77	A		1.6	4.32	0.61	A	
Arm 3	0.8	4.55	0.45	A		1.1	4.46	0.51	A	
Arm 4	2.2	7.63	0.68	A		3.5	11.70	0.78	B	
<b>2024 Base + Dev DS1</b>										
Arm 1	0.2	10.53	0.14	B	A	0.6	23.20	0.38	C	A
Arm 2	3.6	7.74	0.78	A		1.6	4.46	0.62	A	
Arm 3	0.8	4.66	0.46	A		1.1	4.61	0.53	A	
Arm 4	2.3	7.94	0.69	A		3.8	12.68	0.80	B	
<b>2019 Base DS2</b>										
Arm 1	0.1	7.15	0.10	A	A	0.2	7.18	0.15	A	A
Arm 2	2.4	5.72	0.70	A		1.3	3.90	0.57	A	
Arm 3	0.3	3.28	0.21	A		0.2	2.72	0.19	A	
Arm 4	1.4	5.11	0.57	A		1.2	4.55	0.54	A	
<b>2024 Base DS2</b>										
Arm 1	0.1	7.43	0.11	A	A	0.2	7.53	0.17	A	A
Arm 2	2.7	6.27	0.73	A		1.5	4.11	0.59	A	
Arm 3	0.3	3.42	0.22	A		0.2	2.80	0.20	A	
Arm 4	1.5	5.40	0.59	A		1.3	4.79	0.56	A	
<b>2024 Base + Dev DS2</b>										
Arm 1	0.1	7.59	0.11	A	A	0.2	7.76	0.17	A	A
Arm 2	2.8	6.45	0.73	A		1.5	4.24	0.60	A	
Arm 3	0.3	3.46	0.23	A		0.3	2.86	0.21	A	
Arm 4	1.6	5.57	0.60	A		1.4	4.94	0.58	A	

*There are warnings associated with one or more model runs - see the 'Data Errors and Warnings' tables for each Analysis or Demand Set.*

Values shown are the highest values encountered over all time segments. Delay is the maximum value of average delay per arriving vehicle. Junction LOS and Junction Delay are demand-weighted averages.


## File summary

### File Description

Title	(untitled)
Location	
Site number	
Date	20/04/2018
Version	
Status	(new file)
Identifier	
Client	
Jobnumber	
Enumerator	PEGASUSGROUP\Philip.Wragg
Description	

### Units

Distance units	Speed units	Traffic units input	Traffic units results	Flow units	Average delay units	Total delay units	Rate of delay units
m	kph	Veh	PCU	perHour	s	-Min	perMin

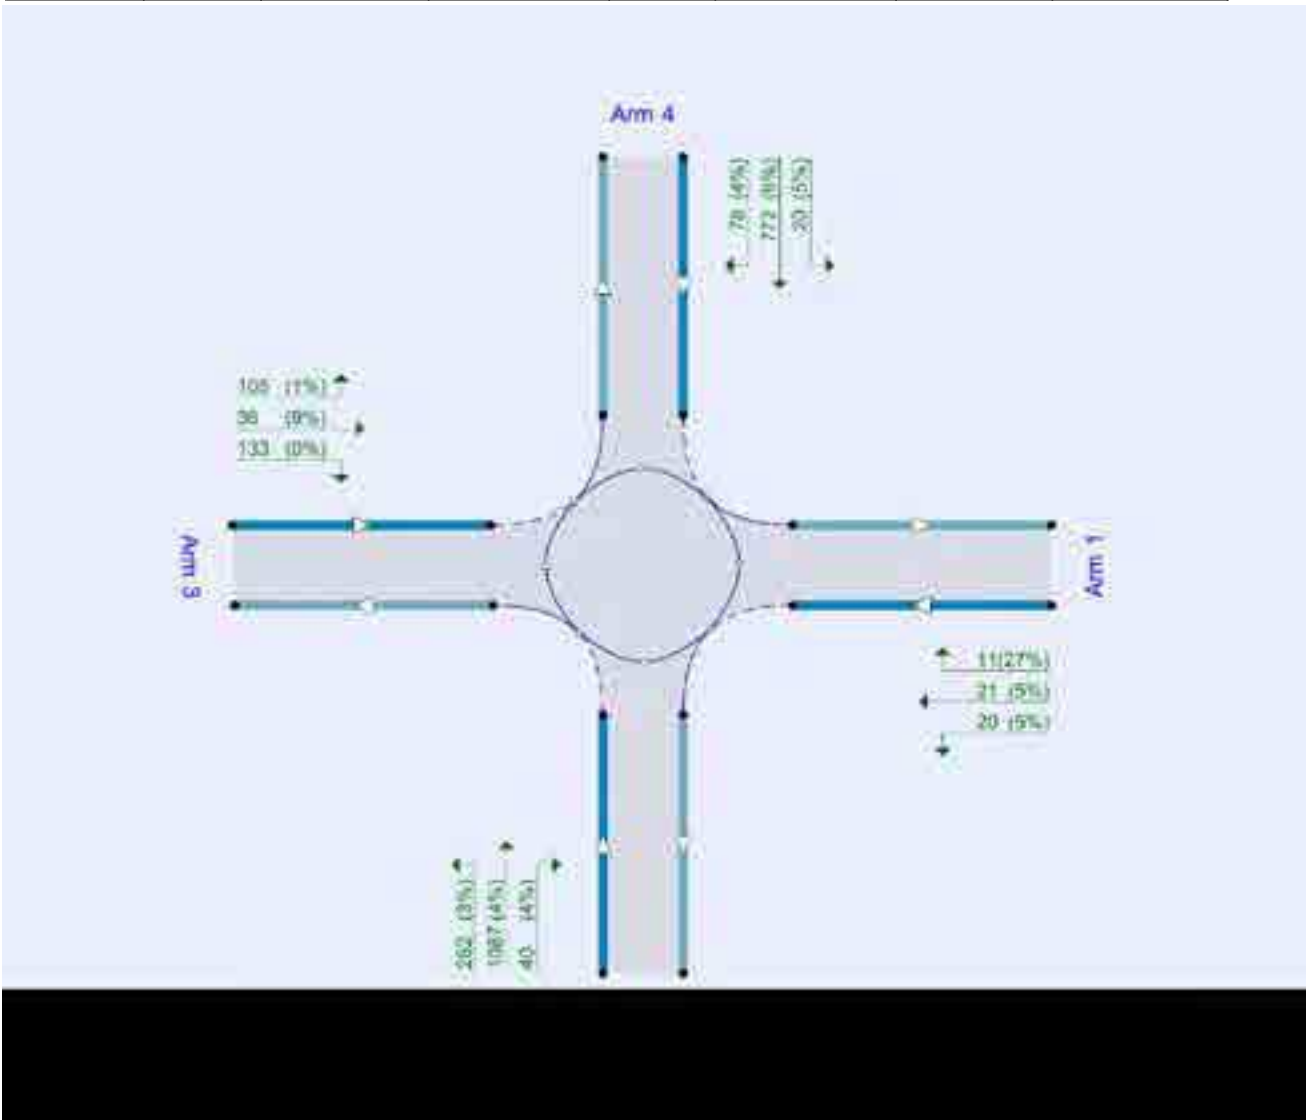

The junction diagram reflects the last run of Junctions.

### Analysis Options

Vehicle length (m)	Calculate Queue Percentiles	Calculate detailed queueing delay	Calculate residual capacity	RFC Threshold	Average Delay threshold (s)	Queue threshold (PCU)
5.75	✓			0.85	36.00	20.00

### Demand Set Summary

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D1	2019 Base DS1	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓
D2	2019 Base DS1	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓
D3	2024 Base DS1	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓
D4	2024 Base DS1	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓
D5	2024 Base + Dev DS1	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓
D6	2024 Base + Dev DS1	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓
D10	2019 Base DS2	AM	with Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓
D11	2019 Base DS2	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓
D12	2024 Base DS2	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓
D13	2024 Base DS2	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓
D14	2024 Base + Dev DS2	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓
D15	2024 Base + Dev DS2	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓

### Analysis Set Details

ID	Include in report	Network flow scaling factor (%)	Network capacity scaling factor (%)
A1	✓	100.000	100.000

# 2019 Base DS1, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	6.34	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Arms

### Arms

Arm	Name	Description
1	Davis Way	
2	Newgate Lane (South)	
3	Longfield Avenue	
4	Newgate Lane (North)	

### Roundabout Geometry

Arm	V - Approach road half-width (m)	E - Entry width (m)	I' - Effective flare length (m)	R - Entry radius (m)	D - Inscribed circle diameter (m)	PHI - Conflict (entry) angle (deg)	Exit only
1	3.50	4.90	6.7	10.0	46.0	55.0	
2	7.30	7.35	0.0	40.0	46.0	28.0	
3	3.65	11.40	24.8	34.0	46.0	23.0	
4	3.15	9.40	41.6	11.0	46.0	66.0	

### Slope / Intercept / Capacity

#### Roundabout Slope and Intercept used in model

Arm	Final slope	Final intercept (PCU/hr)
1	0.475	1136
2	0.747	2282
3	0.770	2381
4	0.608	1865

The slope and intercept shown above include any corrections and adjustments.

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D1	2019 Base DS1	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	50	100.000
2		ONE HOUR	✓	1407	100.000
3		ONE HOUR	✓	560	100.000
4		ONE HOUR	✓	865	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To				
	1	2	3	4	
From	1	0	19	20	11
	2	50	0	391	966
	3	35	372	0	153
	4	19	753	93	0

## Vehicle Mix

### Heavy Vehicle Percentages

	To				
	1	2	3	4	
From	1	0	5	5	27
	2	4	0	3	4
	3	9	0	0	1
	4	5	6	4	0

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.13	9.61	0.2	0.5	A	50	76
2	0.74	6.61	2.9	6.2	A	1341	2011
3	0.42	4.26	0.7	3.1	A	518	776
4	0.65	6.98	1.9	2.9	A	841	1262

### Main Results for each time segment

#### 07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	41	10	952	684	0.061	41	83	0.0	0.1	6.153	A
2	1100	275	99	2208	0.498	1096	894	0.0	1.0	3.347	A
3	425	106	805	1762	0.241	423	390	0.0	0.3	2.706	A
4	690	173	347	1654	0.417	687	881	0.0	0.8	3.936	A

**08:00 - 08:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	49	12	1139	595	0.083	49	99	0.1	0.1	7.251	A
2	1313	328	118	2194	0.599	1311	1070	1.0	1.5	4.227	A
3	507	127	963	1640	0.309	507	467	0.3	0.4	3.196	A
4	824	206	415	1613	0.511	823	1055	0.8	1.1	4.824	A

**08:15 - 08:30**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	61	15	1393	475	0.128	60	121	0.1	0.2	9.556	A
2	1609	402	145	2174	0.740	1603	1309	1.5	2.9	6.488	A
3	621	155	1177	1475	0.421	620	571	0.4	0.7	4.235	A
4	1010	252	508	1556	0.649	1006	1290	1.1	1.9	6.897	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	61	15	1397	473	0.128	61	121	0.2	0.2	9.606	A
2	1609	402	145	2174	0.740	1608	1312	2.9	2.9	6.608	A
3	621	155	1181	1472	0.422	621	572	0.7	0.7	4.259	A
4	1010	252	509	1556	0.649	1010	1294	1.9	1.9	6.984	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	49	12	1145	593	0.083	50	99	0.2	0.1	7.298	A
2	1313	328	119	2193	0.599	1319	1075	2.9	1.6	4.302	A
3	507	127	969	1636	0.310	508	469	0.7	0.5	3.217	A
4	824	206	416	1612	0.511	828	1060	1.9	1.1	4.885	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	41	10	957	682	0.061	42	83	0.1	0.1	6.188	A
2	1100	275	100	2208	0.498	1102	899	1.6	1.0	3.386	A
3	425	106	809	1758	0.241	425	392	0.5	0.3	2.722	A
4	690	173	348	1653	0.418	692	886	1.1	0.8	3.974	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.07	0.00	0.00	0.07	0.07			N/A	N/A
2	1.02	0.57	1.04	1.45	1.51			N/A	N/A
3	0.32	0.00	0.00	0.32	0.32			N/A	N/A
4	0.75	0.58	1.06	1.48	1.54			N/A	N/A



**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.10	0.00	0.00	0.10	0.10			N/A	N/A
2	1.53	0.05	0.49	3.92	6.15			N/A	N/A
3	0.45	0.00	0.00	0.45	0.45			N/A	N/A
4	1.10	0.07	0.86	2.04	2.87			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.16	0.03	0.29	0.51	0.54			N/A	N/A
2	2.88	0.03	0.29	2.88	4.98			N/A	N/A
3	0.73	0.03	0.26	0.73	0.73			N/A	N/A
4	1.92	0.03	0.28	1.92	1.92			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.16	0.03	0.28	0.50	0.52			N/A	N/A
2	2.91	0.03	0.28	2.91	2.91			N/A	N/A
3	0.73	0.03	0.29	1.11	3.07			N/A	N/A
4	1.94	0.03	0.28	1.94	1.94			N/A	N/A

**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.10	0.00	0.00	0.10	0.10			N/A	N/A
2	1.57	0.09	1.16	3.11	4.24			N/A	N/A
3	0.45	0.00	0.00	0.45	0.45			N/A	N/A
4	1.12	0.12	1.06	1.77	2.07			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.07	0.00	0.00	0.07	0.07			N/A	N/A
2	1.04	0.05	0.51	2.30	3.43			N/A	N/A
3	0.32	0.00	0.00	0.32	0.32			N/A	N/A
4	0.77	0.06	0.63	1.16	1.76			N/A	N/A

# 2019 Base DS1, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	6.43	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D2	2019 Base DS1	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	83	100.000
2		ONE HOUR	✓	1128	100.000
3		ONE HOUR	✓	747	100.000
4		ONE HOUR	✓	960	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	21	29	33
	2	4	0	352	772
	3	4	638	0	105
	4	3	866	91	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To			
		1	2	3	4
From	1	0	5	0	0
	2	0	0	1	2
	3	0	0	0	0
	4	33	1	0	0

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.31	17.75	0.4	1.5	C	77	116
2	0.58	4.08	1.4	2.0	A	1051	1576
3	0.49	4.17	0.9	1.9	A	685	1028
4	0.75	9.95	2.9	9.7	A	890	1335

### Main Results for each time segment

#### 16:45 - 17:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1203	565	0.112	63	9	0.0	0.1	7.244	A
2	862	216	114	2197	0.392	859	1151	0.0	0.7	2.728	A
3	562	141	617	1907	0.295	561	357	0.0	0.4	2.671	A
4	730	183	485	1570	0.465	727	693	0.0	0.9	4.296	A

#### 17:00 - 17:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	76	19	1439	453	0.167	75	11	0.1	0.2	9.639	A
2	1029	257	137	2180	0.472	1028	1378	0.7	0.9	3.170	A
3	672	168	738	1813	0.370	671	427	0.4	0.6	3.150	A
4	872	218	580	1512	0.577	870	829	0.9	1.4	5.646	A

#### 17:15 - 17:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	92	23	1759	301	0.307	92	13	0.2	0.4	17.330	C
2	1261	315	167	2157	0.584	1259	1683	0.9	1.4	4.057	A
3	822	206	903	1686	0.488	821	523	0.6	0.9	4.155	A
4	1068	267	710	1433	0.745	1062	1014	1.4	2.8	9.675	A

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	92	23	1766	298	0.311	92	13	0.4	0.4	17.749	C
2	1261	315	168	2157	0.585	1261	1690	1.4	1.4	4.078	A
3	822	206	905	1685	0.488	822	524	0.9	0.9	4.174	A
4	1068	267	711	1433	0.745	1068	1016	2.8	2.9	9.951	A

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	76	19	1449	448	0.169	76	11	0.4	0.2	9.830	A
2	1029	257	139	2179	0.472	1031	1387	1.4	0.9	3.190	A
3	672	168	741	1811	0.371	673	429	0.9	0.6	3.168	A
4	872	218	582	1511	0.577	878	832	2.9	1.4	5.799	A

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1210	562	0.113	64	9	0.2	0.1	7.323	A
2	862	216	116	2196	0.393	863	1158	0.9	0.7	2.745	A
3	562	141	620	1904	0.295	563	359	0.6	0.4	2.684	A
4	730	183	487	1569	0.465	732	696	1.4	0.9	4.357	A

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.13	0.00	0.00	0.13	0.13			N/A	N/A
2	0.65	0.56	1.02	1.42	1.47			N/A	N/A
3	0.42	0.00	0.00	0.42	0.42			N/A	N/A
4	0.87	0.56	1.01	1.41	1.47			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.20	0.00	0.00	0.20	0.20			N/A	N/A
2	0.90	0.07	0.80	1.56	1.96			N/A	N/A
3	0.59	0.07	0.74	1.35	1.42			N/A	N/A
4	1.36	0.05	0.62	3.23	4.83			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.44	0.03	0.26	0.47	0.50			N/A	N/A
2	1.41	0.03	0.26	1.41	1.41			N/A	N/A
3	0.94	0.03	0.25	0.94	0.94			N/A	N/A
4	2.84	0.03	0.29	2.84	9.73			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.45	0.03	0.34	1.39	1.54			N/A	N/A
2	1.42	0.03	0.27	1.42	1.42			N/A	N/A
3	0.95	0.03	0.27	0.95	1.95			N/A	N/A
4	2.90	0.03	0.28	2.90	3.79			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.21	0.00	0.00	0.21	0.21			N/A	N/A
2	0.92	0.52	1.01	1.44	1.49			N/A	N/A
3	0.59	0.55	1.00	1.40	1.45			N/A	N/A
4	1.40	0.07	0.90	3.02	4.34			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.13	0.00	0.00	0.13	0.13			N/A	N/A
2	0.66	0.09	0.82	1.38	1.46			N/A	N/A
3	0.42	0.00	0.00	0.42	0.42			N/A	N/A
4	0.89	0.04	0.41	2.03	3.35			N/A	N/A

# 2024 Base DS1, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	6.99	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D3	2024 Base DS1	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	52	100.000
2		ONE HOUR	✓	1457	100.000
3		ONE HOUR	✓	580	100.000
4		ONE HOUR	✓	896	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	20	21	11
	2	52	0	405	1000
	3	36	385	0	158
	4	20	780	96	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To				
		1	2	3	4	
From	1	0	5	5	27	
	2	4	0	3	4	
	3	9	0	0	1	
	4	5	6	4	0	

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.14	10.24	0.2	0.5	B	52	78
2	0.77	7.40	3.4	8.7	A	1388	2082
3	0.45	4.55	0.8	3.0	A	536	804
4	0.68	7.63	2.2	3.4	A	871	1307

### Main Results for each time segment

#### 07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	43	11	985	668	0.064	43	85	0.0	0.1	6.324	A
2	1139	285	102	2206	0.516	1134	925	0.0	1.1	3.475	A
3	440	110	833	1740	0.253	438	404	0.0	0.3	2.783	A
4	715	179	359	1647	0.434	712	912	0.0	0.8	4.067	A

#### 08:00 - 08:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	51	13	1179	576	0.089	51	102	0.1	0.1	7.538	A
2	1360	340	123	2191	0.621	1358	1108	1.1	1.7	4.474	A
3	525	131	997	1614	0.325	524	483	0.3	0.5	3.326	A
4	854	213	430	1604	0.532	852	1092	0.8	1.2	5.065	A

#### 08:15 - 08:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1442	451	0.139	62	125	0.1	0.2	10.173	B
2	1666	416	150	2170	0.767	1659	1355	1.7	3.3	7.219	A
3	643	161	1218	1443	0.445	642	590	0.5	0.8	4.514	A
4	1045	261	526	1546	0.676	1041	1335	1.2	2.2	7.513	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1447	449	0.140	63	125	0.2	0.2	10.243	B
2	1666	416	150	2170	0.768	1665	1359	3.3	3.4	7.399	A
3	643	161	1223	1440	0.447	643	593	0.8	0.8	4.549	A
4	1045	261	527	1545	0.677	1045	1339	2.2	2.2	7.633	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	51	13	1186	573	0.089	51	103	0.2	0.1	7.594	A
2	1360	340	123	2190	0.621	1366	1114	3.4	1.7	4.574	A
3	525	131	1004	1609	0.326	526	486	0.8	0.5	3.352	A
4	854	213	431	1603	0.533	857	1099	2.2	1.2	5.147	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	43	11	991	666	0.064	43	86	0.1	0.1	6.361	A
2	1139	285	103	2205	0.516	1141	931	1.7	1.1	3.520	A
3	440	110	838	1736	0.253	440	406	0.5	0.3	2.800	A
4	715	179	361	1646	0.434	716	918	1.2	0.8	4.114	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.07	0.00	0.00	0.07	0.07			N/A	N/A
2	1.10	0.57	1.04	1.45	1.51			N/A	N/A
3	0.34	0.00	0.00	0.34	0.34			N/A	N/A
4	0.81	0.58	1.06	1.48	1.54			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.11	0.00	0.00	0.11	0.11			N/A	N/A
2	1.68	0.05	0.47	4.41	7.12			N/A	N/A
3	0.48	0.00	0.00	0.48	0.48			N/A	N/A
4	1.19	0.07	0.83	2.46	3.43			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.18	0.03	0.29	0.51	0.54			N/A	N/A
2	3.31	0.03	0.29	3.31	8.69			N/A	N/A
3	0.80	0.03	0.26	0.80	0.80			N/A	N/A
4	2.16	0.03	0.29	2.16	2.90			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.18	0.03	0.28	0.50	0.52			N/A	N/A
2	3.37	0.03	0.28	3.37	3.37			N/A	N/A
3	0.81	0.03	0.28	0.86	3.04			N/A	N/A
4	2.19	0.03	0.28	2.19	2.19			N/A	N/A



**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.11	0.00	0.00	0.11	0.11			N/A	N/A
2	1.72	0.08	1.10	3.86	5.37			N/A	N/A
3	0.49	0.00	0.00	0.49	0.49			N/A	N/A
4	1.22	0.10	1.07	2.04	2.76			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.08	0.00	0.00	0.08	0.08			N/A	N/A
2	1.12	0.05	0.46	2.72	4.19			N/A	N/A
3	0.34	0.00	0.00	0.34	0.34			N/A	N/A
4	0.82	0.05	0.54	1.57	2.08			N/A	N/A

# 2024 Base DS1, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	7.27	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D4	2024 Base DS1	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	86	100.000
2		ONE HOUR	✓	1170	100.000
3		ONE HOUR	✓	774	100.000
4		ONE HOUR	✓	995	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	22	30	34
	2	4	0	365	800
	3	4	661	0	109
	4	3	898	94	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To			
		1	2	3	4
From	1	0	5	0	0
	2	0	0	1	2
	3	0	0	0	0
	4	33	1	0	0

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.36	21.29	0.6	2.1	C	80	120
2	0.61	4.32	1.6	2.5	A	1089	1634
3	0.51	4.46	1.1	1.6	A	711	1066
4	0.78	11.70	3.5	15.0	B	923	1384

### Main Results for each time segment

#### 16:45 - 17:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	66	16	1247	544	0.120	65	9	0.0	0.1	7.596	A
2	894	223	119	2194	0.407	891	1193	0.0	0.7	2.799	A
3	583	146	639	1889	0.309	581	370	0.0	0.4	2.749	A
4	757	189	503	1559	0.486	753	718	0.0	0.9	4.492	A

#### 17:00 - 17:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	78	20	1492	428	0.183	78	11	0.1	0.2	10.409	B
2	1067	267	142	2176	0.490	1066	1428	0.7	1.0	3.289	A
3	696	174	765	1792	0.388	696	443	0.4	0.6	3.281	A
4	904	226	601	1499	0.603	902	859	0.9	1.5	6.064	A

#### 17:15 - 17:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	96	24	1822	271	0.354	95	14	0.2	0.5	20.529	C
2	1307	327	173	2153	0.607	1305	1744	1.0	1.5	4.295	A
3	853	213	936	1661	0.513	851	542	0.6	1.0	4.438	A
4	1107	277	736	1418	0.781	1100	1051	1.5	3.4	11.179	B

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	96	24	1831	267	0.359	96	14	0.5	0.6	21.286	C
2	1307	327	175	2152	0.607	1307	1752	1.5	1.6	4.325	A
3	853	213	938	1659	0.514	853	543	1.0	1.1	4.464	A
4	1107	277	737	1417	0.782	1107	1054	3.4	3.5	11.701	B

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	78	20	1504	422	0.186	80	11	0.6	0.2	10.684	B
2	1067	267	144	2175	0.491	1070	1439	1.6	1.0	3.315	A
3	696	174	768	1790	0.389	698	446	1.1	0.6	3.303	A
4	904	226	604	1498	0.603	912	863	3.5	1.6	6.286	A

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	66	16	1255	540	0.121	66	9	0.2	0.1	7.687	A
2	894	223	120	2193	0.408	895	1201	1.0	0.7	2.817	A
3	583	146	643	1887	0.309	584	372	0.6	0.4	2.764	A
4	757	189	505	1558	0.486	760	721	1.6	1.0	4.568	A

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.14	0.00	0.00	0.14	0.14			N/A	N/A
2	0.69	0.56	1.02	1.42	1.47			N/A	N/A
3	0.44	0.00	0.00	0.44	0.44			N/A	N/A
4	0.94	0.56	1.01	1.41	1.47			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.22	0.00	0.00	0.22	0.22			N/A	N/A
2	0.97	0.06	0.78	1.81	2.46			N/A	N/A
3	0.63	0.08	0.76	1.36	1.43			N/A	N/A
4	1.51	0.05	0.52	3.79	5.82			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.54	0.03	0.27	0.54	0.54			N/A	N/A
2	1.55	0.03	0.26	1.55	1.55			N/A	N/A
3	1.05	0.03	0.26	1.05	1.05			N/A	N/A
4	3.42	0.03	0.30	3.42	15.03			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.56	0.03	0.34	1.16	2.11			N/A	N/A
2	1.56	0.03	0.27	1.56	1.56			N/A	N/A
3	1.05	0.03	0.27	1.05	1.63			N/A	N/A
4	3.51	0.03	0.28	3.51	7.27			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.23	0.00	0.00	0.23	0.23			N/A	N/A
2	0.99	0.45	1.02	1.34	1.34			N/A	N/A
3	0.64	0.55	1.00	1.40	1.45			N/A	N/A
4	1.56	0.06	0.74	3.80	5.64			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.14	0.03	0.25	0.46	0.48			N/A	N/A
2	0.70	0.08	0.81	1.40	1.47			N/A	N/A
3	0.45	0.03	0.34	1.13	1.31			N/A	N/A
4	0.96	0.04	0.38	2.39	4.16			N/A	N/A

# 2024 Base + Dev DS1, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	7.27	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D5	2024 Base + Dev DS1	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	52	100.000
2		ONE HOUR	✓	1477	100.000
3		ONE HOUR	✓	586	100.000
4		ONE HOUR	✓	909	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	20	21	11
	2	52	0	410	1014
	3	36	392	0	158
	4	20	793	96	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To			
		1	2	3	4
From	1	0	5	5	27
	2	4	0	3	4
	3	9	0	0	1
	4	5	6	4	0

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.14	10.53	0.2	0.5	B	53	79
2	0.78	7.74	3.6	10.4	A	1407	2110
3	0.46	4.66	0.8	3.0	A	542	813
4	0.69	7.94	2.3	3.8	A	884	1325

### Main Results for each time segment

#### 07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	43	11	1000	661	0.065	43	86	0.0	0.1	6.396	A
2	1154	289	102	2206	0.523	1150	941	0.0	1.1	3.524	A
3	445	111	844	1732	0.257	443	408	0.0	0.3	2.812	A
4	725	181	365	1643	0.441	722	923	0.0	0.8	4.122	A

#### 08:00 - 08:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	52	13	1197	568	0.091	51	103	0.1	0.1	7.664	A
2	1378	345	123	2191	0.629	1376	1126	1.1	1.7	4.571	A
3	531	133	1010	1604	0.331	530	488	0.3	0.5	3.375	A
4	866	216	436	1600	0.541	864	1104	0.8	1.2	5.171	A

#### 08:15 - 08:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1464	441	0.143	63	126	0.1	0.2	10.456	B
2	1688	422	150	2170	0.778	1681	1377	1.7	3.5	7.525	A
3	650	163	1234	1431	0.454	649	597	0.5	0.8	4.627	A
4	1060	265	534	1541	0.688	1056	1350	1.2	2.3	7.802	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1469	439	0.144	63	126	0.2	0.2	10.535	B
2	1688	422	150	2170	0.778	1688	1381	3.5	3.6	7.736	A
3	650	163	1239	1427	0.456	650	599	0.8	0.8	4.664	A
4	1060	265	535	1540	0.689	1060	1355	2.3	2.3	7.941	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	52	13	1204	564	0.091	52	103	0.2	0.1	7.725	A
2	1378	345	123	2190	0.629	1385	1133	3.6	1.8	4.684	A
3	531	133	1017	1598	0.332	532	492	0.8	0.5	3.404	A
4	866	216	438	1599	0.541	870	1112	2.3	1.3	5.260	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	43	11	1006	658	0.066	43	86	0.1	0.1	6.435	A
2	1154	289	103	2205	0.523	1157	947	1.8	1.1	3.571	A
3	445	111	849	1728	0.257	445	411	0.5	0.4	2.828	A
4	725	181	366	1642	0.441	727	928	1.3	0.8	4.171	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.08	0.00	0.00	0.08	0.08			N/A	N/A
2	1.13	0.57	1.04	1.45	1.50			N/A	N/A
3	0.35	0.00	0.00	0.35	0.35			N/A	N/A
4	0.83	0.58	1.06	1.48	1.54			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.11	0.00	0.00	0.11	0.11			N/A	N/A
2	1.74	0.05	0.47	4.61	7.51			N/A	N/A
3	0.50	0.05	0.45	1.28	1.40			N/A	N/A
4	1.23	0.06	0.80	2.65	3.74			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.18	0.03	0.29	0.51	0.54			N/A	N/A
2	3.50	0.03	0.29	3.50	10.38			N/A	N/A
3	0.83	0.03	0.26	0.83	0.83			N/A	N/A
4	2.28	0.03	0.29	2.28	3.79			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.18	0.03	0.28	0.50	0.52			N/A	N/A
2	3.57	0.03	0.28	3.57	3.57			N/A	N/A
3	0.84	0.03	0.28	0.84	3.00			N/A	N/A
4	2.31	0.03	0.28	2.31	2.31			N/A	N/A



**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.11	0.00	0.00	0.11	0.11			N/A	N/A
2	1.79	0.07	1.06	4.10	5.87			N/A	N/A
3	0.50	0.50	1.01	1.41	1.46			N/A	N/A
4	1.27	0.09	1.07	2.21	2.99			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.08	0.00	0.00	0.08	0.08			N/A	N/A
2	1.15	0.04	0.45	2.84	4.56			N/A	N/A
3	0.35	0.00	0.00	0.35	0.35			N/A	N/A
4	0.84	0.05	0.52	1.70	2.36			N/A	N/A

# 2024 Base + Dev DS1, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	7.73	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D6	2024 Base + Dev DS1	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	86	100.000
2		ONE HOUR	✓	1193	100.000
3		ONE HOUR	✓	786	100.000
4		ONE HOUR	✓	1011	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	22	30	34
	2	4	0	372	817
	3	4	673	0	109
	4	3	913	94	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To			
		1	2	3	4
From	1	0	5	0	0
	2	0	0	1	2
	3	0	0	0	0
	4	33	1	0	0

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.38	23.20	0.6	2.5	C	80	120
2	0.62	4.46	1.6	2.7	A	1111	1667
3	0.53	4.61	1.1	1.5	A	721	1081
4	0.80	12.68	3.8	17.7	B	937	1405

### Main Results for each time segment

#### 16:45 - 17:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	66	16	1266	535	0.123	65	9	0.0	0.1	7.750	A
2	912	228	119	2194	0.416	909	1213	0.0	0.7	2.838	A
3	592	148	652	1880	0.315	590	376	0.0	0.5	2.787	A
4	769	192	511	1554	0.495	765	730	0.0	1.0	4.583	A

#### 17:00 - 17:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	79	20	1516	416	0.189	78	11	0.1	0.2	10.761	B
2	1089	272	142	2176	0.500	1088	1452	0.7	1.0	3.353	A
3	706	177	780	1781	0.397	706	450	0.5	0.7	3.346	A
4	918	229	612	1493	0.615	915	874	1.0	1.6	6.267	A

#### 17:15 - 17:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	96	24	1850	258	0.374	95	14	0.2	0.6	22.207	C
2	1333	333	173	2153	0.619	1331	1772	1.0	1.6	4.430	A
3	865	216	954	1647	0.525	863	550	0.7	1.1	4.584	A
4	1124	281	748	1410	0.797	1115	1069	1.6	3.7	12.005	B

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	96	24	1860	253	0.381	96	14	0.6	0.6	23.197	C
2	1333	333	175	2152	0.620	1333	1781	1.6	1.6	4.463	A
3	865	216	956	1645	0.526	865	552	1.1	1.1	4.614	A
4	1124	281	750	1409	0.798	1124	1072	3.7	3.8	12.677	B

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	79	20	1529	410	0.192	80	11	0.6	0.2	11.086	B
2	1089	272	144	2174	0.501	1091	1465	1.6	1.0	3.382	A
3	706	177	783	1778	0.397	708	452	1.1	0.7	3.368	A
4	918	229	614	1492	0.615	927	878	3.8	1.6	6.530	A

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	66	16	1275	531	0.124	66	9	0.2	0.1	7.852	A
2	912	228	120	2193	0.416	913	1221	1.0	0.7	2.856	A
3	592	148	655	1877	0.315	592	378	0.7	0.5	2.803	A
4	769	192	513	1553	0.495	771	734	1.6	1.0	4.667	A

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.14	0.00	0.00	0.14	0.14			N/A	N/A
2	0.72	0.56	1.01	1.42	1.47			N/A	N/A
3	0.46	0.00	0.00	0.46	0.46			N/A	N/A
4	0.98	0.56	1.01	1.41	1.46			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.23	0.00	0.00	0.23	0.23			N/A	N/A
2	1.01	0.06	0.76	1.92	2.72			N/A	N/A
3	0.65	0.08	0.76	1.36	1.44			N/A	N/A
4	1.58	0.05	0.50	4.01	6.26			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.58	0.03	0.27	0.58	0.61			N/A	N/A
2	1.63	0.03	0.26	1.63	1.63			N/A	N/A
3	1.10	0.03	0.26	1.10	1.10			N/A	N/A
4	3.73	0.03	0.31	4.40	17.67			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.61	0.03	0.35	1.35	2.48			N/A	N/A
2	1.64	0.03	0.27	1.64	1.64			N/A	N/A
3	1.10	0.03	0.27	1.10	1.49			N/A	N/A
4	3.85	0.03	0.28	3.85	9.70			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.24	0.03	0.25	0.46	0.48			N/A	N/A
2	1.03	0.36	1.04	1.14	1.60			N/A	N/A
3	0.66	0.55	1.00	1.40	1.45			N/A	N/A
4	1.64	0.05	0.64	4.10	6.24			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.14	0.03	0.25	0.46	0.48			N/A	N/A
2	0.73	0.08	0.80	1.42	1.50			N/A	N/A
3	0.46	0.04	0.38	1.20	1.35			N/A	N/A
4	1.00	0.04	0.37	2.48	4.56			N/A	N/A

# 2019 Base DS2, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	5.29	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D10	2019 Base DS2	AM	with Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	50	100.000
2		ONE HOUR	✓	1341	100.000
3		ONE HOUR	✓	265	100.000
4		ONE HOUR	✓	840	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	19	20	11
	2	38	0	253	1050
	3	35	128	0	101
	4	19	746	75	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To			
		1	2	3	4
From	1	0	5	5	27
	2	4	0	3	4
	3	9	0	0	1
	4	5	6	4	0

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.10	7.15	0.1	0.5	A	50	76
2	0.70	5.72	2.4	5.0	A	1280	1920
3	0.21	3.28	0.3	0.9	A	246	369
4	0.57	5.11	1.4	1.7	A	817	1226

### Main Results for each time segment

#### 07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	41	10	749	781	0.053	41	74	0.0	0.1	5.354	A
2	1050	262	85	2219	0.473	1046	705	0.0	0.9	3.180	A
3	202	50	862	1718	0.118	201	269	0.0	0.1	2.406	A
4	670	168	155	1771	0.379	668	908	0.0	0.6	3.454	A

#### 08:00 - 08:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	49	12	897	710	0.070	49	88	0.1	0.1	5.989	A
2	1254	313	102	2206	0.568	1252	844	0.9	1.4	3.914	A
3	241	60	1031	1588	0.152	241	322	0.1	0.2	2.710	A
4	800	200	185	1752	0.457	799	1087	0.6	0.9	4.001	A

#### 08:15 - 08:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	61	15	1097	615	0.098	60	108	0.1	0.1	7.136	A
2	1535	384	124	2189	0.701	1531	1033	1.4	2.4	5.651	A
3	295	74	1261	1410	0.209	295	394	0.2	0.3	3.272	A
4	980	245	227	1727	0.568	978	1330	0.9	1.4	5.084	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	61	15	1099	614	0.099	61	108	0.1	0.1	7.151	A
2	1535	384	125	2189	0.701	1535	1035	2.4	2.4	5.722	A
3	295	74	1265	1408	0.210	295	395	0.3	0.3	3.279	A
4	980	245	227	1727	0.568	980	1333	1.4	1.4	5.112	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	49	12	900	709	0.070	50	88	0.1	0.1	6.008	A
2	1254	313	102	2206	0.568	1258	847	2.4	1.4	3.965	A
3	241	60	1036	1584	0.152	241	324	0.3	0.2	2.721	A
4	800	200	186	1752	0.457	802	1092	1.4	0.9	4.028	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	41	10	753	779	0.053	41	74	0.1	0.1	5.370	A
2	1050	262	85	2219	0.473	1052	709	1.4	0.9	3.211	A
3	202	50	866	1715	0.118	202	271	0.2	0.1	2.414	A
4	670	168	155	1771	0.379	671	913	0.9	0.7	3.475	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.06	0.00	0.00	0.06	0.06			N/A	N/A
2	0.93	0.57	1.04	1.46	1.51			N/A	N/A
3	0.13	0.00	0.00	0.13	0.13			N/A	N/A
4	0.64	0.58	1.06	1.48	1.54			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.08	0.03	0.28	0.50	0.53			N/A	N/A
2	1.35	0.05	0.53	3.26	4.96			N/A	N/A
3	0.18	0.00	0.00	0.18	0.18			N/A	N/A
4	0.88	0.09	0.89	1.18	1.71			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.12	0.03	0.29	0.51	0.54			N/A	N/A
2	2.39	0.03	0.28	2.39	2.39			N/A	N/A
3	0.27	0.03	0.26	0.46	0.49			N/A	N/A
4	1.37	0.03	0.27	1.37	1.37			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.12	0.03	0.28	0.50	0.52			N/A	N/A
2	2.42	0.03	0.27	2.42	2.42			N/A	N/A
3	0.27	0.03	0.28	0.50	0.92			N/A	N/A
4	1.38	0.03	0.28	1.38	1.38			N/A	N/A



**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.08	0.00	0.00	0.08	0.08			N/A	N/A
2	1.38	0.12	1.19	2.39	3.02			N/A	N/A
3	0.18	0.00	0.00	0.18	0.18			N/A	N/A
4	0.90	0.36	1.03	1.49	1.55			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.06	0.00	0.00	0.06	0.06			N/A	N/A
2	0.94	0.06	0.70	1.81	2.48			N/A	N/A
3	0.14	0.00	0.00	0.14	0.14			N/A	N/A
4	0.65	0.07	0.77	1.43	1.51			N/A	N/A

# 2019 Base DS2, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	4.11	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D11	2019 Base DS2	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	83	100.000
2		ONE HOUR	✓	1104	100.000
3		ONE HOUR	✓	279	100.000
4		ONE HOUR	✓	850	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	21	29	33
	2	4	0	266	834
	3	4	172	0	104
	4	3	775	72	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To				
		1	2	3	4	
From	1	0	5	0	0	
	2	0	0	1	2	
	3	0	0	0	0	
	4	33	1	0	0	

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.15	7.18	0.2	0.5	A	77	116
2	0.57	3.90	1.3	1.8	A	1029	1543
3	0.19	2.72	0.2	0.5	A	256	384
4	0.54	4.55	1.2	1.5	A	788	1182

### Main Results for each time segment

#### 16:45 - 17:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	770	771	0.082	63	9	0.0	0.1	5.146	A
2	844	211	100	2207	0.382	842	733	0.0	0.6	2.672	A
3	210	53	665	1870	0.112	210	277	0.0	0.1	2.168	A
4	647	162	135	1783	0.363	644	739	0.0	0.6	3.188	A

#### 17:00 - 17:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	76	19	922	698	0.108	75	11	0.1	0.1	5.845	A
2	1008	252	120	2193	0.460	1007	877	0.6	0.9	3.080	A
3	251	63	795	1769	0.142	251	332	0.1	0.2	2.370	A
4	772	193	161	1767	0.437	771	885	0.6	0.8	3.650	A

#### 17:15 - 17:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	92	23	1128	600	0.154	92	13	0.1	0.2	7.167	A
2	1235	309	147	2173	0.568	1233	1074	0.9	1.3	3.881	A
3	307	77	973	1632	0.188	307	406	0.2	0.2	2.716	A
4	946	236	197	1745	0.542	944	1083	0.8	1.2	4.534	A

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	92	23	1130	600	0.154	92	13	0.2	0.2	7.184	A
2	1235	309	147	2172	0.568	1235	1075	1.3	1.3	3.897	A
3	307	77	975	1631	0.188	307	407	0.2	0.2	2.719	A
4	946	236	198	1745	0.542	946	1084	1.2	1.2	4.552	A

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	76	19	925	697	0.108	76	11	0.2	0.1	5.864	A
2	1008	252	120	2192	0.460	1010	880	1.3	0.9	3.098	A
3	251	63	798	1767	0.142	251	333	0.2	0.2	2.376	A
4	772	193	162	1767	0.437	774	887	1.2	0.8	3.671	A

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	774	769	0.082	63	9	0.1	0.1	5.166	A
2	844	211	101	2207	0.382	845	736	0.9	0.6	2.687	A
3	210	53	667	1868	0.112	210	278	0.2	0.1	2.171	A
4	647	162	135	1783	0.363	648	742	0.8	0.6	3.209	A

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.09	0.00	0.00	0.09	0.09			N/A	N/A
2	0.63	0.56	1.02	1.42	1.47			N/A	N/A
3	0.13	0.00	0.00	0.13	0.13			N/A	N/A
4	0.57	0.56	1.01	1.41	1.47			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.12	0.00	0.00	0.12	0.12			N/A	N/A
2	0.86	0.07	0.81	1.36	1.80			N/A	N/A
3	0.16	0.00	0.00	0.16	0.16			N/A	N/A
4	0.78	0.09	0.83	1.19	1.19			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.18	0.03	0.26	0.47	0.49			N/A	N/A
2	1.32	0.03	0.26	1.32	1.32			N/A	N/A
3	0.23	0.03	0.25	0.46	0.48			N/A	N/A
4	1.18	0.03	0.26	1.18	1.18			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.18	0.03	0.25	0.46	0.48			N/A	N/A
2	1.33	0.03	0.27	1.33	1.33			N/A	N/A
3	0.23	0.03	0.25	0.45	0.48			N/A	N/A
4	1.19	0.03	0.27	1.19	1.19			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.12	0.00	0.00	0.12	0.12			N/A	N/A
2	0.87	0.54	1.01	1.42	1.48			N/A	N/A
3	0.17	0.00	0.00	0.17	0.17			N/A	N/A
4	0.79	0.52	0.99	1.41	1.46			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.09	0.00	0.00	0.09	0.09			N/A	N/A
2	0.63	0.09	0.82	1.38	1.45			N/A	N/A
3	0.13	0.00	0.00	0.13	0.13			N/A	N/A
4	0.58	0.07	0.73	1.36	1.44			N/A	N/A

# 2024 Base DS2, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	5.70	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D12	2024 Base DS2	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	52	100.000
2		ONE HOUR	✓	1389	100.000
3		ONE HOUR	✓	274	100.000
4		ONE HOUR	✓	869	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	20	21	11
	2	40	0	262	1087
	3	36	133	0	105
	4	20	772	78	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To			
		1	2	3	4
From	1	0	5	5	27
	2	4	0	3	4
	3	9	0	0	1
	4	5	6	4	0

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.11	7.43	0.1	0.5	A	52	78
2	0.73	6.27	2.7	5.8	A	1325	1987
3	0.22	3.42	0.3	1.2	A	255	382
4	0.59	5.40	1.5	1.9	A	846	1269

### Main Results for each time segment

#### 07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	43	11	775	768	0.056	43	76	0.0	0.1	5.457	A
2	1087	272	88	2217	0.490	1083	730	0.0	1.0	3.291	A
3	209	52	892	1695	0.123	208	279	0.0	0.1	2.456	A
4	694	174	160	1768	0.393	691	940	0.0	0.7	3.538	A

#### 08:00 - 08:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	51	13	928	695	0.074	51	91	0.1	0.1	6.145	A
2	1298	325	105	2204	0.589	1296	874	1.0	1.5	4.116	A
3	250	62	1068	1560	0.160	249	334	0.1	0.2	2.785	A
4	829	207	192	1749	0.474	828	1125	0.7	0.9	4.143	A

#### 08:15 - 08:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1136	597	0.105	63	111	0.1	0.1	7.410	A
2	1590	397	129	2186	0.727	1585	1070	1.5	2.7	6.175	A
3	306	76	1305	1376	0.222	305	408	0.2	0.3	3.407	A
4	1015	254	235	1722	0.589	1013	1376	0.9	1.5	5.362	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1138	596	0.105	63	112	0.1	0.1	7.428	A
2	1590	397	129	2186	0.727	1590	1072	2.7	2.7	6.272	A
3	306	76	1309	1373	0.223	306	409	0.3	0.3	3.417	A
4	1015	254	235	1722	0.589	1015	1380	1.5	1.5	5.398	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	51	13	932	694	0.074	51	91	0.1	0.1	6.167	A
2	1298	325	106	2203	0.589	1303	877	2.7	1.5	4.179	A
3	250	62	1073	1555	0.161	250	335	0.3	0.2	2.796	A
4	829	207	192	1748	0.474	831	1131	1.5	1.0	4.173	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	43	11	779	766	0.056	43	77	0.1	0.1	5.478	A
2	1087	272	88	2216	0.491	1089	734	1.5	1.0	3.328	A
3	209	52	897	1691	0.124	209	280	0.2	0.1	2.465	A
4	694	174	161	1767	0.393	695	945	1.0	0.7	3.566	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.06	0.00	0.00	0.06	0.06			N/A	N/A
2	0.99	0.57	1.04	1.46	1.51			N/A	N/A
3	0.14	0.00	0.00	0.14	0.14			N/A	N/A
4	0.68	0.58	1.06	1.48	1.54			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.09	0.03	0.29	0.52	0.55			N/A	N/A
2	1.47	0.05	0.50	3.72	5.78			N/A	N/A
3	0.19	0.00	0.00	0.19	0.19			N/A	N/A
4	0.95	0.08	0.89	1.54	1.95			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.13	0.03	0.29	0.51	0.54			N/A	N/A
2	2.71	0.03	0.28	2.71	3.66			N/A	N/A
3	0.29	0.03	0.26	0.46	0.49			N/A	N/A
4	1.50	0.03	0.28	1.50	1.50			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.13	0.03	0.28	0.50	0.52			N/A	N/A
2	2.74	0.03	0.27	2.74	2.74			N/A	N/A
3	0.29	0.03	0.29	0.79	1.16			N/A	N/A
4	1.51	0.03	0.28	1.51	1.51			N/A	N/A



**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.09	0.00	0.00	0.09	0.09			N/A	N/A
2	1.51	0.10	1.18	2.90	3.86			N/A	N/A
3	0.19	0.00	0.00	0.19	0.19			N/A	N/A
4	0.96	0.27	1.04	1.25	1.25			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.07	0.00	0.00	0.07	0.07			N/A	N/A
2	1.01	0.05	0.57	2.07	3.05			N/A	N/A
3	0.14	0.00	0.00	0.14	0.14			N/A	N/A
4	0.69	0.07	0.77	1.45	1.53			N/A	N/A

# 2024 Base DS2, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	4.33	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D13	2024 Base DS2	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	86	100.000
2		ONE HOUR	✓	1145	100.000
3		ONE HOUR	✓	289	100.000
4		ONE HOUR	✓	881	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	22	30	34
	2	4	0	276	865
	3	4	178	0	107
	4	3	804	74	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To			
		1	2	3	4
From	1	0	5	0	0
	2	0	0	1	2
	3	0	0	0	0
	4	33	1	0	0

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.17	7.53	0.2	0.5	A	80	120
2	0.59	4.11	1.5	2.0	A	1067	1600
3	0.20	2.80	0.2	0.5	A	265	398
4	0.56	4.79	1.3	1.6	A	817	1226

### Main Results for each time segment

#### 16:45 - 17:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	66	16	798	757	0.087	65	9	0.0	0.1	5.264	A
2	875	219	104	2205	0.397	873	760	0.0	0.7	2.738	A
3	218	54	689	1851	0.118	217	287	0.0	0.1	2.203	A
4	670	168	140	1780	0.377	668	766	0.0	0.6	3.265	A

#### 17:00 - 17:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	78	20	956	682	0.115	78	11	0.1	0.1	6.028	A
2	1045	261	124	2189	0.477	1044	909	0.7	0.9	3.189	A
3	260	65	824	1747	0.149	260	344	0.1	0.2	2.421	A
4	801	200	167	1763	0.454	800	917	0.6	0.8	3.772	A

#### 17:15 - 17:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	96	24	1170	581	0.165	96	14	0.1	0.2	7.508	A
2	1280	320	152	2169	0.590	1278	1113	0.9	1.4	4.094	A
3	319	80	1009	1605	0.199	318	421	0.2	0.2	2.798	A
4	981	245	205	1741	0.563	979	1123	0.8	1.3	4.764	A

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	96	24	1172	580	0.165	96	14	0.2	0.2	7.528	A
2	1280	320	153	2168	0.590	1280	1115	1.4	1.5	4.114	A
3	319	80	1011	1603	0.199	319	422	0.2	0.2	2.801	A
4	981	245	205	1740	0.563	981	1124	1.3	1.3	4.787	A

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	78	20	959	681	0.115	79	11	0.2	0.1	6.052	A
2	1045	261	125	2189	0.477	1047	912	1.5	0.9	3.206	A
3	260	65	827	1745	0.149	260	345	0.2	0.2	2.425	A
4	801	200	168	1763	0.454	802	920	1.3	0.8	3.796	A

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	66	16	802	755	0.087	66	9	0.1	0.1	5.286	A
2	875	219	105	2204	0.397	876	763	0.9	0.7	2.754	A
3	218	54	692	1849	0.118	218	289	0.2	0.1	2.209	A
4	670	168	140	1780	0.377	671	770	0.8	0.6	3.287	A

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.10	0.00	0.00	0.10	0.10			N/A	N/A
2	0.67	0.56	1.02	1.42	1.47			N/A	N/A
3	0.13	0.00	0.00	0.13	0.13			N/A	N/A
4	0.61	0.56	1.01	1.41	1.47			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.13	0.00	0.00	0.13	0.13			N/A	N/A
2	0.92	0.07	0.79	1.64	2.02			N/A	N/A
3	0.17	0.00	0.00	0.17	0.17			N/A	N/A
4	0.83	0.08	0.84	1.09	1.61			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.20	0.03	0.26	0.47	0.49			N/A	N/A
2	1.45	0.03	0.26	1.45	1.45			N/A	N/A
3	0.25	0.03	0.25	0.46	0.48			N/A	N/A
4	1.29	0.03	0.26	1.29	1.29			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.20	0.03	0.26	0.46	0.49			N/A	N/A
2	1.45	0.03	0.27	1.45	1.45			N/A	N/A
3	0.25	0.03	0.26	0.47	0.49			N/A	N/A
4	1.30	0.03	0.27	1.30	1.30			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.13	0.00	0.00	0.13	0.13			N/A	N/A
2	0.93	0.52	1.01	1.45	1.50			N/A	N/A
3	0.18	0.00	0.00	0.18	0.18			N/A	N/A
4	0.85	0.44	0.98	1.42	1.47			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.10	0.00	0.00	0.10	0.10			N/A	N/A
2	0.67	0.09	0.82	1.39	1.46			N/A	N/A
3	0.13	0.00	0.00	0.13	0.13			N/A	N/A
4	0.61	0.07	0.75	1.36	1.44			N/A	N/A

# 2024 Base + Dev DS2, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	5.87	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D14	2024 Base + Dev DS2	AM	without Stubbington Bypass	ONE HOUR	07:45	09:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	52	100.000
2		ONE HOUR	✓	1404	100.000
3		ONE HOUR	✓	277	100.000
4		ONE HOUR	✓	888	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	20	21	11
	2	40	0	265	1099
	3	36	136	0	105
	4	20	791	78	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To				
		1	2	3	4	
From	1	0	5	5	27	
	2	4	0	3	4	
	3	9	0	0	1	
	4	5	6	4	0	

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.11	7.59	0.1	0.5	A	53	79
2	0.73	6.45	2.8	6.0	A	1339	2008
3	0.23	3.46	0.3	1.2	A	258	387
4	0.60	5.57	1.6	2.1	A	863	1294

### Main Results for each time segment

#### 07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	43	11	792	760	0.057	43	76	0.0	0.1	5.514	A
2	1099	275	88	2217	0.496	1094	747	0.0	1.0	3.321	A
3	211	53	901	1688	0.125	211	281	0.0	0.1	2.469	A
4	708	177	163	1766	0.401	705	949	0.0	0.7	3.586	A

#### 08:00 - 08:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	52	13	948	686	0.075	52	92	0.1	0.1	6.234	A
2	1312	328	105	2204	0.595	1310	894	1.0	1.5	4.176	A
3	252	63	1079	1551	0.163	252	336	0.1	0.2	2.809	A
4	845	211	195	1747	0.484	844	1136	0.7	1.0	4.221	A

#### 08:15 - 08:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1160	586	0.108	63	112	0.1	0.1	7.571	A
2	1607	402	129	2186	0.735	1601	1094	1.5	2.8	6.340	A
3	309	77	1319	1366	0.226	309	411	0.2	0.3	3.451	A
4	1035	259	238	1720	0.602	1033	1389	1.0	1.6	5.532	A

**08:30 - 08:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	63	16	1162	584	0.108	63	112	0.1	0.1	7.591	A
2	1607	402	129	2186	0.735	1606	1096	2.8	2.8	6.451	A
3	309	77	1323	1363	0.227	309	412	0.3	0.3	3.462	A
4	1035	259	239	1720	0.602	1035	1393	1.6	1.6	5.571	A

**08:45 - 09:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	52	13	951	684	0.075	52	92	0.1	0.1	6.257	A
2	1312	328	106	2203	0.595	1317	898	2.8	1.5	4.246	A
3	252	63	1085	1546	0.163	253	338	0.3	0.2	2.823	A
4	845	211	195	1746	0.484	848	1142	1.6	1.0	4.256	A

**09:00 - 09:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	43	11	796	758	0.057	43	77	0.1	0.1	5.534	A
2	1099	275	88	2216	0.496	1101	751	1.5	1.0	3.361	A
3	211	53	906	1684	0.126	212	283	0.2	0.1	2.479	A
4	708	177	164	1766	0.401	709	954	1.0	0.7	3.612	A

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.07	0.00	0.00	0.07	0.07			N/A	N/A
2	1.01	0.57	1.04	1.45	1.51			N/A	N/A
3	0.14	0.00	0.00	0.14	0.14			N/A	N/A
4	0.70	0.58	1.06	1.48	1.54			N/A	N/A

**08:00 - 08:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.09	0.03	0.29	0.51	0.54			N/A	N/A
2	1.51	0.05	0.49	3.85	6.02			N/A	N/A
3	0.20	0.00	0.00	0.20	0.20			N/A	N/A
4	0.99	0.08	0.89	1.69	2.07			N/A	N/A

**08:15 - 08:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.13	0.03	0.29	0.51	0.54			N/A	N/A
2	2.81	0.03	0.28	2.81	4.39			N/A	N/A
3	0.30	0.03	0.26	0.46	0.49			N/A	N/A
4	1.58	0.03	0.28	1.58	1.58			N/A	N/A

**08:30 - 08:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.13	0.03	0.27	0.49	0.52			N/A	N/A
2	2.84	0.03	0.27	2.84	2.84			N/A	N/A
3	0.30	0.03	0.30	0.87	1.20			N/A	N/A
4	1.59	0.03	0.28	1.59	1.59			N/A	N/A



**08:45 - 09:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.09	0.00	0.00	0.09	0.09			N/A	N/A
2	1.55	0.09	1.17	3.04	4.08			N/A	N/A
3	0.20	0.00	0.00	0.20	0.20			N/A	N/A
4	1.00	0.23	1.05	1.58	1.58			N/A	N/A

**09:00 - 09:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.07	0.00	0.00	0.07	0.07			N/A	N/A
2	1.03	0.05	0.52	2.21	3.27			N/A	N/A
3	0.15	0.00	0.00	0.15	0.15			N/A	N/A
4	0.71	0.07	0.76	1.47	1.56			N/A	N/A

# 2024 Base + Dev DS2, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Geometry	Arm 4 - Roundabout Geometry	Effective flare length is over 30m, which is outside the normal range. Treat capacities with increasing caution.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	NGL - Longfield Avenue	Standard Roundabout		1, 2, 3, 4	4.45	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D15	2024 Base + Dev DS2	PM	without Stubbington Bypass	ONE HOUR	16:45	18:15	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
1		ONE HOUR	✓	86	100.000
2		ONE HOUR	✓	1169	100.000
3		ONE HOUR	✓	301	100.000
4		ONE HOUR	✓	896	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To			
		1	2	3	4
From	1	0	22	30	34
	2	4	0	283	882
	3	4	189	0	107
	4	3	819	74	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To			
		1	2	3	4
From	1	0	5	0	0
	2	0	0	1	2
	3	0	0	0	0
	4	33	1	0	0

## Results

### Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.17	7.76	0.2	0.5	A	80	120
2	0.60	4.24	1.5	2.4	A	1089	1633
3	0.21	2.86	0.3	0.8	A	276	414
4	0.58	4.94	1.4	1.7	A	831	1247

### Main Results for each time segment

#### 16:45 - 17:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	66	16	818	748	0.088	65	9	0.0	0.1	5.338	A
2	893	223	104	2205	0.405	891	780	0.0	0.7	2.775	A
3	226	57	701	1841	0.123	226	293	0.0	0.1	2.228	A
4	682	170	148	1775	0.384	679	779	0.0	0.6	3.314	A

#### 17:00 - 17:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	79	20	979	671	0.117	78	11	0.1	0.1	6.145	A
2	1067	267	124	2189	0.487	1066	934	0.7	1.0	3.249	A
3	270	68	839	1735	0.156	270	351	0.1	0.2	2.456	A
4	814	204	177	1757	0.463	813	932	0.6	0.9	3.850	A

#### 17:15 - 17:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	96	24	1199	567	0.170	96	14	0.1	0.2	7.731	A
2	1306	327	152	2169	0.602	1304	1143	1.0	1.5	4.216	A
3	331	83	1027	1591	0.208	331	429	0.2	0.3	2.857	A
4	997	249	217	1733	0.575	995	1141	0.9	1.4	4.918	A

**17:30 - 17:45**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	96	24	1201	566	0.170	96	14	0.2	0.2	7.756	A
2	1306	327	153	2168	0.602	1306	1145	1.5	1.5	4.239	A
3	331	83	1029	1589	0.208	331	430	0.3	0.3	2.860	A
4	997	249	217	1733	0.576	997	1142	1.4	1.4	4.944	A

**17:45 - 18:00**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	79	20	983	670	0.117	79	11	0.2	0.1	6.172	A
2	1067	267	125	2189	0.487	1069	937	1.5	1.0	3.268	A
3	270	68	842	1733	0.156	270	352	0.3	0.2	2.463	A
4	814	204	178	1757	0.463	816	935	1.4	0.9	3.874	A

**18:00 - 18:15**

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	66	16	822	746	0.088	66	9	0.1	0.1	5.359	A
2	893	223	105	2204	0.405	894	784	1.0	0.7	2.794	A
3	226	57	704	1839	0.123	226	294	0.2	0.1	2.232	A
4	682	170	149	1775	0.384	683	782	0.9	0.6	3.334	A

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.10	0.00	0.00	0.10	0.10			N/A	N/A
2	0.69	0.56	1.02	1.42	1.47			N/A	N/A
3	0.14	0.00	0.00	0.14	0.14			N/A	N/A
4	0.63	0.56	1.01	1.41	1.47			N/A	N/A

**17:00 - 17:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.13	0.00	0.00	0.13	0.13			N/A	N/A
2	0.96	0.07	0.78	1.77	2.36			N/A	N/A
3	0.18	0.00	0.00	0.18	0.18			N/A	N/A
4	0.87	0.08	0.84	1.31	1.75			N/A	N/A

**17:15 - 17:30**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.20	0.03	0.26	0.47	0.49			N/A	N/A
2	1.52	0.03	0.26	1.52	1.52			N/A	N/A
3	0.26	0.03	0.25	0.46	0.48			N/A	N/A
4	1.35	0.03	0.26	1.35	1.35			N/A	N/A

**17:30 - 17:45**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.21	0.03	0.26	0.47	0.49			N/A	N/A
2	1.53	0.03	0.27	1.53	1.53			N/A	N/A
3	0.26	0.03	0.27	0.49	0.82			N/A	N/A
4	1.36	0.03	0.27	1.36	1.36			N/A	N/A

**17:45 - 18:00**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.14	0.00	0.00	0.14	0.14			N/A	N/A
2	0.97	0.51	1.02	1.17	1.17			N/A	N/A
3	0.19	0.00	0.00	0.19	0.19			N/A	N/A
4	0.88	0.36	0.99	1.43	1.49			N/A	N/A

**18:00 - 18:15**

Arm	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
1	0.10	0.00	0.00	0.10	0.10			N/A	N/A
2	0.70	0.09	0.81	1.40	1.47			N/A	N/A
3	0.14	0.00	0.00	0.14	0.14			N/A	N/A
4	0.63	0.07	0.75	1.37	1.45			N/A	N/A


Basic Results Summary  
**Basic Results Summary**

**User and Project Details**

<b>Project:</b>	<b>Gosport Western Access</b>
<b>Title:</b>	<b>Stubbington Bypass - Red Route</b>
<b>Location:</b>	Peel Common Roundabout
<b>Additional detail:</b>	
<b>File name:</b>	PCR Phase 3.lsg3x
<b>Author:</b>	K McDonald
<b>Company:</b>	Hampshire County Council
<b>Address:</b>	

**Scenario 1: '2019 DS1 Base AM' (FG1: 'Base 2019 AM', Plan 1: 'Network Control Plan 1')**

**Network Layout Diagram**

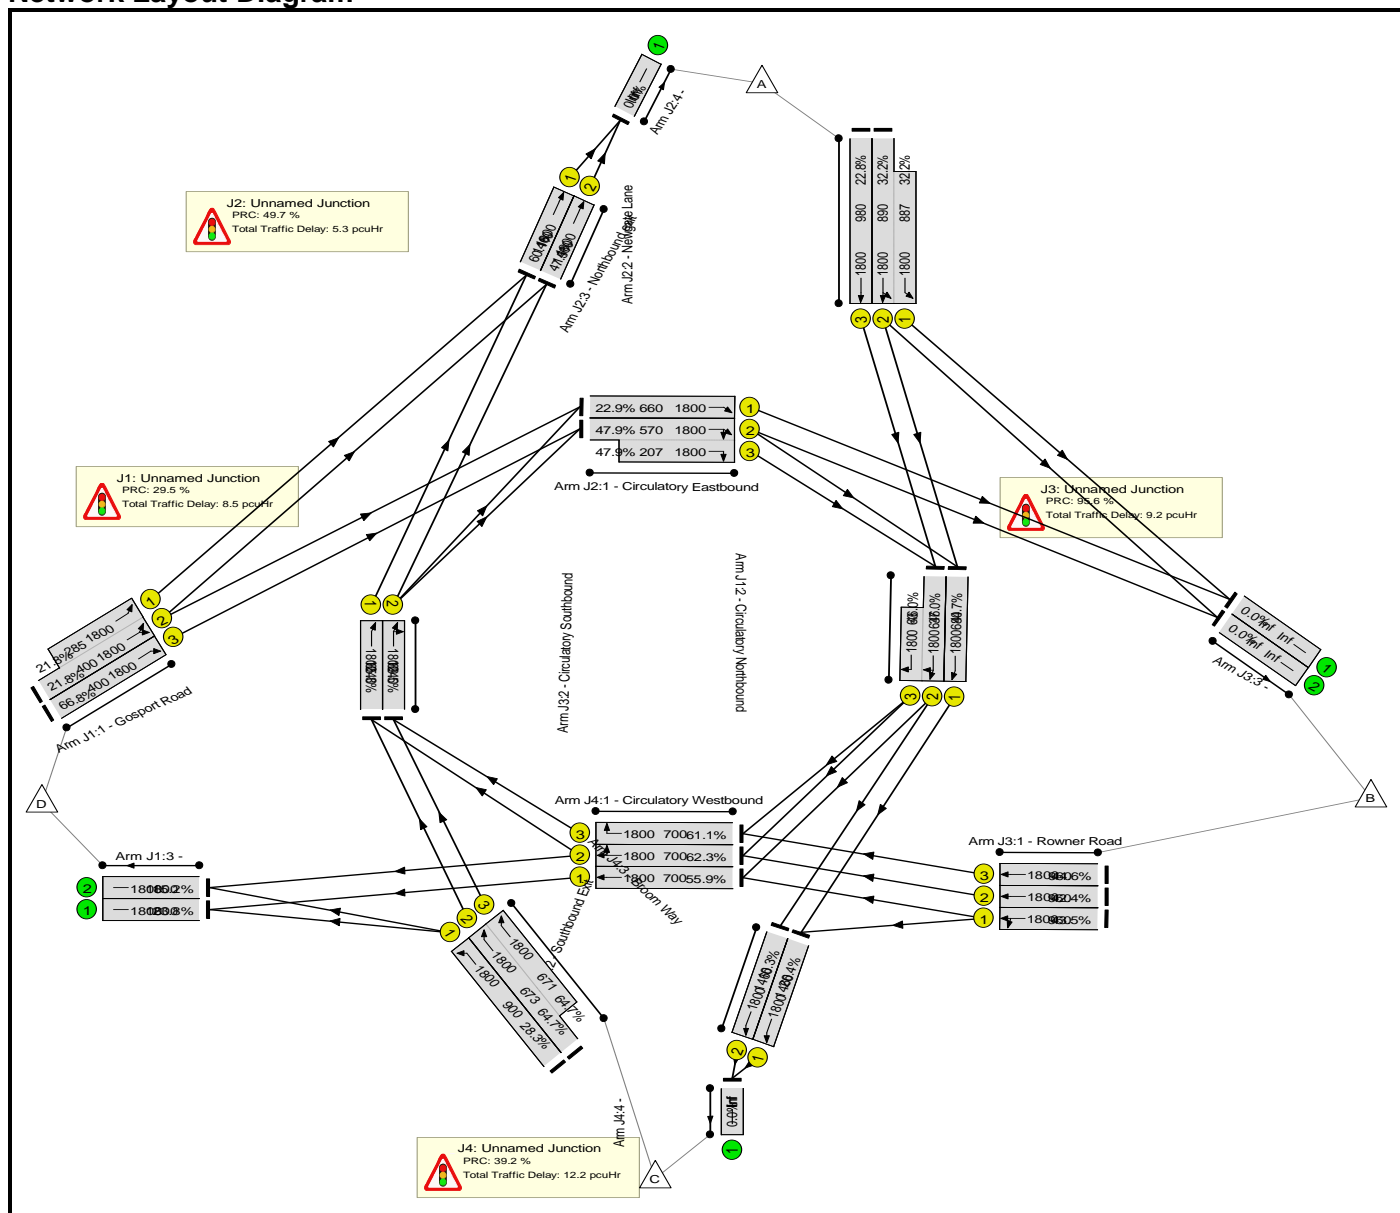

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)
<b>Network: Stubbington Bypass - Red Route</b>	-	-	-		-	-	-	-	-	-	69.5%	0	0	0	35.1	-	-
<b>J1: Unnamed Junction</b>	-	-	-		-	-	-	-	-	-	69.5%	0	0	0	8.5	-	-
1/2+1/1	Gosport Road Ahead Ahead2	U	B		1	19	-	149	1800:1800	400+285	21.8 : 21.8%	-	-	-	1.3	31.8	1.9
1/3	Gosport Road Ahead	U	B		1	19	-	267	1800	400	66.8%	-	-	-	3.4	45.3	7.1
2/1	Circulatory Northbound Ahead	U	A		1	61	-	816	1800	1240	65.8%	-	-	-	1.7	7.5	5.1
2/2	Circulatory Northbound Right Ahead	U	A		1	61	-	862	1800	1240	69.5%	-	-	-	1.9	7.8	5.3
3/1		U	-		-	-	-	428	1800	1800	23.8%	-	-	-	0.2	1.3	0.2
3/2		U	-		-	-	-	273	1800	1800	15.2%	-	-	-	0.1	1.2	0.1
<b>J2: Unnamed Junction</b>	-	-	-		-	-	-	-	-	-	60.1%	0	0	0	5.3	-	-
1/1	Circulatory Eastbound Ahead	U	C		1	32	-	151	1800	660	22.9%	-	-	-	0.5	11.3	2.8
1/2+1/3	Circulatory Eastbound Right Ahead	U	C		1	32	-	372	1800:1800	570+207	47.9 : 47.9%	-	-	-	0.7	6.9	4.0
2/2+2/1	Newgate Lane Ahead Left	U	D		1	48	-	573	1800:1800	890+887	32.2 : 32.2%	-	-	-	2.0	12.6	4.1
2/3	Newgate Lane Ahead	U	D		1	48	-	223	1800	980	22.8%	-	-	-	0.8	13.0	3.0
3/1	Northbound exit Ahead	U	J		1	72	-	878	1800	1460	60.1%	-	-	-	0.8	3.2	1.3
3/2	Northbound exit Ahead	U	J		1	72	-	693	1800	1460	47.5%	-	-	-	0.5	2.5	0.6

Basic Results Summary


<b>J3: Unnamed Junction</b>	-	-	-	-	-	-	-	-	-	-	46.0%	0	0	0	9.2	-	-
1/1	Rowner Road Ahead Left	U	F	1	47	-	418	1800	960	43.5%	-	-	-	1.9	16.1	6.7	
1/2	Rowner Road Ahead	U	F	1	47	-	407	1800	960	42.4%	-	-	-	1.8	15.9	6.5	
1/3	Rowner Road Ahead	U	F	1	47	-	428	1800	960	44.6%	-	-	-	1.9	16.2	6.9	
2/1	Circulatory Southbound Ahead	U	E	1	33	-	304	1800	680	44.7%	-	-	-	1.6	19.0	4.1	
2/2+2/3	Circulatory Southbound Right Ahead	U	E	1	33	-	322	1800:1800	637+63	46.0 : 46.0%	-	-	-	2.0	22.0	5.1	
<b>J4: Unnamed Junction</b>	-	-	-	-	-	-	-	-	-	64.7%	0	0	0	12.2	-	-	
1/1	Circulatory Westbound Ahead	U	G	1	34	-	391	1800	700	55.9%	-	-	-	2.1	19.1	3.9	
1/2	Circulatory Westbound Right Ahead	U	G	1	34	-	436	1800	700	62.3%	-	-	-	2.3	19.0	3.9	
1/3	Circulatory Westbound Right	U	G	1	34	-	428	1800	700	61.1%	-	-	-	2.1	17.3	3.2	
2/1	Southbound Exit Ahead	U	K	1	72	-	386	1800	1460	26.4%	-	-	-	0.2	2.0	0.5	
2/2	Southbound Exit Ahead	U	K	1	72	-	238	1800	1460	16.3%	-	-	-	0.1	1.5	0.1	
3/1	Broom Way Left	U	I	1	44	-	255	1800	900	28.3%	-	-	-	1.1	15.9	3.9	
3/2+3/3	Broom Way Ahead	U	H	1	45	-	869	1800:1800	673+671	64.7 : 64.7%	-	-	-	4.3	18.0	7.9	
		C1	Stream: 1 PRC for Signalled Lanes (%):		29.5	Total Delay for Signalled Lanes (pcuHr):		8.26	Cycle Time (s):		90						
		C1	Stream: 2 PRC for Signalled Lanes (%):		87.8	Total Delay for Signalled Lanes (pcuHr):		4.01	Cycle Time (s):		90						
		C1	Stream: 3 PRC for Signalled Lanes (%):		95.6	Total Delay for Signalled Lanes (pcuHr):		9.17	Cycle Time (s):		90						
		C1	Stream: 4 PRC for Signalled Lanes (%):		39.2	Total Delay for Signalled Lanes (pcuHr):		11.89	Cycle Time (s):		90						
		C1	Stream: 5 PRC for Signalled Lanes (%):		240.4	Total Delay for Signalled Lanes (pcuHr):		0.31	Cycle Time (s):		90						
		C1	Stream: 6 PRC for Signalled Lanes (%):		49.7	Total Delay for Signalled Lanes (pcuHr):		1.26	Cycle Time (s):		90						
				PRC Over All Lanes (%):	29.5	Total Delay Over All Lanes(pcuHr):		35.15									



Basic Results Summary

Scenario 2: '2019 DS1 Base PM' (FG2: 'Base 2019 PM', Plan 1: 'Network Control Plan 1')

Network Layout Diagram

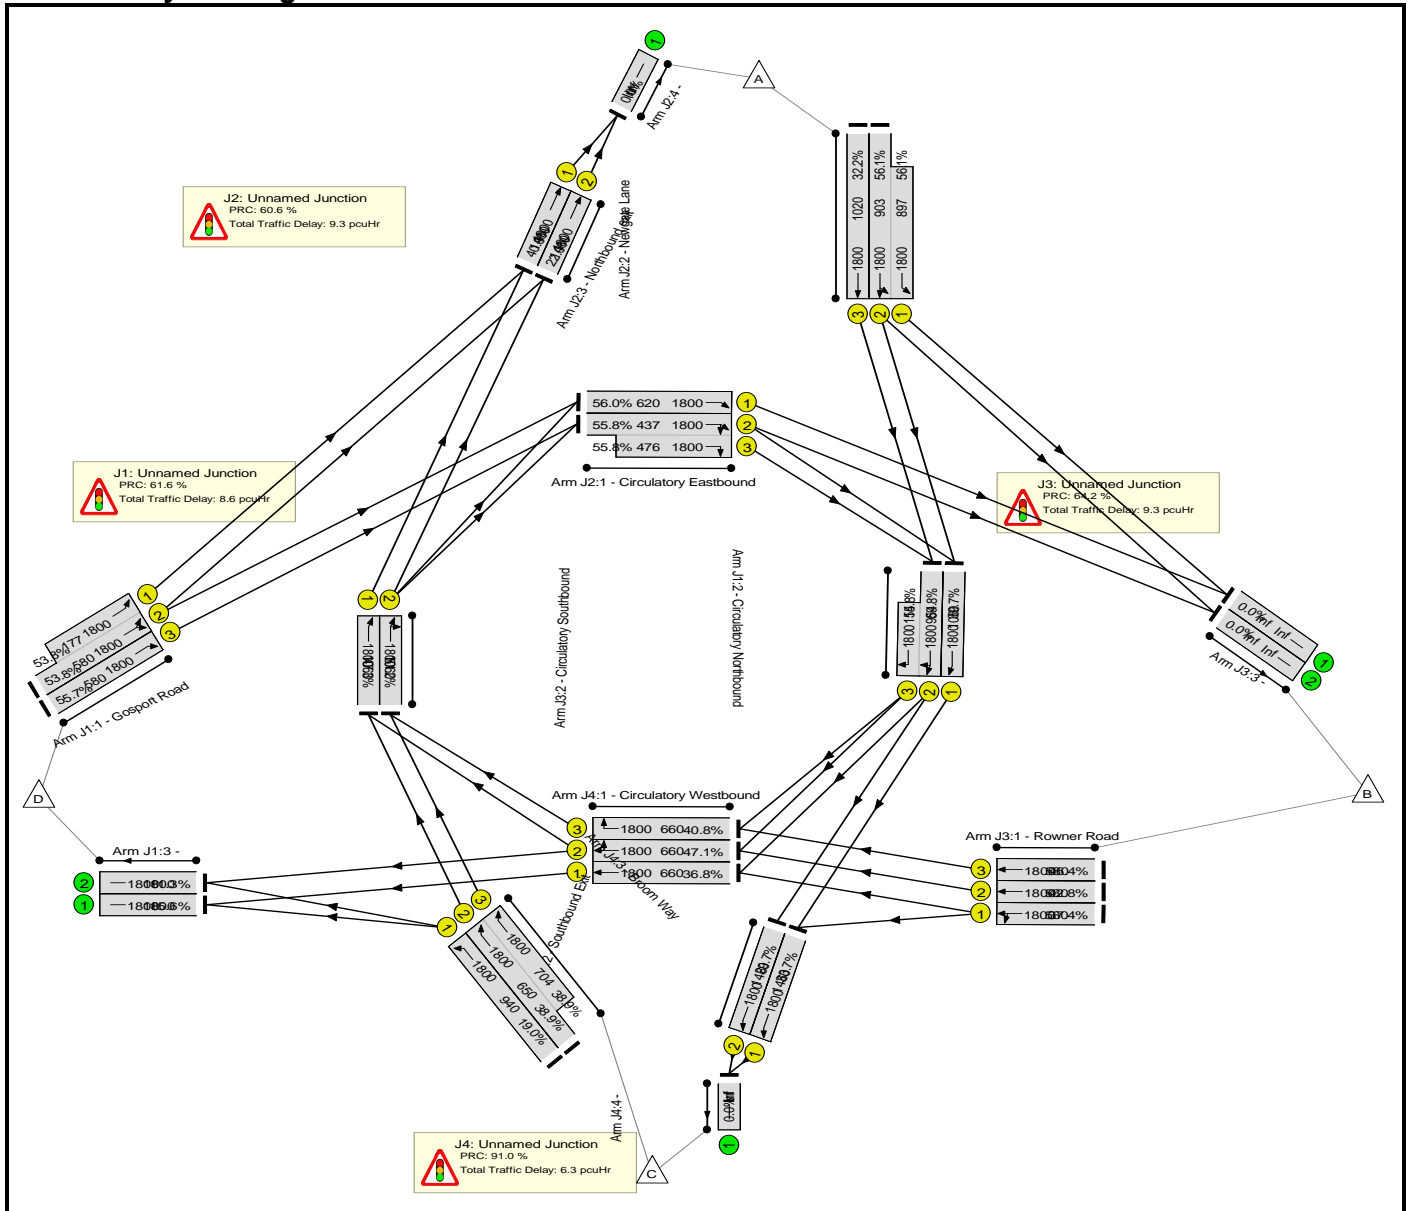

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)
<b>Network: Stubbington Bypass - Red Route</b>	-	-	-		-	-	-	-	-	-	56.1%	0	0	0	33.6	-	-
<b>J1: Unnamed Junction</b>	-	-	-		-	-	-	-	-	-	55.7%	0	0	0	8.6	-	-
1/2+1/1	Gosport Road Ahead Ahead2	U	B		1	28	-	407	1800:1800	580+177	53.8 : 53.8%	-	-	-	3.3	29.4	6.9
1/3	Gosport Road Ahead	U	B		1	28	-	323	1800	580	55.7%	-	-	-	2.9	32.2	7.3
2/1	Circulatory Northbound Ahead	U	A		1	52	-	501	1800	1060	47.3%	-	-	-	1.0	7.5	3.0
2/2	Circulatory Northbound Right Ahead	U	A		1	52	-	543	1800	1060	51.2%	-	-	-	1.2	7.8	3.2
3/1		U	-		-	-	-	281	1800	1800	15.6%	-	-	-	0.1	1.2	0.1
3/2		U	-		-	-	-	204	1800	1800	11.3%	-	-	-	0.1	1.1	0.1
<b>J2: Unnamed Junction</b>	-	-	-		-	-	-	-	-	-	56.1%	0	0	0	9.3	-	-
1/1	Circulatory Eastbound Ahead	U	C		1	30	-	347	1800	620	56.0%	-	-	-	1.2	12.6	8.2
1/2+1/3	Circulatory Eastbound Right Ahead	U	C		1	30	-	510	1800:1800	437+476	55.8 : 55.8%	-	-	-	2.4	17.1	6.3
2/2+2/1	Newgate Lane Ahead Left	U	D		1	50	-	1009	1800:1800	903+897	56.1 : 56.1%	-	-	-	3.9	14.0	8.2
2/3	Newgate Lane Ahead	U	D		1	50	-	328	1800	1020	32.2%	-	-	-	1.2	12.9	4.5
3/1	Northbound exit Ahead	U	J		1	72	-	596	1800	1460	40.8%	-	-	-	0.4	2.3	0.7
3/2	Northbound exit Ahead	U	J		1	72	-	321	1800	1460	22.0%	-	-	-	0.1	1.6	0.1

Basic Results Summary

<b>J3: Unnamed Junction</b>	-	-	-	-	-	-	-	-	-	-	<b>54.8%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>9.3</b>	-	-
1/1	Rowner Road Ahead Left	U	F	1	28	-	217	1800	580	37.4%	-	-	-	1.7	28.5	4.5	
1/2	Rowner Road Ahead	U	F	1	28	-	248	1800	580	42.8%	-	-	-	2.0	29.4	5.2	
1/3	Rowner Road Ahead	U	F	1	28	-	269	1800	580	46.4%	-	-	-	2.2	30.1	5.7	
2/1	Circulatory Southbound Ahead	U	E	1	52	-	421	1800	1060	39.7%	-	-	-	1.4	11.8	7.9	
2/2+2/3	Circulatory Southbound Right Ahead	U	E	1	52	-	594	1800:1800	969+115	54.8 : 54.8%	-	-	-	2.0	11.9	7.1	
<b>J4: Unnamed Junction</b>	-	-	-	-	-	-	-	-	-	<b>47.1%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>6.3</b>	-	-	
1/1	Circulatory Westbound Ahead	U	G	1	32	-	243	1800	660	36.8%	-	-	-	1.5	21.7	2.9	
1/2	Circulatory Westbound Right Ahead	U	G	1	32	-	311	1800	660	47.1%	-	-	-	1.3	14.8	2.1	
1/3	Circulatory Westbound Right	U	G	1	32	-	269	1800	660	40.8%	-	-	-	0.4	5.5	0.4	
2/1	Southbound Exit Ahead	U	K	1	72	-	492	1800	1460	33.7%	-	-	-	0.3	2.1	0.6	
2/2	Southbound Exit Ahead	U	K	1	72	-	434	1800	1460	29.7%	-	-	-	0.2	1.8	0.2	
3/1	Broom Way Left	U	I	1	46	-	179	1800	940	19.0%	-	-	-	0.7	13.8	2.5	
3/2+3/3	Broom Way Ahead	U	H	1	47	-	527	1800:1800	650+704	38.9 : 38.9%	-	-	-	2.0	13.7	4.0	
C1		Stream: 1 PRC for Signalled Lanes (%)		61.6		Total Delay for Signalled Lanes (pcuHr):		8.44		Cycle Time (s):		90					
C1		Stream: 2 PRC for Signalled Lanes (%)		60.6		Total Delay for Signalled Lanes (pcuHr):		8.75		Cycle Time (s):		90					
C1		Stream: 3 PRC for Signalled Lanes (%)		64.2		Total Delay for Signalled Lanes (pcuHr):		9.33		Cycle Time (s):		90					
C1		Stream: 4 PRC for Signalled Lanes (%)		91.0		Total Delay for Signalled Lanes (pcuHr):		5.84		Cycle Time (s):		90					
C1		Stream: 5 PRC for Signalled Lanes (%)		167.1		Total Delay for Signalled Lanes (pcuHr):		0.50		Cycle Time (s):		90					
C1		Stream: 6 PRC for Signalled Lanes (%)		120.5		Total Delay for Signalled Lanes (pcuHr):		0.53		Cycle Time (s):		90					
		PRC Over All Lanes (%)		60.6		Total Delay Over All Lanes(pcuHr):		33.55									


Basic Results Summary  
**Basic Results Summary**

**User and Project Details**

<b>Project:</b>	
<b>Title:</b>	
<b>Location:</b>	
<b>Additional detail:</b>	
<b>File name:</b>	Newgate Lane collingwood.lsg3x
<b>Author:</b>	
<b>Company:</b>	
<b>Address:</b>	

Scenario 1: '2019 DS1 AM Base' (FG1: '2019 DS1 AM Base', Plan 1: 'Plan 1')

**Network Layout Diagram**

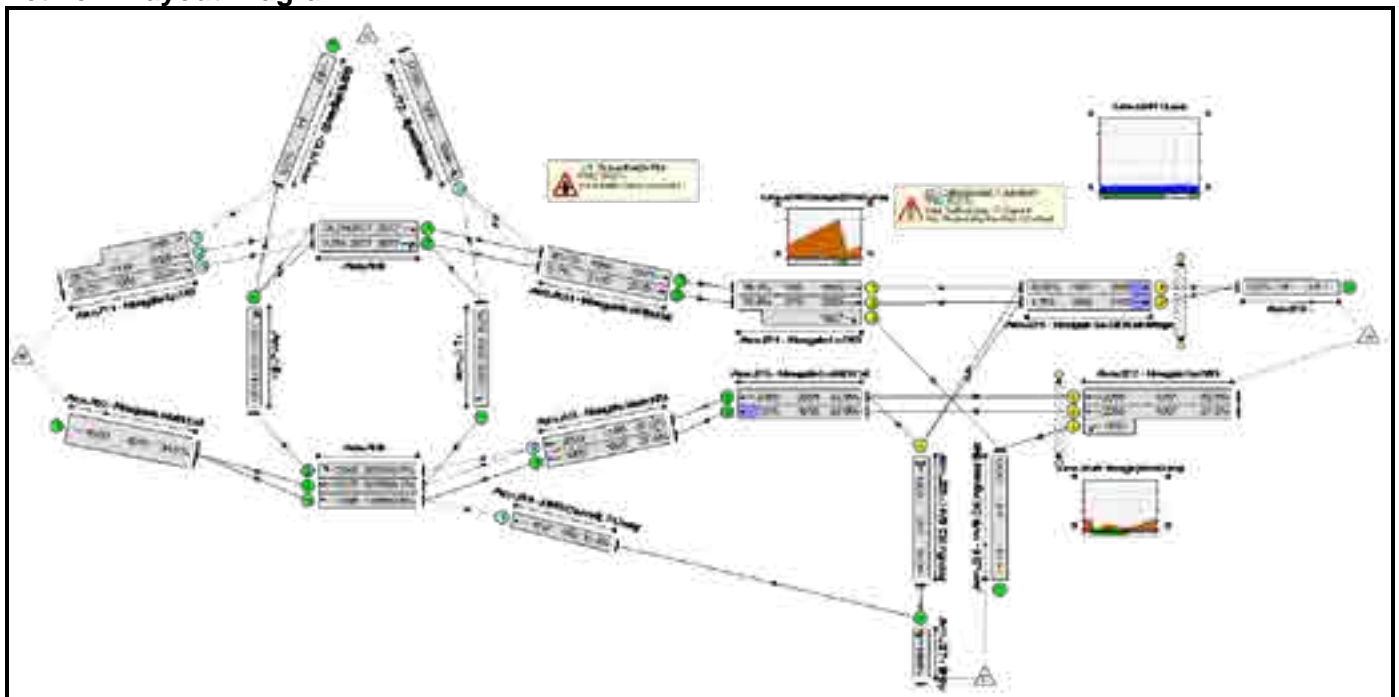

**Traffic Flows, Actual**

**Actual Flow :**

	Destination					Tot.
	A	B	C	D	Tot.	
Origin	A	0	1201	209	144	1554
	B	720	0	237	182	1139
	C	42	164	0	10	216
	D	16	57	6	0	79
	Tot.	778	1422	452	336	2988

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	<b>81.6%</b>	<b>3036</b>	<b>0</b>	<b>0</b>	<b>21.8</b>	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	<b>66.7%</b>	<b>3036</b>	<b>0</b>	<b>0</b>	<b>4.6</b>	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	947	2029:1786	1419	66.7%	1894	0	0	1.0	3.8	1.0	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	192	2029	1064	18.0%	192	0	0	0.1	2.1	0.1	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	216	1894	1206	17.9%	216	0	0	0.1	1.8	0.1	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	739	1965	1965	37.6%	-	-	-	0.3	1.5	0.3	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	677	2029	1188	57.0%	677	0	0	1.4	7.4	12.6	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	57	1747	552	10.3%	57	0	0	0.1	3.6	0.1	-
5/1	Right Ahead	U	-		-	-	-	215	2077	2077	10.4%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	710	2077	2077	34.2%	-	-	-	0.3	1.3	0.3	-
6/2	Right Ahead	U	-		-	-	-	192	2077	2077	9.2%	-	-	-	0.1	1.0	0.1	-
7/1	Right	U	-		-	-	-	164	2005	2005	8.2%	-	-	-	0.0	1.0	0.0	-
8/1	Ahead	U	-		-	-	-	796	1965	1965	40.5%	-	-	-	0.3	1.5	0.3	-
8/2	Ahead	U	-		-	-	-	626	2077	2077	30.1%	-	-	-	0.2	1.2	0.2	-
8/3	Right	U	-		-	-	-	215	2005	2005	10.7%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1422	4070	4070	34.9%	-	-	-	0.3	0.7	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	749	1965	1965	38.1%	-	-	-	0.3	1.5	0.3	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	205	2105	2105	9.7%	-	-	-	0.1	0.9	0.1	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>81.6%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>17.2</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	749	1915	985	76.1%	-	-	-	4.4	21.1	13.0	6.7
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	205	2055:1827	279	73.6%	-	-	-	2.9	51.0	4.9	0.9
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	883	2055:1702	1081	81.6%	-	-	-	5.4	22.2	15.1	6.8
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	671	2055	1057	63.5%	-	-	-	3.2	16.9	10.2	6.0
3/1	HMS Collingwood Right Left	U	D		1	7	-	22	1809	207	10.6%	-	-	-	0.2	37.6	0.4	0.4
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	750	1965	1544	48.6%	-	-	-	0.5	2.4	0.6	0.2
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	28	2105	1654	1.7%	-	-	-	0.0	1.2	0.0	0.0
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	739	1915	1915	38.6%	-	-	-	0.3	1.6	0.5	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	677	2055	2055	32.9%	-	-	-	0.2	1.3	0.2	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):				10.2	Total Delay for Signalled Lanes (pcuHr):				16.63	Cycle Time (s):				70
				PRC Over All Lanes (%):				10.2	Total Delay Over All Lanes(pcuHr):				21.84					

Basic Results Summary

Scenario 2: '2019 DS1 PM Base' (FG2: '2019 DS1 PM Base', Plan 1: 'Plan 1')

Network Layout Diagram

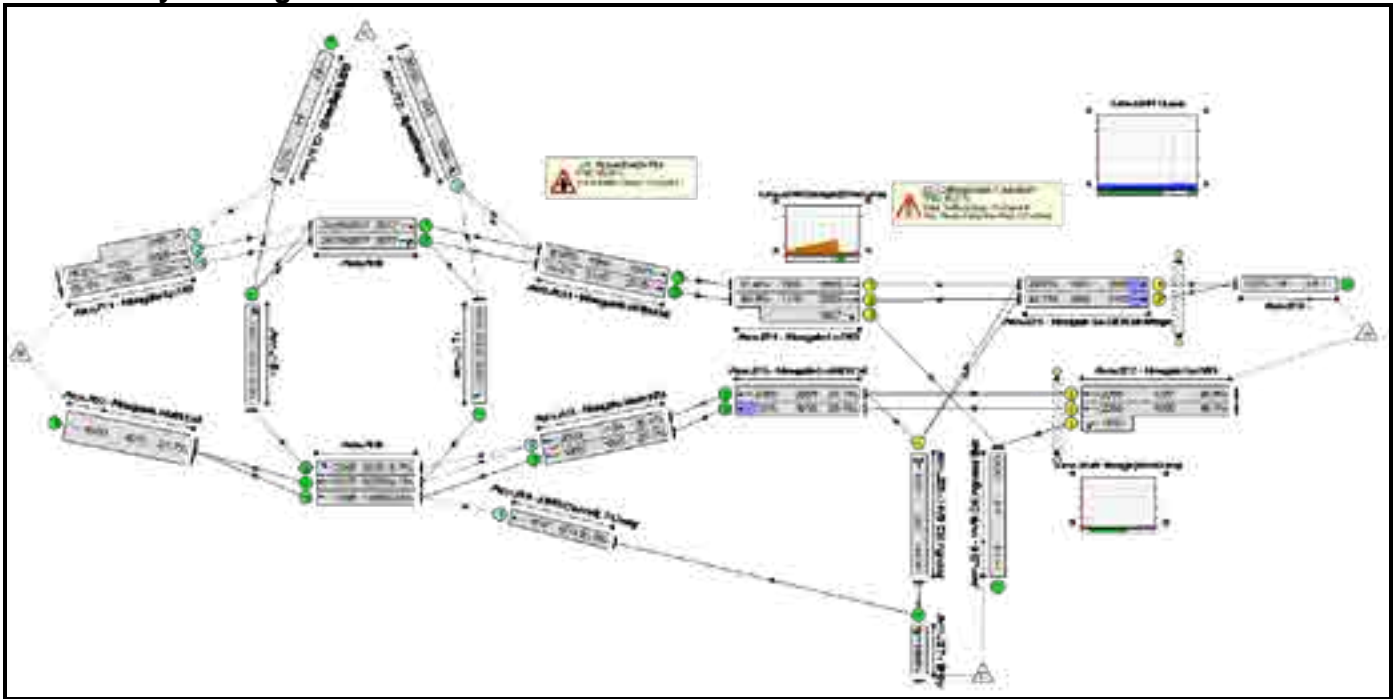

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	744	151	10	905
	B	1128	0	254	69	1451
	C	116	261	0	7	384
	D	69	124	23	0	216
	Tot.	1313	1129	428	86	2956

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	61.4%	3220	0	0	15.8	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	55.4%	3220	0	0	3.8	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	848	2029:1786	1553	54.6%	1696	0	0	0.6	2.5	0.6	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	603	2029	1088	55.4%	603	0	0	0.6	3.7	0.6	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	384	1894	994	38.6%	384	0	0	0.3	2.9	0.3	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	505	1965	1965	25.7%	-	-	-	0.2	1.2	0.2	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	413	2029	1134	36.4%	413	0	0	0.4	3.1	4.7	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	124	1747	604	20.5%	124	0	0	0.1	3.7	0.1	-
5/1	Right Ahead	U	-		-	-	-	174	2077	2077	8.4%	-	-	-	0.0	0.9	0.0	-
6/1	Ahead	U	-		-	-	-	594	2077	2077	28.6%	-	-	-	0.2	1.2	0.2	-
6/2	Right Ahead	U	-		-	-	-	603	2077	2077	29.0%	-	-	-	0.2	1.2	0.2	-
7/1	Right	U	-		-	-	-	261	2005	2005	13.0%	-	-	-	0.1	1.0	0.1	-
8/1	Ahead	U	-		-	-	-	629	1965	1965	32.0%	-	-	-	0.2	1.3	0.2	-
8/2	Ahead	U	-		-	-	-	500	2077	2077	24.1%	-	-	-	0.2	1.1	0.2	-
8/3	Right	U	-		-	-	-	174	2005	2005	8.7%	-	-	-	0.0	1.0	0.0	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1129	4070	4070	27.7%	-	-	-	0.2	0.6	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	605	1965	1965	30.8%	-	-	-	0.2	1.3	0.2	-




Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	715	2105	2105	34.0%	-	-	-	0.3	1.3	0.3	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>61.4%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>11.9</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	605	1915	985	61.4%	-	-	-	2.8	16.8	9.0	5.4
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	715	2055:1827	1174	60.9%	-	-	-	3.5	17.5	9.5	5.7
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	515	2055:1702	1056	48.7%	-	-	-	2.0	14.2	6.8	4.5
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	390	2055	1057	36.9%	-	-	-	1.4	12.9	4.7	3.5
3/1	HMS Collingwood Right Left	U	D		1	7	-	92	1811	207	44.5%	-	-	-	1.1	44.5	2.1	1.5
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	616	1965	1544	39.9%	-	-	-	0.4	2.1	0.5	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	697	2105	1654	42.1%	-	-	-	0.4	2.0	0.5	0.1
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	505	1915	1915	26.4%	-	-	-	0.2	1.4	0.4	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	413	2055	2055	20.1%	-	-	-	0.1	1.1	0.1	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		46.5		Total Delay for Signalled Lanes (pcuHr):		11.62		Cycle Time (s):		70				
				PRC Over All Lanes (%):		46.5		Total Delay Over All Lanes(pcuHr):		15.77								

Basic Results Summary

Scenario 3: '2024 DS1 AM Base' (FG3: '2024 DS1 AM Base', Plan 1: 'Plan 1')

Network Layout Diagram

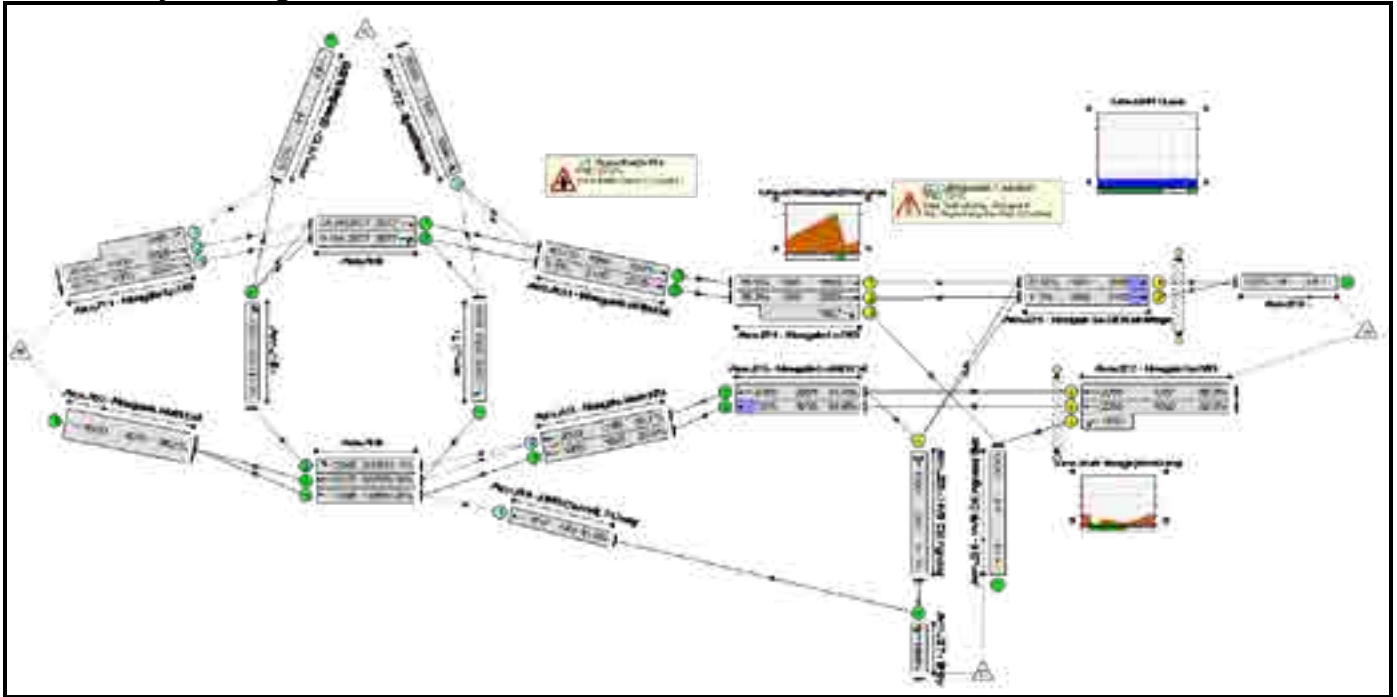

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	1244	216	149	1609
	B	746	0	245	188	1179
	C	43	170	0	11	224
	D	17	59	6	0	82
	Tot.	806	1473	467	348	3094

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	<b>83.9%</b>	<b>3160</b>	<b>0</b>	<b>0</b>	<b>24.1</b>	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	<b>70.4%</b>	<b>3160</b>	<b>0</b>	<b>0</b>	<b>5.2</b>	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	991	2029:1786	1408	70.4%	1982	0	0	1.2	4.3	1.2	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	188	2029	1060	17.7%	188	0	0	0.1	2.1	0.1	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	224	1894	1183	18.9%	224	0	0	0.1	1.9	0.1	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	759	1965	1965	38.6%	-	-	-	0.3	1.5	0.3	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	707	2029	1185	59.7%	707	0	0	1.6	8.3	13.4	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	59	1747	548	10.8%	59	0	0	0.1	3.7	0.1	-
5/1	Right Ahead	U	-		-	-	-	222	2077	2077	10.7%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	746	2077	2077	35.9%	-	-	-	0.3	1.4	0.3	-
6/2	Right Ahead	U	-		-	-	-	188	2077	2077	9.1%	-	-	-	0.0	1.0	0.0	-
7/1	Right	U	-		-	-	-	170	2005	2005	8.5%	-	-	-	0.0	1.0	0.0	-
8/1	Ahead	U	-		-	-	-	818	1965	1965	41.6%	-	-	-	0.4	1.6	0.4	-
8/2	Ahead	U	-		-	-	-	655	2077	2077	31.5%	-	-	-	0.2	1.3	0.2	-
8/3	Right	U	-		-	-	-	222	2005	2005	11.1%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1473	4070	4070	36.2%	-	-	-	0.3	0.7	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	787	1965	1965	40.1%	-	-	-	0.3	1.5	0.3	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	201	2105	2105	9.5%	-	-	-	0.1	0.9	0.1	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>83.9%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>18.9</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	787	1915	985	79.9%	-	-	-	5.0	22.9	14.4	7.0
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	201	2055:1827	264	76.2%	-	-	-	3.1	56.1	5.2	0.9
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	908	2055:1702	1082	83.9%	-	-	-	6.0	23.7	16.1	7.1
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	701	2055	1057	66.3%	-	-	-	3.4	17.6	10.9	6.2
3/1	HMS Collingwood Right Left	U	D		1	7	-	23	1810	207	11.1%	-	-	-	0.2	37.7	0.5	0.4
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	788	1965	1544	51.0%	-	-	-	0.6	2.5	0.7	0.2
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	18	2105	1654	1.1%	-	-	-	0.0	1.1	0.0	0.0
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	759	1915	1915	39.6%	-	-	-	0.3	1.6	0.5	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	707	2055	2055	34.4%	-	-	-	0.3	1.3	0.3	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		7.2		Total Delay for Signalled Lanes (pcuHr):		18.34		Cycle Time (s): 70						
				PRC Over All Lanes (%):		7.2		Total Delay Over All Lanes(pcuHr):		24.11								

Basic Results Summary

Scenario 4: '2024 DS1 PM Base' (FG4: '2024 DS1 PM Base', Plan 1: 'Plan 1')

Network Layout Diagram

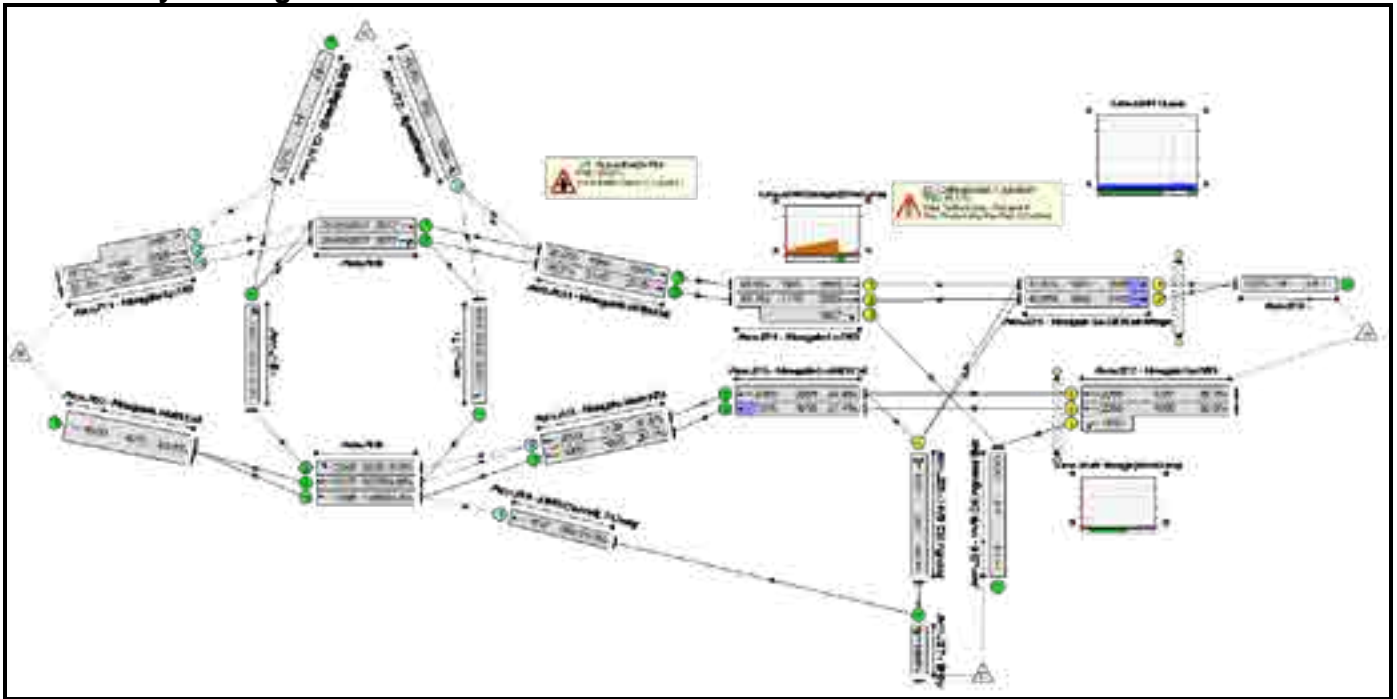

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	771	157	10	938
	B	1170	0	263	71	1504
	C	120	271	0	7	398
	D	72	129	24	0	225
	Tot.	1362	1171	444	88	3065

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	63.8%	3340	0	0	16.8	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	57.4%	3340	0	0	4.1	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	882	2029:1786	1544	57.1%	1764	0	0	0.7	2.7	0.7	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	622	2029	1084	57.4%	622	0	0	0.7	3.9	0.7	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	398	1894	962	41.4%	398	0	0	0.4	3.2	0.4	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	525	1965	1965	26.7%	-	-	-	0.2	1.2	0.2	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	427	2029	1129	37.8%	427	0	0	0.4	3.3	5.0	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	129	1747	599	21.5%	129	0	0	0.1	3.8	0.1	-
5/1	Right Ahead	U	-		-	-	-	181	2077	2077	8.7%	-	-	-	0.0	0.9	0.0	-
6/1	Ahead	U	-		-	-	-	619	2077	2077	29.8%	-	-	-	0.2	1.2	0.2	-
6/2	Right Ahead	U	-		-	-	-	622	2077	2077	29.9%	-	-	-	0.2	1.2	0.2	-
7/1	Right	U	-		-	-	-	271	2005	2005	13.5%	-	-	-	0.1	1.0	0.1	-
8/1	Ahead	U	-		-	-	-	654	1965	1965	33.3%	-	-	-	0.2	1.4	0.2	-
8/2	Ahead	U	-		-	-	-	517	2077	2077	24.9%	-	-	-	0.2	1.2	0.2	-
8/3	Right	U	-		-	-	-	181	2005	2005	9.0%	-	-	-	0.0	1.0	0.0	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1171	4070	4070	28.8%	-	-	-	0.2	0.6	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	628	1965	1965	32.0%	-	-	-	0.2	1.3	0.2	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	740	2105	2105	35.2%	-	-	-	0.3	1.3	0.3	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>63.8%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>12.6</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	628	1915	985	63.8%	-	-	-	3.0	17.3	9.6	5.6
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	740	2055:1827	1173	63.1%	-	-	-	3.7	17.9	10.0	5.9
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	535	2055:1702	1056	50.6%	-	-	-	2.2	14.5	7.1	4.7
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	403	2055	1057	38.1%	-	-	-	1.5	13.0	5.0	3.6
3/1	HMS Collingwood Right Left	U	D		1	7	-	96	1811	207	46.4%	-	-	-	1.2	45.1	2.2	1.6
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	641	1965	1544	41.5%	-	-	-	0.4	2.1	0.5	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	721	2105	1654	43.6%	-	-	-	0.4	2.1	0.5	0.2
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	525	1915	1915	27.4%	-	-	-	0.2	1.4	0.4	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	427	2055	2055	20.8%	-	-	-	0.1	1.1	0.1	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		41.1		Total Delay for Signalled Lanes (pcuHr):		12.31		Cycle Time (s):		70				
				PRC Over All Lanes (%):		41.1		Total Delay Over All Lanes(pcuHr):		16.77								

Basic Results Summary

Scenario 5: '2024 DS1 AM Base + Development' (FG5: '2024 DS1 AM Base+Dev', Plan 1: 'Plan 1')

Network Layout Diagram

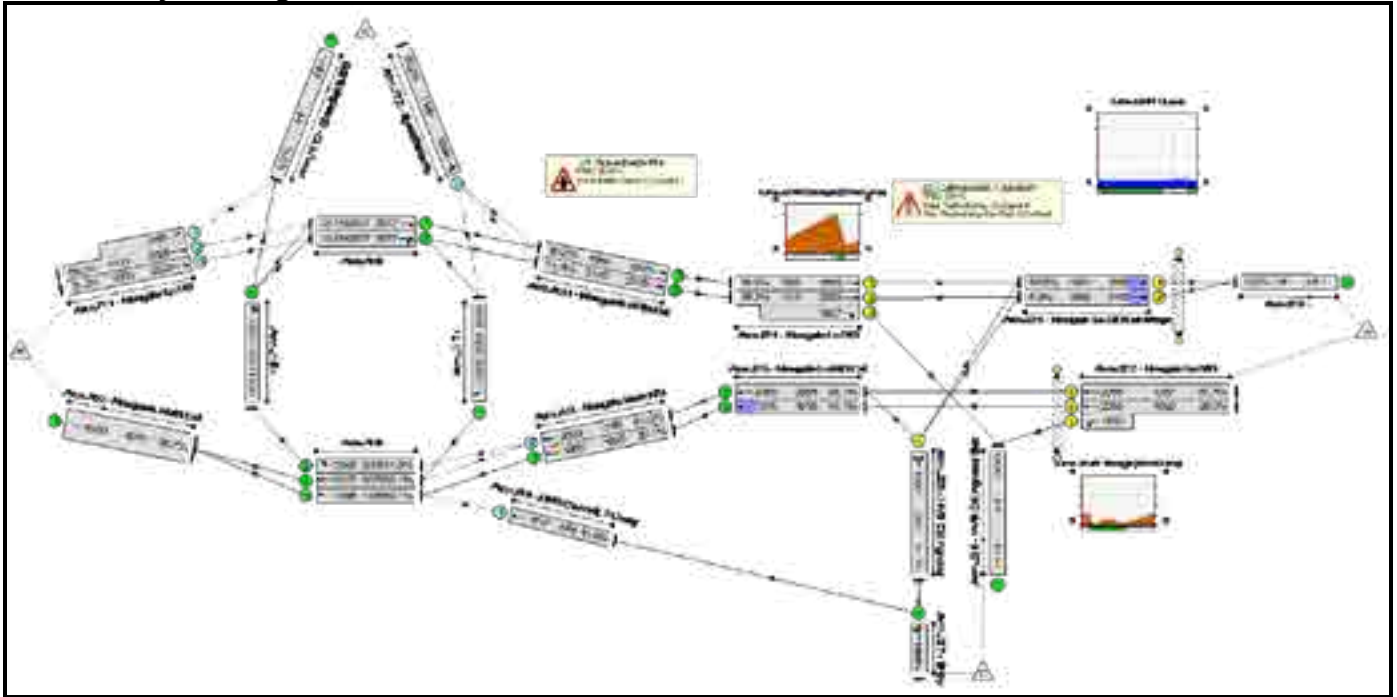

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	1264	220	152	1636
	B	766	0	245	188	1199
	C	44	170	0	11	225
	D	17	59	6	0	82
	Tot.	827	1493	471	351	3142



Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	<b>85.0%</b>	<b>3180</b>	<b>0</b>	<b>0</b>	<b>24.5</b>	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	<b>69.0%</b>	<b>3180</b>	<b>0</b>	<b>0</b>	<b>5.3</b>	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	975	2029:1786	1413	69.0%	1950	0	0	1.1	4.1	1.1	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	224	2029	1058	21.2%	224	0	0	0.1	2.2	0.1	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	225	1894	1169	19.2%	225	0	0	0.1	1.9	0.1	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	768	1965	1965	39.1%	-	-	-	0.3	1.5	0.3	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	722	2029	1185	61.0%	722	0	0	1.8	8.7	13.8	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	59	1747	546	10.8%	59	0	0	0.1	3.7	0.1	-
5/1	Right Ahead	U	-		-	-	-	226	2077	2077	10.9%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	730	2077	2077	35.1%	-	-	-	0.3	1.3	0.3	-
6/2	Right Ahead	U	-		-	-	-	224	2077	2077	10.8%	-	-	-	0.1	1.0	0.1	-
7/1	Right	U	-		-	-	-	170	2005	2005	8.5%	-	-	-	0.0	1.0	0.0	-
8/1	Ahead	U	-		-	-	-	827	1965	1965	42.1%	-	-	-	0.4	1.6	0.4	-
8/2	Ahead	U	-		-	-	-	666	2077	2077	32.1%	-	-	-	0.2	1.3	0.2	-
8/3	Right	U	-		-	-	-	226	2005	2005	11.3%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1493	4070	4070	36.7%	-	-	-	0.3	0.7	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	770	1965	1965	39.2%	-	-	-	0.3	1.5	0.3	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	239	2105	2105	11.4%	-	-	-	0.1	1.0	0.1	-
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>85.0%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>19.2</b>	-	-	-
1/1	Newgate Ln S/B Ahead	U	A	1	35	-	770	1915	985	78.2%	-	-	-	4.7	22.1	13.7	6.8
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C	1	35:9	-	239	2055:1827	313	76.2%	-	-	-	3.2	48.7	5.2	0.9
2/2+2/1	Newgate Ln N/B Ahead Left	U	B	1	35	-	920	2055:1702	1082	85.0%	-	-	-	6.3	24.5	16.8	7.1
2/3	Newgate Ln N/B Ahead	U	B	1	35	-	716	2055	1057	67.7%	-	-	-	3.6	17.9	11.4	6.4
3/1	HMS Collingwood Right Left	U	D	1	7	-	23	1810	207	11.1%	-	-	-	0.2	37.7	0.5	0.4
4/1	Newgate Ln S/B Exit Merge Ahead	U	G	1	54	-	771	1965	1544	49.9%	-	-	-	0.5	2.5	0.7	0.2
4/2	Newgate Ln S/B Exit Merge Ahead	U	G	1	54	-	56	2105	1654	3.4%	-	-	-	0.0	1.2	0.0	0.0
5/1	Newgate Ln N/B Exit Ahead	U	-	-	-	-	768	1915	1915	40.1%	-	-	-	0.3	1.6	0.5	-
5/2	Newgate Ln N/B Exit Ahead	U	-	-	-	-	722	2055	2055	35.1%	-	-	-	0.3	1.3	0.3	-
Ped Link: P1	Newgate Ln S/B	-	E	1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F	1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		5.8		Total Delay for Signalled Lanes (pcuHr):		18.56		Cycle Time (s):		70			
				PRC Over All Lanes (%):		5.8		Total Delay Over All Lanes(pcuHr):		24.45							

Basic Results Summary

Scenario 6: '2024 DS1 PM Base + Development' (FG6: '2024 DS1 PM Base+Dev', Plan 1: 'Plan 1')

Network Layout Diagram

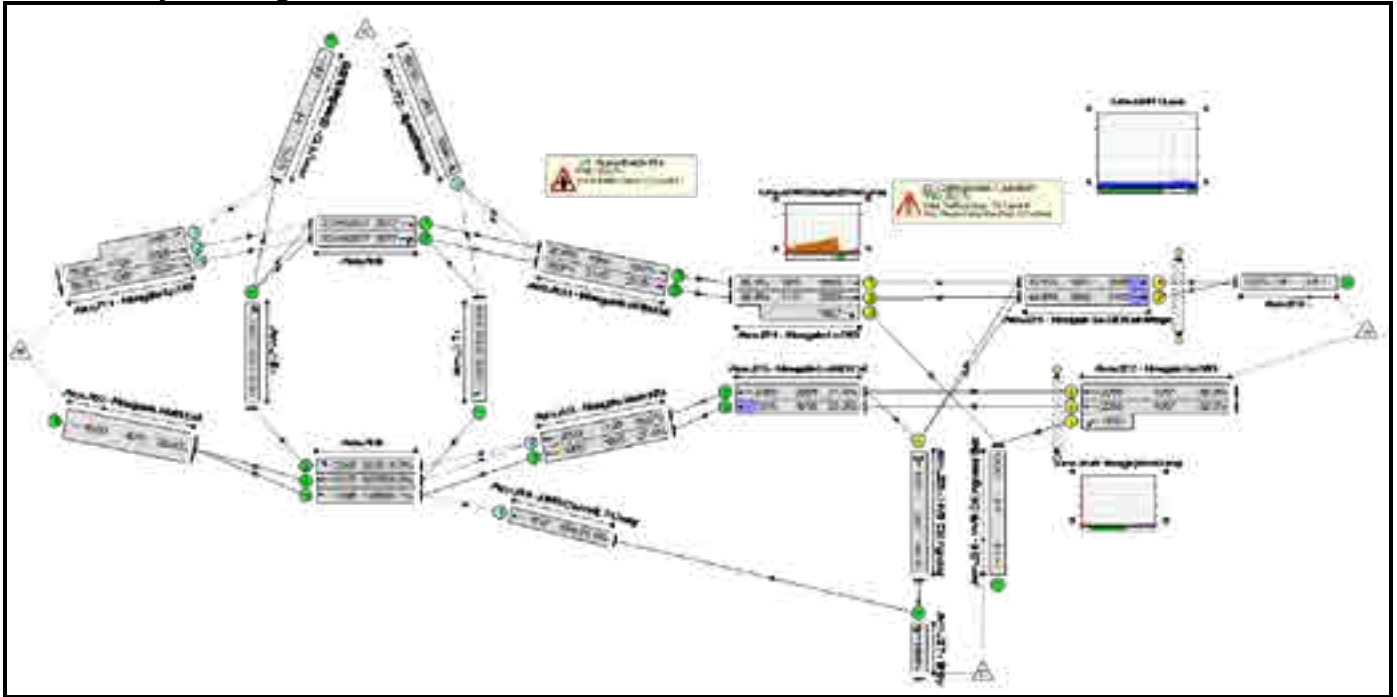

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	795	161	11	967
	B	1196	0	263	71	1530
	C	123	271	0	7	401
	D	73	129	24	0	226
	Tot.	1392	1195	448	89	3124

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	65.1%	3398	0	0	17.4	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	58.8%	3398	0	0	4.3	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	899	2029:1786	1529	58.8%	1798	0	0	0.7	2.9	0.7	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	631	2029	1081	58.3%	631	0	0	0.7	4.0	0.7	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	401	1894	944	42.5%	401	0	0	0.4	3.3	0.4	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	541	1965	1965	27.5%	-	-	-	0.2	1.3	0.2	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	439	2029	1129	38.9%	439	0	0	0.4	3.4	5.3	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	129	1747	596	21.6%	129	0	0	0.1	3.9	0.1	-
5/1	Right Ahead	U	-		-	-	-	185	2077	2077	8.9%	-	-	-	0.0	1.0	0.0	-
6/1	Ahead	U	-		-	-	-	636	2077	2077	30.6%	-	-	-	0.2	1.2	0.2	-
6/2	Right Ahead	U	-		-	-	-	631	2077	2077	30.4%	-	-	-	0.2	1.2	0.2	-
7/1	Right	U	-		-	-	-	271	2005	2005	13.5%	-	-	-	0.1	1.0	0.1	-
8/1	Ahead	U	-		-	-	-	670	1965	1965	34.1%	-	-	-	0.3	1.4	0.3	-
8/2	Ahead	U	-		-	-	-	525	2077	2077	25.3%	-	-	-	0.2	1.2	0.2	-
8/3	Right	U	-		-	-	-	185	2005	2005	9.2%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1195	4070	4070	29.4%	-	-	-	0.2	0.6	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	641	1965	1965	32.6%	-	-	-	0.2	1.4	0.2	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	756	2105	2105	35.9%	-	-	-	0.3	1.3	0.3	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>65.1%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>13.1</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	641	1915	985	65.1%	-	-	-	3.1	17.6	10.0	5.7
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	756	2055:1827	1171	64.6%	-	-	-	3.8	18.2	10.3	6.0
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	552	2055:1702	1057	52.2%	-	-	-	2.3	14.8	7.5	4.8
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	415	2055	1057	39.3%	-	-	-	1.5	13.2	5.2	3.7
3/1	HMS Collingwood Right Left	U	D		1	7	-	97	1811	207	46.9%	-	-	-	1.2	45.3	2.2	1.6
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	655	1965	1544	42.4%	-	-	-	0.4	2.2	0.5	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	737	2105	1654	44.6%	-	-	-	0.4	2.1	0.6	0.2
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	541	1915	1915	28.3%	-	-	-	0.2	1.4	0.4	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	439	2055	2055	21.4%	-	-	-	0.1	1.1	0.1	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		38.3		Total Delay for Signalled Lanes (pcuHr):		12.78		Cycle Time (s): 70						
				PRC Over All Lanes (%):		38.3		Total Delay Over All Lanes(pcuHr):		17.43								

Basic Results Summary

Scenario 7: '2019 DS2 AM Base' (FG7: '2019 DS2 AM Base', Plan 1: 'Plan 1')

Network Layout Diagram

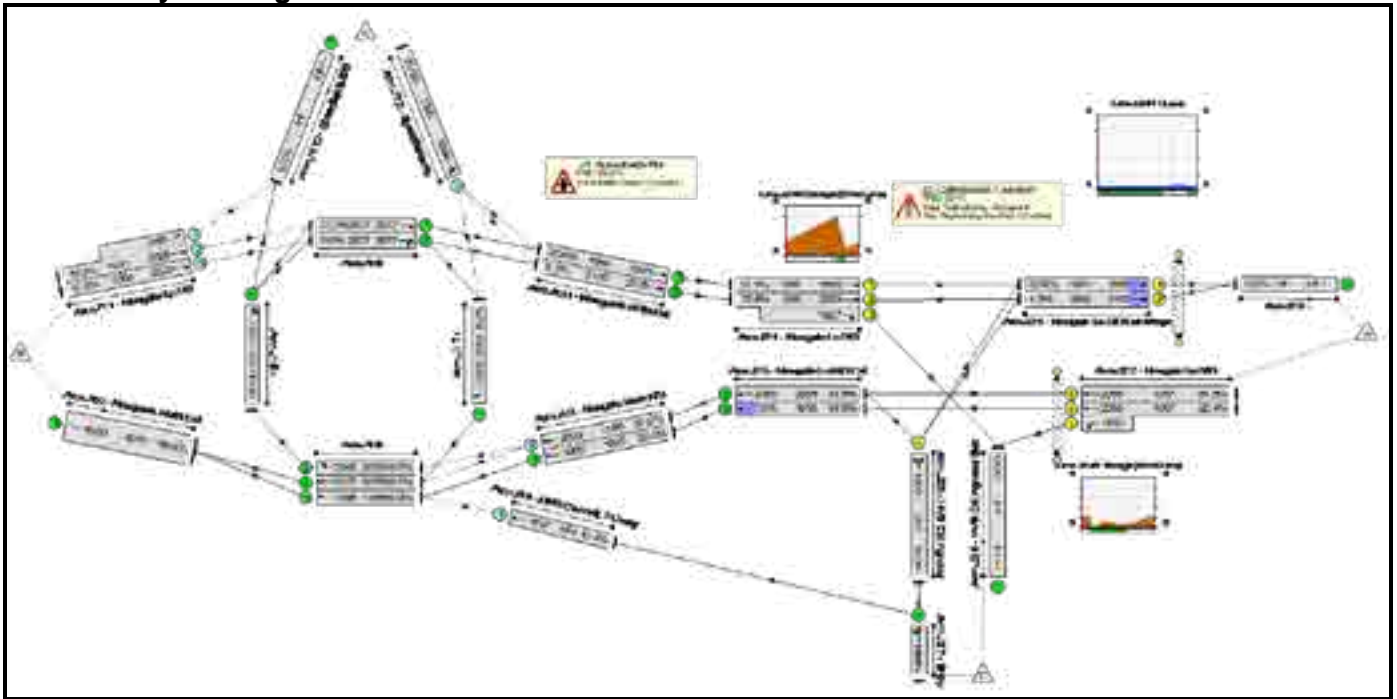

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin						
A	0	1220	209	144		1573
B	465	0	237	182		884
C	42	164	0	10		216
D	16	57	6	0		79
Tot.	523	1441	452	336		2752

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	<b>82.4%</b>	<b>2543</b>	<b>0</b>	<b>0</b>	<b>18.7</b>	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	<b>57.9%</b>	<b>2543</b>	<b>0</b>	<b>0</b>	<b>3.8</b>	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	698	2029:1786	1611	43.3%	1396	0	0	0.4	2.0	0.4	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	186	2029	1064	17.5%	186	0	0	0.1	2.0	0.1	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	216	1894	1390	15.5%	216	0	0	0.1	1.5	0.1	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	747	1965	1965	38.0%	-	-	-	0.3	1.5	0.3	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	688	2029	1188	57.9%	688	0	0	1.5	7.7	12.9	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	57	1747	551	10.4%	57	0	0	0.1	3.6	0.1	-
5/1	Right Ahead	U	-		-	-	-	215	2077	2077	10.4%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	461	2077	2077	22.2%	-	-	-	0.1	1.1	0.1	-
6/2	Right Ahead	U	-		-	-	-	186	2077	2077	9.0%	-	-	-	0.0	1.0	0.0	-
7/1	Right	U	-		-	-	-	164	2005	2005	8.2%	-	-	-	0.0	1.0	0.0	-
8/1	Ahead	U	-		-	-	-	804	1965	1965	40.9%	-	-	-	0.3	1.5	0.3	-
8/2	Ahead	U	-		-	-	-	637	2077	2077	30.7%	-	-	-	0.2	1.2	0.2	-
8/3	Right	U	-		-	-	-	215	2005	2005	10.7%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1441	4070	4070	35.4%	-	-	-	0.3	0.7	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	503	1965	1965	25.6%	-	-	-	0.2	1.2	0.2	-

Basic Results Summary


11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	196	2105	2105	9.3%	-	-	-	0.1	0.9	0.1	-
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>82.4%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>14.9</b>	-	-	-
1/1	Newgate Ln S/B Ahead	U	A	1	35	-	503	1915	985	51.1%	-	-	-	2.1	14.9	6.9	4.5
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C	1	35:9	-	196	2055:1827	266	73.6%	-	-	-	2.9	52.9	4.9	0.9
2/2+2/1	Newgate Ln N/B Ahead Left	U	B	1	35	-	891	2055:1702	1081	82.4%	-	-	-	5.6	22.7	15.4	6.9
2/3	Newgate Ln N/B Ahead	U	B	1	35	-	682	2055	1057	64.5%	-	-	-	3.2	17.1	10.4	6.1
3/1	HMS Collingwood Right Left	U	D	1	7	-	22	1809	207	10.6%	-	-	-	0.2	37.6	0.4	0.4
4/1	Newgate Ln S/B Exit Merge Ahead	U	G	1	54	-	503	1965	1544	32.6%	-	-	-	0.3	1.9	0.4	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G	1	54	-	20	2105	1654	1.2%	-	-	-	0.0	1.1	0.0	0.0
5/1	Newgate Ln N/B Exit Ahead	U	-	-	-	-	747	1915	1915	39.0%	-	-	-	0.3	1.6	0.5	-
5/2	Newgate Ln N/B Exit Ahead	U	-	-	-	-	688	2055	2055	33.5%	-	-	-	0.3	1.3	0.3	-
Ped Link: P1	Newgate Ln S/B	-	E	1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F	1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		9.2		Total Delay for Signalled Lanes (pcuHr):		14.32		Cycle Time (s): 70					
				PRC Over All Lanes (%):		9.2		Total Delay Over All Lanes(pcuHr):		18.75							



Basic Results Summary

Scenario 8: '2019 DS2 PM Base' (FG8: '2019 DS2 PM Base', Plan 1: 'Plan 1')

Network Layout Diagram

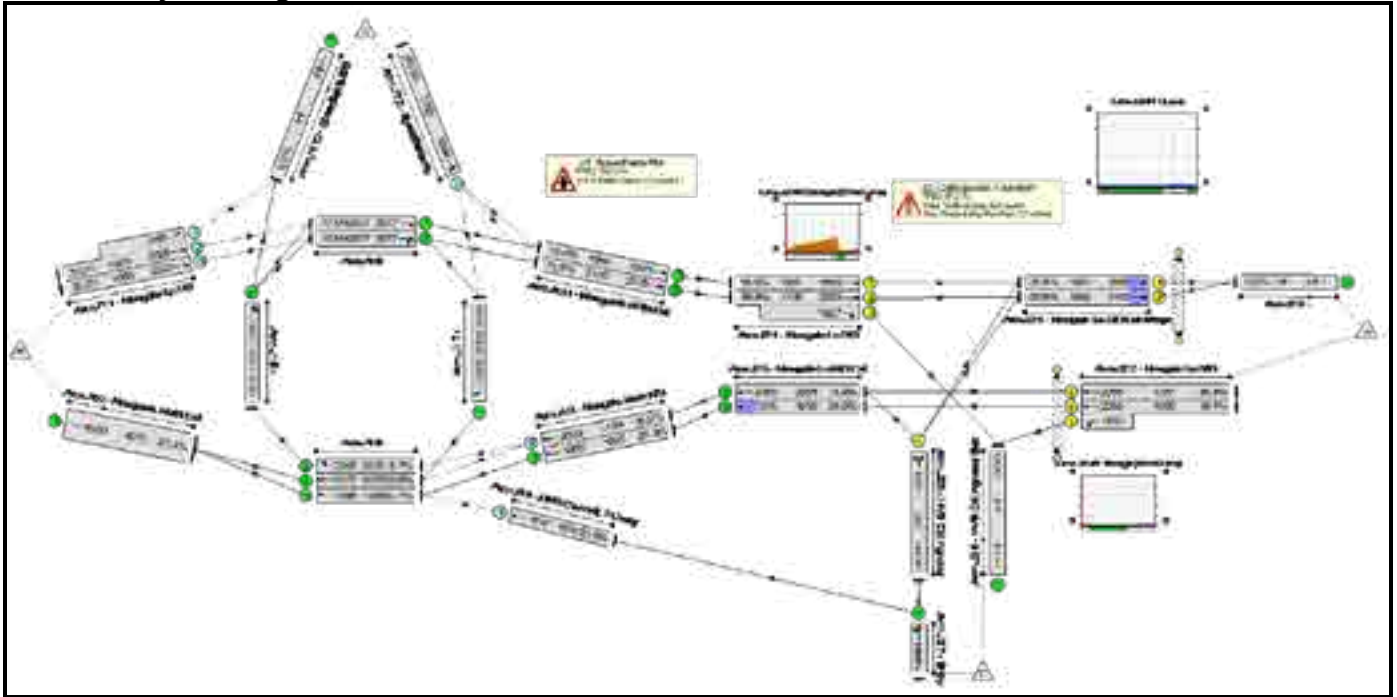

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	731	151	10	892
	B	645	0	254	69	968
	C	116	261	0	7	384
	D	69	124	23	0	216
	Tot.	830	1116	428	86	2460

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	48.1%	2501	0	0	11.1	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	35.9%	2501	0	0	2.5	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	618	2029:1786	1878	32.9%	1236	0	0	0.2	1.4	0.2	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	350	2029	1088	32.2%	350	0	0	0.2	2.4	0.2	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	384	1894	1342	28.6%	384	0	0	0.2	1.9	0.2	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	498	1965	1965	25.3%	-	-	-	0.2	1.2	0.2	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	407	2029	1134	35.9%	407	0	0	0.3	3.0	4.5	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	124	1747	605	20.5%	124	0	0	0.1	3.7	0.1	-
5/1	Right Ahead	U	-		-	-	-	174	2077	2077	8.4%	-	-	-	0.0	0.9	0.0	-
6/1	Ahead	U	-		-	-	-	364	2077	2077	17.5%	-	-	-	0.1	1.1	0.1	-
6/2	Right Ahead	U	-		-	-	-	350	2077	2077	16.9%	-	-	-	0.1	1.0	0.1	-
7/1	Right	U	-		-	-	-	261	2005	2005	13.0%	-	-	-	0.1	1.0	0.1	-
8/1	Ahead	U	-		-	-	-	622	1965	1965	31.7%	-	-	-	0.2	1.3	0.2	-
8/2	Ahead	U	-		-	-	-	494	2077	2077	23.8%	-	-	-	0.2	1.1	0.2	-
8/3	Right	U	-		-	-	-	174	2005	2005	8.7%	-	-	-	0.0	1.0	0.0	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1116	4070	4070	27.4%	-	-	-	0.2	0.6	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	382	1965	1965	19.4%	-	-	-	0.1	1.1	0.1	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	455	2105	2105	21.6%	-	-	-	0.1	1.1	0.1	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>48.1%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>8.5</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	382	1915	985	38.8%	-	-	-	1.4	13.3	4.8	3.4
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	455	2055:1827	1238	36.8%	-	-	-	1.9	15.2	4.6	3.4
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	508	2055:1702	1056	48.1%	-	-	-	2.0	14.1	6.7	4.4
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	384	2055	1057	36.3%	-	-	-	1.4	12.8	4.7	3.4
3/1	HMS Collingwood Right Left	U	D		1	7	-	92	1811	207	44.5%	-	-	-	1.1	44.5	2.1	1.5
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	385	1965	1544	24.9%	-	-	-	0.2	1.7	0.3	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	445	2105	1654	26.9%	-	-	-	0.2	1.6	0.3	0.1
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	498	1915	1915	26.0%	-	-	-	0.2	1.4	0.4	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	407	2055	2055	19.8%	-	-	-	0.1	1.1	0.1	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		87.2		Total Delay for Signalled Lanes (pcuHr):				8.22		Cycle Time (s): 70				
				PRC Over All Lanes (%):		87.2		Total Delay Over All Lanes(pcuHr):				11.07						

Basic Results Summary

Scenario 9: '2024 DS2 AM Base' (FG9: '2024 DS2 AM Base', Plan 1: 'Plan 1')

Network Layout Diagram

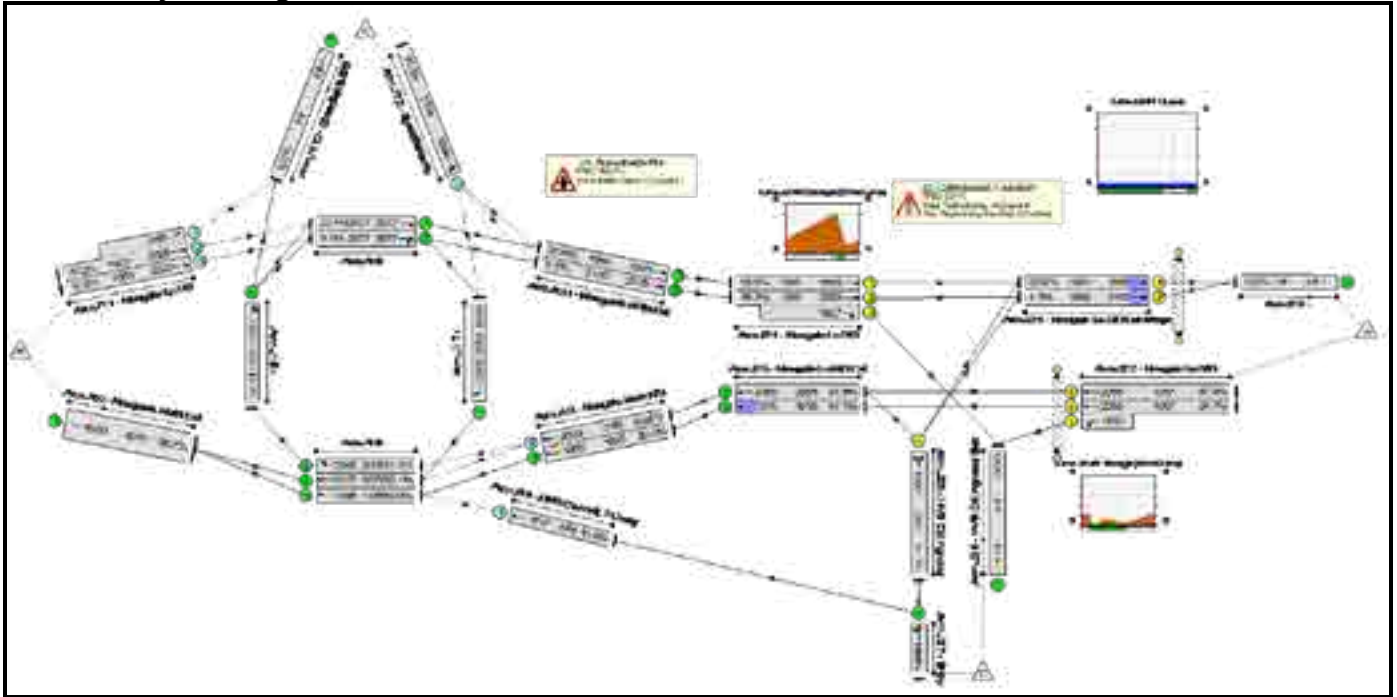

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	1263	216	149	1628
	B	481	0	245	188	914
	C	43	170	0	11	224
	D	17	59	6	0	82
	Tot.	541	1492	467	348	2848

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	<b>84.7%</b>	<b>2639</b>	<b>0</b>	<b>0</b>	<b>20.4</b>	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	<b>60.6%</b>	<b>2639</b>	<b>0</b>	<b>0</b>	<b>4.2</b>	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	724	2029:1786	1602	45.2%	1448	0	0	0.4	2.0	0.4	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	190	2029	1060	17.9%	190	0	0	0.1	2.1	0.1	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	224	1894	1374	16.3%	224	0	0	0.1	1.6	0.1	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	767	1965	1965	39.0%	-	-	-	0.3	1.5	0.3	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	718	2029	1185	60.6%	718	0	0	1.7	8.6	13.7	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	59	1747	546	10.8%	59	0	0	0.1	3.7	0.1	-
5/1	Right Ahead	U	-		-	-	-	222	2077	2077	10.7%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	479	2077	2077	23.1%	-	-	-	0.1	1.1	0.1	-
6/2	Right Ahead	U	-		-	-	-	190	2077	2077	9.1%	-	-	-	0.1	1.0	0.1	-
7/1	Right	U	-		-	-	-	170	2005	2005	8.5%	-	-	-	0.0	1.0	0.0	-
8/1	Ahead	U	-		-	-	-	826	1965	1965	42.0%	-	-	-	0.4	1.6	0.4	-
8/2	Ahead	U	-		-	-	-	666	2077	2077	32.1%	-	-	-	0.2	1.3	0.2	-
8/3	Right	U	-		-	-	-	222	2005	2005	11.1%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1492	4070	4070	36.7%	-	-	-	0.3	0.7	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	522	1965	1965	26.6%	-	-	-	0.2	1.2	0.2	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	201	2105	2105	9.5%	-	-	-	0.1	0.9	0.1	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>84.7%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>16.2</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	522	1915	985	53.0%	-	-	-	2.2	15.2	7.2	4.6
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	201	2055:1827	264	76.2%	-	-	-	3.1	56.1	5.2	0.9
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	916	2055:1702	1081	84.7%	-	-	-	6.2	24.2	16.7	7.1
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	712	2055	1057	67.4%	-	-	-	3.5	17.8	11.3	6.3
3/1	HMS Collingwood Right Left	U	D		1	7	-	23	1810	207	11.1%	-	-	-	0.2	37.7	0.5	0.4
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	522	1965	1544	33.8%	-	-	-	0.3	1.9	0.4	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	19	2105	1654	1.1%	-	-	-	0.0	1.1	0.0	0.0
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	767	1915	1915	40.1%	-	-	-	0.3	1.6	0.5	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	718	2055	2055	34.9%	-	-	-	0.3	1.3	0.3	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):				6.2	Total Delay for Signalled Lanes (pcuHr):				15.56	Cycle Time (s):				70
				PRC Over All Lanes (%):				6.2	Total Delay Over All Lanes(pcuHr):				20.38					

Basic Results Summary

Scenario 10: '2024 DS2 PM Base' (FG10: '2024 DS2 PM Base', Plan 1: 'Plan 1')

Network Layout Diagram

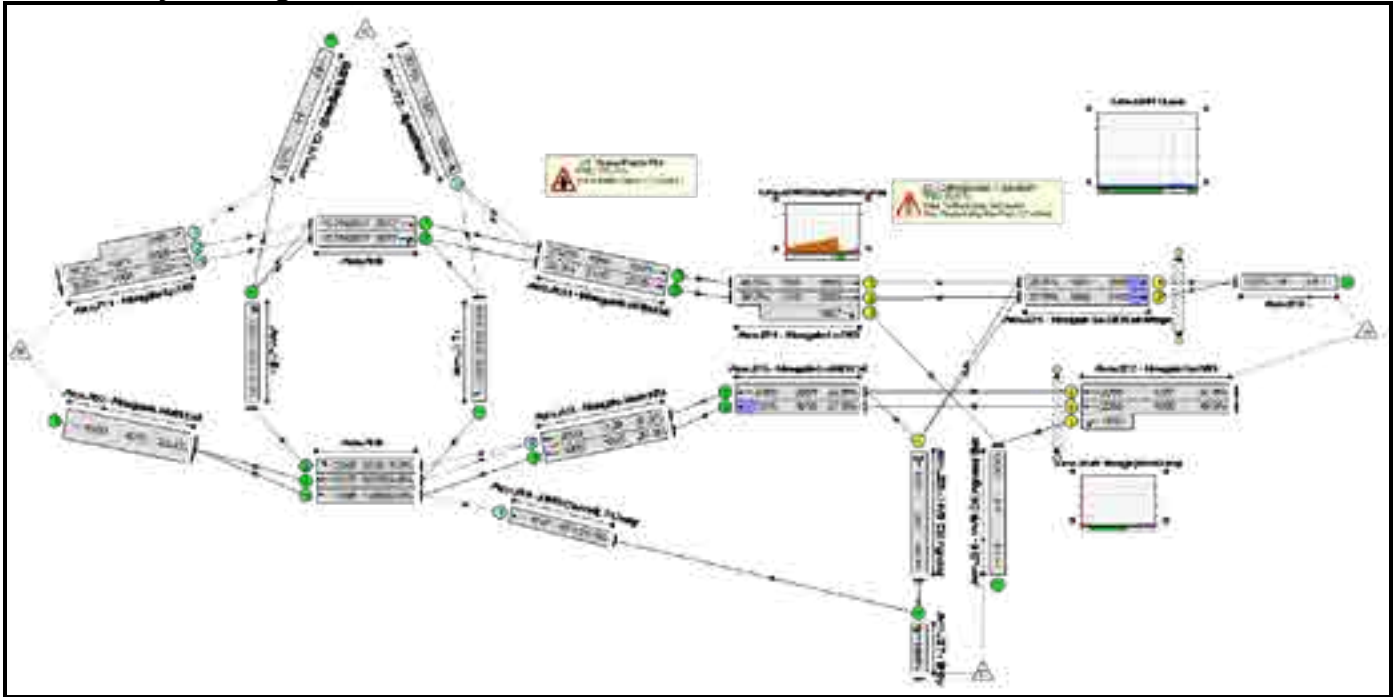

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	757	157	10	924
	B	669	0	263	71	1003
	C	120	271	0	7	398
	D	72	129	24	0	225
	Tot.	861	1157	444	88	2550

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	49.9%	2591	0	0	11.6	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	37.3%	2591	0	0	2.7	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	640	2029:1786	1873	34.2%	1280	0	0	0.3	1.5	0.3	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	363	2029	1084	33.5%	363	0	0	0.3	2.5	0.3	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	398	1894	1323	30.1%	398	0	0	0.2	1.9	0.2	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	517	1965	1965	26.3%	-	-	-	0.2	1.2	0.2	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	421	2029	1129	37.3%	421	0	0	0.4	3.2	4.8	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	129	1747	601	21.5%	129	0	0	0.1	3.8	0.1	-
5/1	Right Ahead	U	-		-	-	-	181	2077	2077	8.7%	-	-	-	0.0	0.9	0.0	-
6/1	Ahead	U	-		-	-	-	377	2077	2077	18.2%	-	-	-	0.1	1.1	0.1	-
6/2	Right Ahead	U	-		-	-	-	363	2077	2077	17.5%	-	-	-	0.1	1.1	0.1	-
7/1	Right	U	-		-	-	-	271	2005	2005	13.5%	-	-	-	0.1	1.0	0.1	-
8/1	Ahead	U	-		-	-	-	646	1965	1965	32.9%	-	-	-	0.2	1.4	0.2	-
8/2	Ahead	U	-		-	-	-	511	2077	2077	24.6%	-	-	-	0.2	1.1	0.2	-
8/3	Right	U	-		-	-	-	181	2005	2005	9.0%	-	-	-	0.0	1.0	0.0	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1157	4070	4070	28.4%	-	-	-	0.2	0.6	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	397	1965	1965	20.2%	-	-	-	0.1	1.1	0.1	-




Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	470	2105	2105	22.3%	-	-	-	0.1	1.1	0.1	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>49.9%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>9.0</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	397	1915	985	40.3%	-	-	-	1.5	13.5	5.0	3.5
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	470	2055:1827	1237	38.0%	-	-	-	2.0	15.3	4.9	3.5
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	527	2055:1702	1056	49.9%	-	-	-	2.1	14.4	7.0	4.6
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	397	2055	1057	37.6%	-	-	-	1.4	13.0	4.9	3.5
3/1	HMS Collingwood Right Left	U	D		1	7	-	96	1811	207	46.4%	-	-	-	1.2	45.1	2.2	1.6
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	400	1965	1544	25.9%	-	-	-	0.2	1.7	0.3	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	461	2105	1654	27.9%	-	-	-	0.2	1.6	0.3	0.1
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	517	1915	1915	27.0%	-	-	-	0.2	1.4	0.4	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	421	2055	2055	20.5%	-	-	-	0.1	1.1	0.1	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		80.4		Total Delay for Signalled Lanes (pcuHr):		8.63		Cycle Time (s): 70						
				PRC Over All Lanes (%):		80.4		Total Delay Over All Lanes(pcuHr):		11.65								

Basic Results Summary

Scenario 11: '2024 DS2 AM Base + Development' (FG11: '2024 DS2 AM Base + Dev', Plan 1: 'Plan 1')

Network Layout Diagram

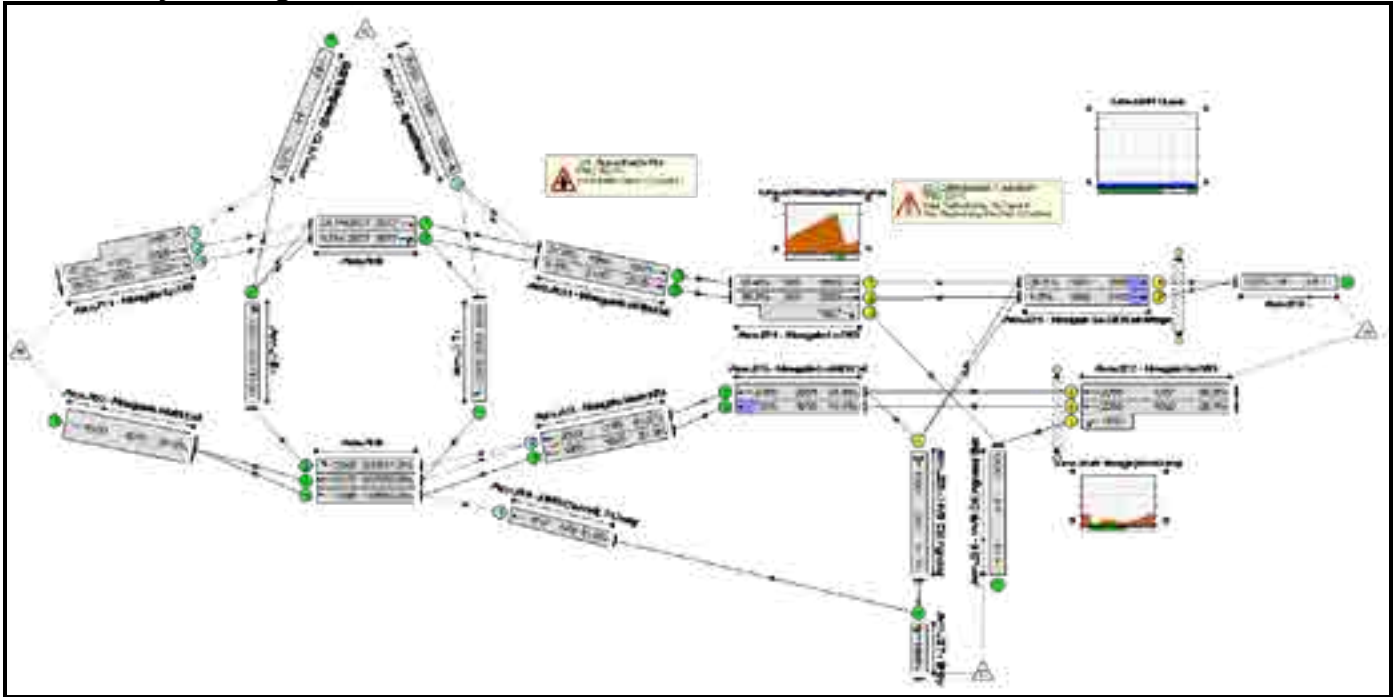

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	1278	219	151	1648
	B	504	0	245	188	937
	C	45	170	0	11	226
	D	17	59	6	0	82
	Tot.	566	1507	470	350	2893

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	85.4%	2698	0	0	21.1	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	61.6%	2698	0	0	4.4	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	746	2029:1786	1576	47.3%	1492	0	0	0.4	2.2	0.4	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	191	2029	1058	18.0%	191	0	0	0.1	2.1	0.1	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	226	1894	1358	16.6%	226	0	0	0.1	1.6	0.1	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	773	1965	1965	39.3%	-	-	-	0.3	1.5	0.3	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	730	2029	1185	61.6%	730	0	0	1.8	8.9	14.0	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	59	1747	545	10.8%	59	0	0	0.1	3.7	0.1	-
5/1	Right Ahead	U	-		-	-	-	225	2077	2077	10.8%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	501	2077	2077	24.1%	-	-	-	0.2	1.1	0.2	-
6/2	Right Ahead	U	-		-	-	-	191	2077	2077	9.2%	-	-	-	0.1	1.0	0.1	-
7/1	Right	U	-		-	-	-	170	2005	2005	8.5%	-	-	-	0.0	1.0	0.0	-
8/1	Ahead	U	-		-	-	-	832	1965	1965	42.3%	-	-	-	0.4	1.6	0.4	-
8/2	Ahead	U	-		-	-	-	675	2077	2077	32.5%	-	-	-	0.2	1.3	0.2	-
8/3	Right	U	-		-	-	-	225	2005	2005	11.2%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1507	4070	4070	37.0%	-	-	-	0.3	0.7	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	546	1965	1965	27.8%	-	-	-	0.2	1.3	0.2	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	202	2105	2105	9.6%	-	-	-	0.1	0.9	0.1	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>85.4%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>16.7</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	546	1915	985	55.4%	-	-	-	2.4	15.6	7.7	4.9
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	202	2055:1827	265	76.2%	-	-	-	3.1	55.8	5.2	0.9
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	924	2055:1702	1082	85.4%	-	-	-	6.4	24.8	17.0	7.2
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	724	2055	1057	68.5%	-	-	-	3.6	18.1	11.5	6.4
3/1	HMS Collingwood Right Left	U	D		1	7	-	23	1810	207	11.1%	-	-	-	0.2	37.7	0.5	0.4
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	546	1965	1544	35.4%	-	-	-	0.3	2.0	0.4	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	20	2105	1654	1.2%	-	-	-	0.0	1.1	0.0	0.0
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	773	1915	1915	40.4%	-	-	-	0.4	1.6	0.5	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	730	2055	2055	35.5%	-	-	-	0.3	1.4	0.3	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		5.3		Total Delay for Signalled Lanes (pcuHr):		16.07		Cycle Time (s): 70						
				PRC Over All Lanes (%):		5.3		Total Delay Over All Lanes(pcuHr):		21.08								

Basic Results Summary

Scenario 12: '2024 DS2 PM Base + Development' (FG12: '2024 DS2 PM Base + Dev', Plan 1: 'Plan 1')

Network Layout Diagram

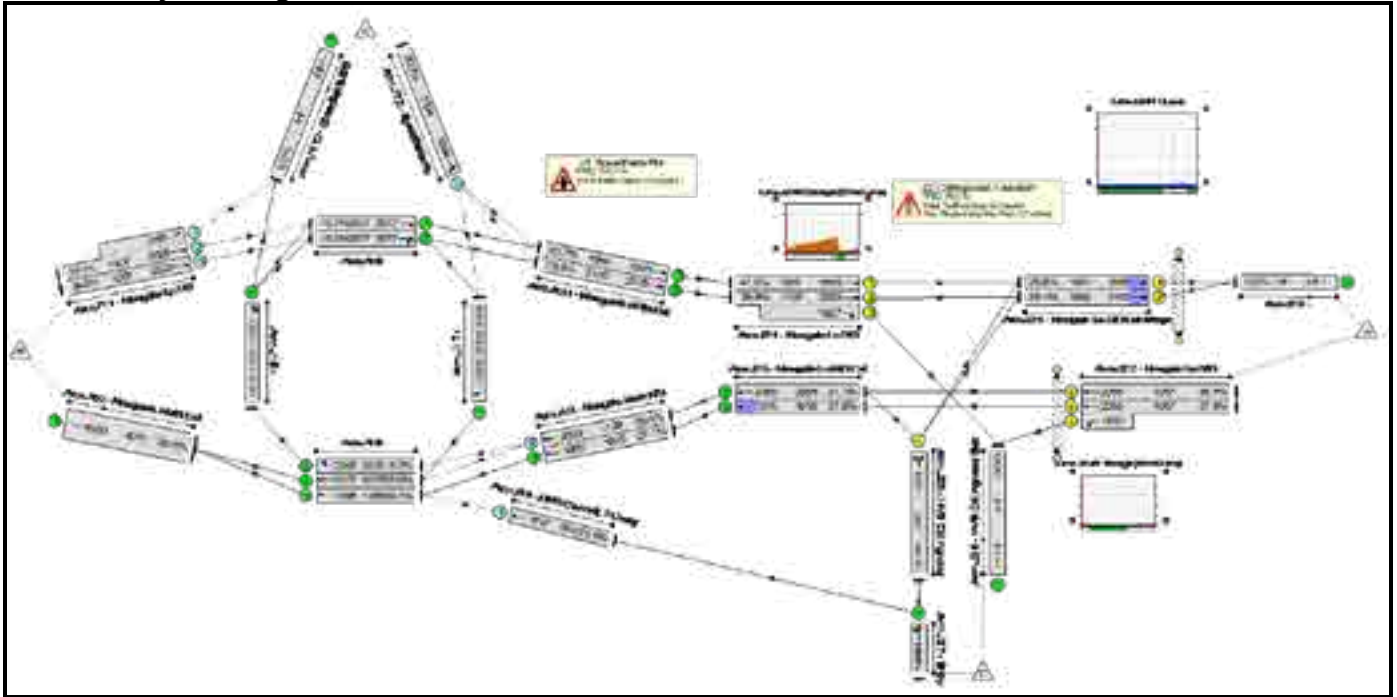

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	0	781	161	11	953
	B	695	0	263	71	1029
	C	123	271	0	7	401
	D	73	129	24	0	226
	Tot.	891	1181	448	89	2609

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	51.5%	2644	0	0	12.1	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	38.4%	2644	0	0	2.8	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	652	2029:1786	1857	35.1%	1304	0	0	0.3	1.5	0.3	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	377	2029	1081	34.9%	377	0	0	0.3	2.6	0.3	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	401	1894	1304	30.7%	401	0	0	0.2	2.0	0.2	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	533	1965	1965	27.1%	-	-	-	0.2	1.3	0.2	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	433	2029	1129	38.4%	433	0	0	0.4	3.4	5.1	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	129	1747	598	21.6%	129	0	0	0.1	3.8	0.1	-
5/1	Right Ahead	U	-		-	-	-	185	2077	2077	8.9%	-	-	-	0.0	1.0	0.0	-
6/1	Ahead	U	-		-	-	-	389	2077	2077	18.7%	-	-	-	0.1	1.1	0.1	-
6/2	Right Ahead	U	-		-	-	-	377	2077	2077	18.2%	-	-	-	0.1	1.1	0.1	-
7/1	Right	U	-		-	-	-	271	2005	2005	13.5%	-	-	-	0.1	1.0	0.1	-
8/1	Ahead	U	-		-	-	-	662	1965	1965	33.7%	-	-	-	0.3	1.4	0.3	-
8/2	Ahead	U	-		-	-	-	519	2077	2077	25.0%	-	-	-	0.2	1.2	0.2	-
8/3	Right	U	-		-	-	-	185	2005	2005	9.2%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1181	4070	4070	29.0%	-	-	-	0.2	0.6	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	406	1965	1965	20.7%	-	-	-	0.1	1.2	0.1	-

Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	490	2105	2105	23.3%	-	-	-	0.2	1.1	0.2	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>51.5%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>9.3</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	406	1915	985	41.2%	-	-	-	1.5	13.6	5.2	3.6
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	490	2055:1827	1229	39.9%	-	-	-	2.1	15.4	5.1	3.7
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	544	2055:1702	1057	51.5%	-	-	-	2.2	14.6	7.4	4.7
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	409	2055	1057	38.7%	-	-	-	1.5	13.1	5.1	3.6
3/1	HMS Collingwood Right Left	U	D		1	7	-	97	1811	207	46.9%	-	-	-	1.2	45.3	2.2	1.6
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	410	1965	1544	26.6%	-	-	-	0.2	1.7	0.3	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	481	2105	1654	29.1%	-	-	-	0.2	1.7	0.3	0.1
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	533	1915	1915	27.8%	-	-	-	0.2	1.4	0.4	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	433	2055	2055	21.1%	-	-	-	0.1	1.1	0.1	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		74.8		Total Delay for Signalled Lanes (pcuHr):		8.97		Cycle Time (s): 70						
				PRC Over All Lanes (%):		74.8		Total Delay Over All Lanes(pcuHr):		12.11								

## **APPENDIX 11**


### **'HA2' DRAFT LOCAL PLAN ALLOCATED SITE DETAILS**



## DEVELOPMENT ALLOCATIONS



<b>Housing Site:</b> HA2	<b>SHLAA Reference:</b> 3133 (Incorporating 3002, 3028 and 3057)
<b>Name:</b> Newgate Lane South	<b>Proposed Use:</b> Residential
<b>Location:</b> Peel Common	<b>Indicative Capacity:</b> 475 dwellings
<b>Size:</b> 22.4ha	<b>Planning Status:</b> None

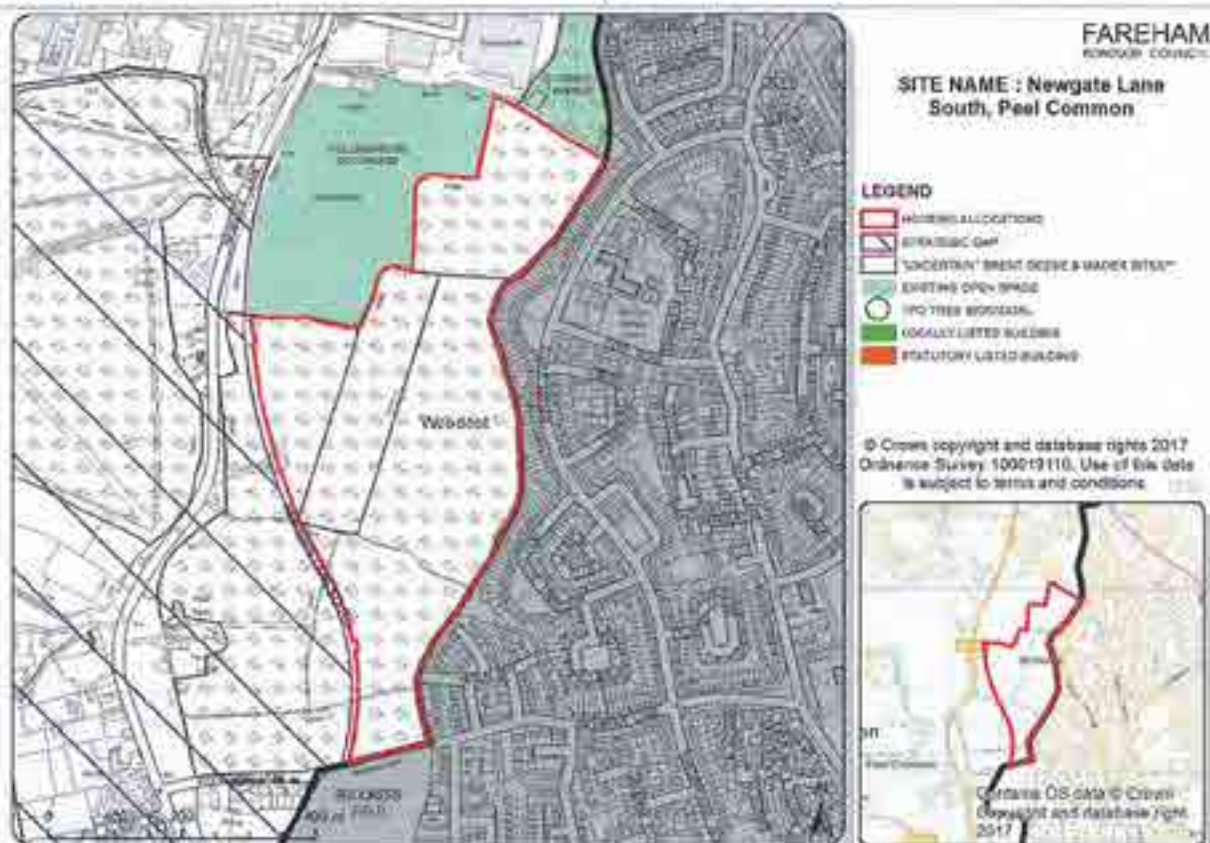

Planning permission will be granted provided that detailed proposals accord with the policies in the Local Plan and meet the following site specific requirements:

- a) The design and layout of proposals shall be informed by and be consistent with the Development Framework in Appendix D; and
- b) The quantum of housing proposed shall be broadly consistent with the indicative site capacity; and
- c) Primary highway access shall be focused on Newgate Lane South in the first instance, with Brookers Lane having the potential to provide secondary access for a limited number of dwellings, and
- d) The provision of a north-south natural greenspace buffer of 25 metres minimum width between proposed development and both the boundary of the Newgate Lane South highway and HMS Collingwood playing fields, in accordance with the Development Framework in Appendix D; and
- e) The provision of pedestrian and cycle connectivity between adjoining parcels as

## DEVELOPMENT ALLOCATIONS



identified by the Development Framework, as well as safe pedestrian/ cycle crossing points of Newgate Lane South, safe and accessible walking/ cycling routes to local schools, open spaces and nearby facilities in Woodcot/Bridgemary.

- f) The provision of vehicular highway access between individual development parcels, as identified by the Development Framework, without prejudice to adjacent land in accordance with Policy D4; and
- g) Building heights shall be limited to a maximum of 2.5 storeys, except for buildings which front onto Newgate Lane South and Bridgmary/Woodcot where building heights shall be limited to a maximum of 2 storeys; and
- h) Existing trees subject to a Tree Preservation Order should be retained and incorporated within the design and layout of proposals in a manner that does not impact on living conditions; and
- i) Existing drainage ditches on-site should be retained and enhanced as part of a Sustainable Drainage System (SuDS) incorporated within the overall green network for the site; and
- j) Proposals shall either provide directly, or provide the mechanism for the delivery of the following infrastructure, having regard to national legislation on pooling contributions:
  - Off-site highway improvement and mitigations works; and
  - Local schools and early-years childcare improvements (as identified by the Local Education Authority); and
  - A Neighbourhood Equipped Area of Play (NEAP) and a Multi-Use Games Area (MUGA) for older children on-site as shown on the Development Framework; and
  - Improvements to existing off-site sports facilities at Brookers Field and Tukes Avenue.

This site allocation is based around the delivery of the new section of highway known as Newgate Lane South. The road scheme is third stage of work on the Newgate Lane corridor, linking the improvements at the northern section of Newgate Lane, undertaken in 2014/15 and the Peel Common roundabout, in 2015/16. It replaces the existing route for through traffic. The scheme has both planning consent (P/15/0717/CC and 15/00382/HCC3) from Hampshire County Council and agreed funding from the Solent LEP. Furthermore, in summer 2017 construction of the new road commenced, with the works estimated to take approximately 12 months to complete. Once completed, the new road will form the western boundary of this site allocation.

The allocated land comprises a number of different site promoters. As such, the Council has composed a Development Framework (Appendix D) for the site which sets out the rationale and approach for achieving a comprehensive and coordinated development that allows for excellent connectivity throughout the site and to the surrounding area, whilst allowing for development to come forward on a phased basis.

The open space and equipped play space need has been derived when considering the overall quantum of development and how and where this can be best achieved within the overall comprehensive development.

## **APPENDIX 12**

### **2036 TRAFFIC FLOW AND DISTRIBUTION DIAGRAMS**

**2036 Base "DS1"**

AM - 0800 - 0900




Growth Rate: 1.1082

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

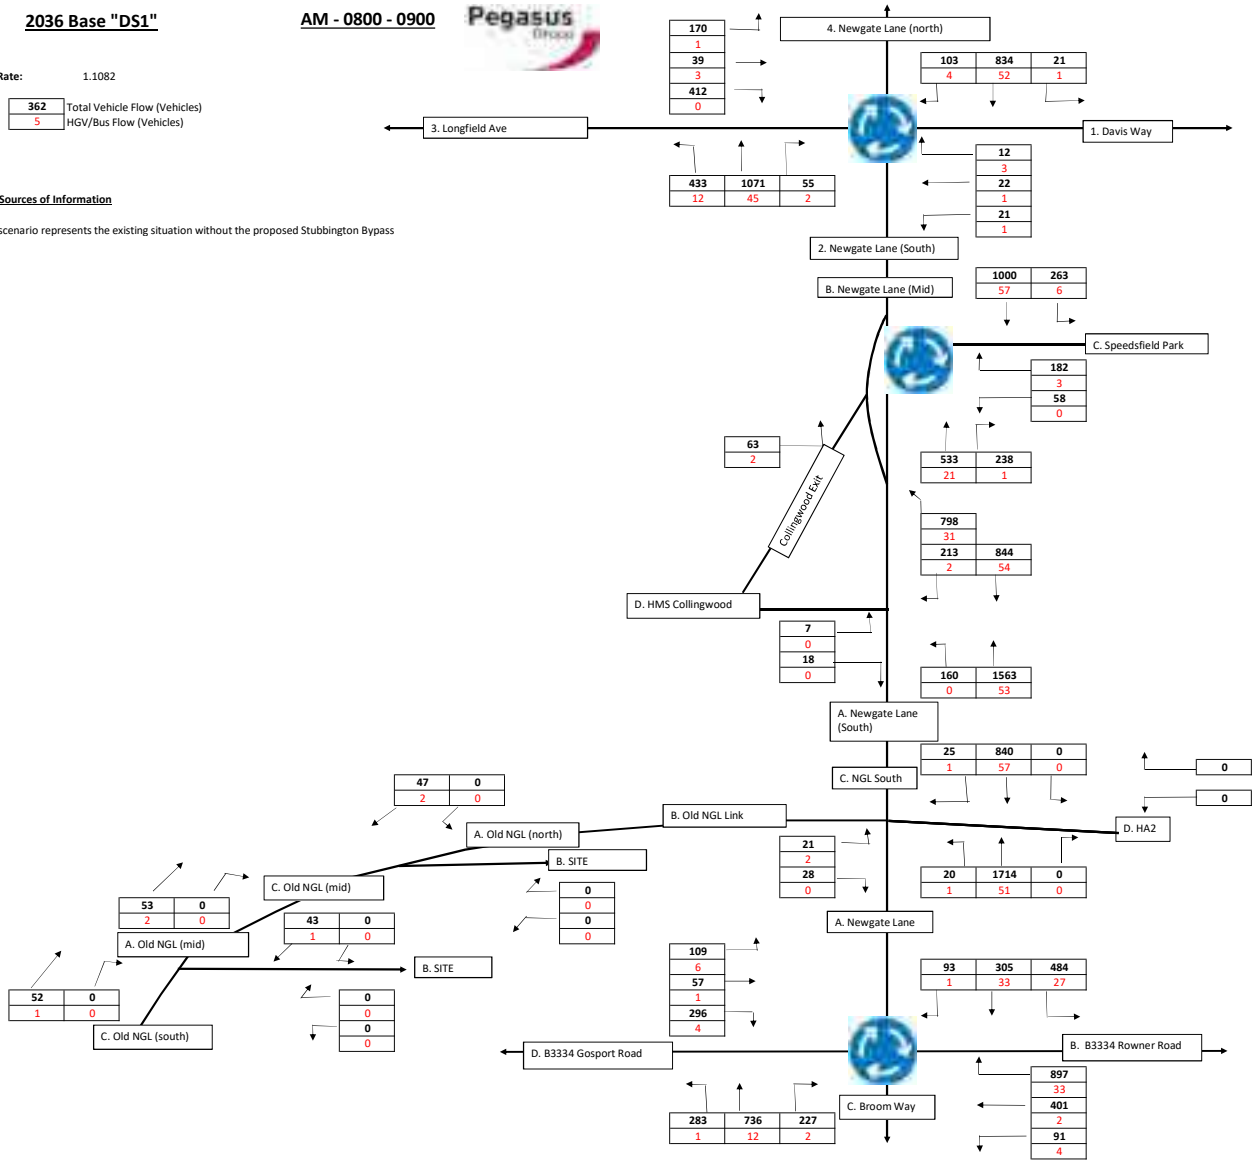

**2036 Base "DS1"**

PM - 1700 - 1800




Growth Rate: 1.1057

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

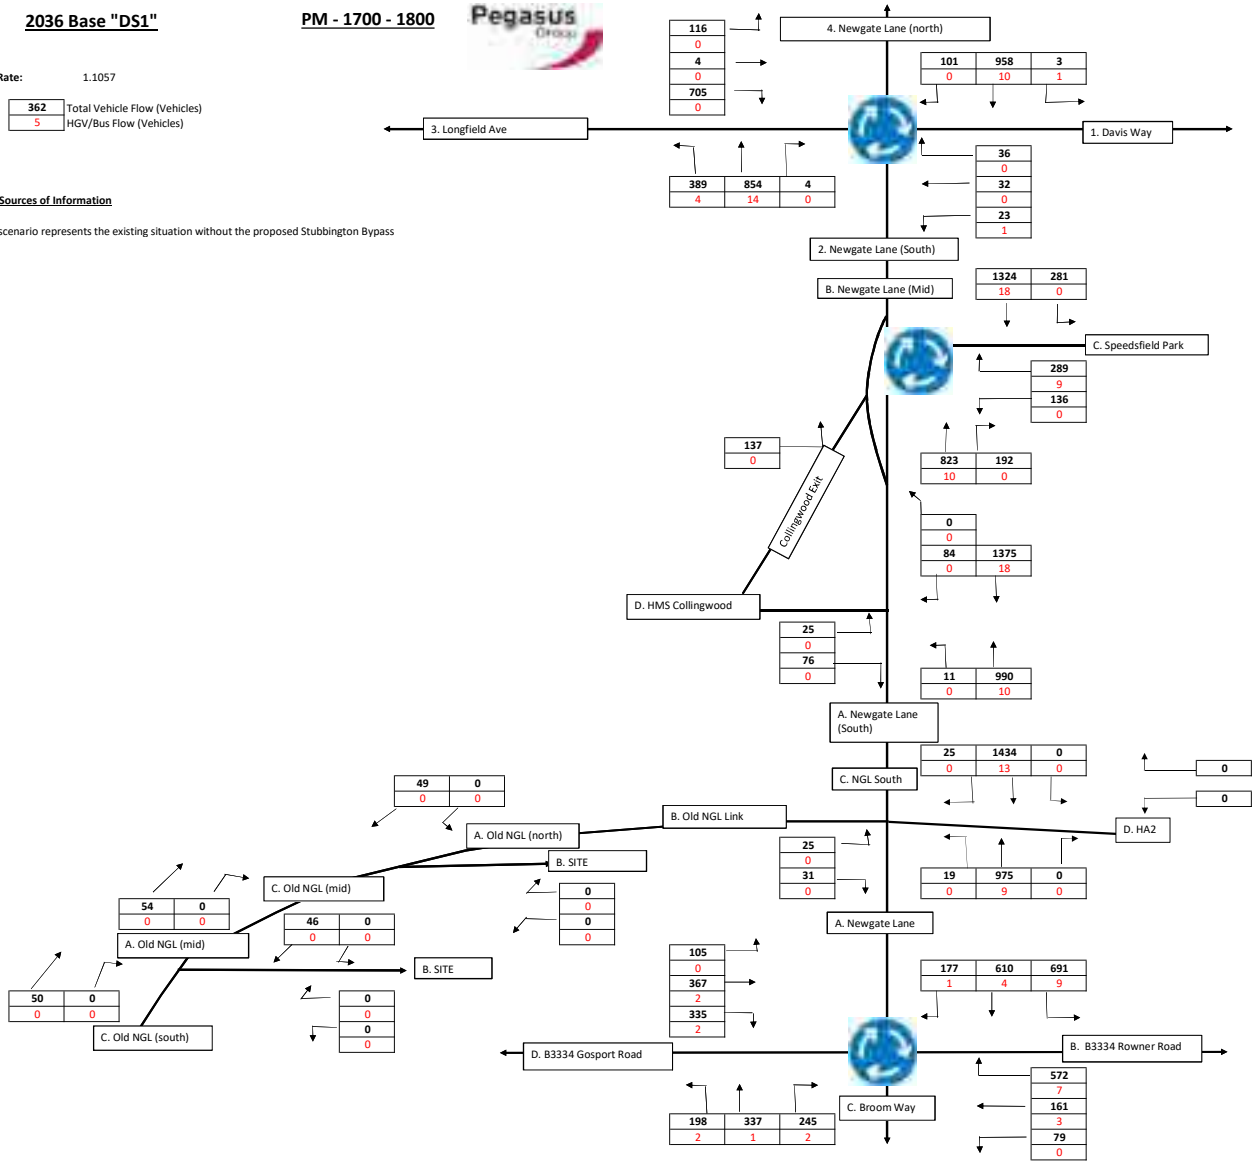

**2036 Base + Development "DS1"**

AM - 0800 - 0900




Growth Rate: 1.1082

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

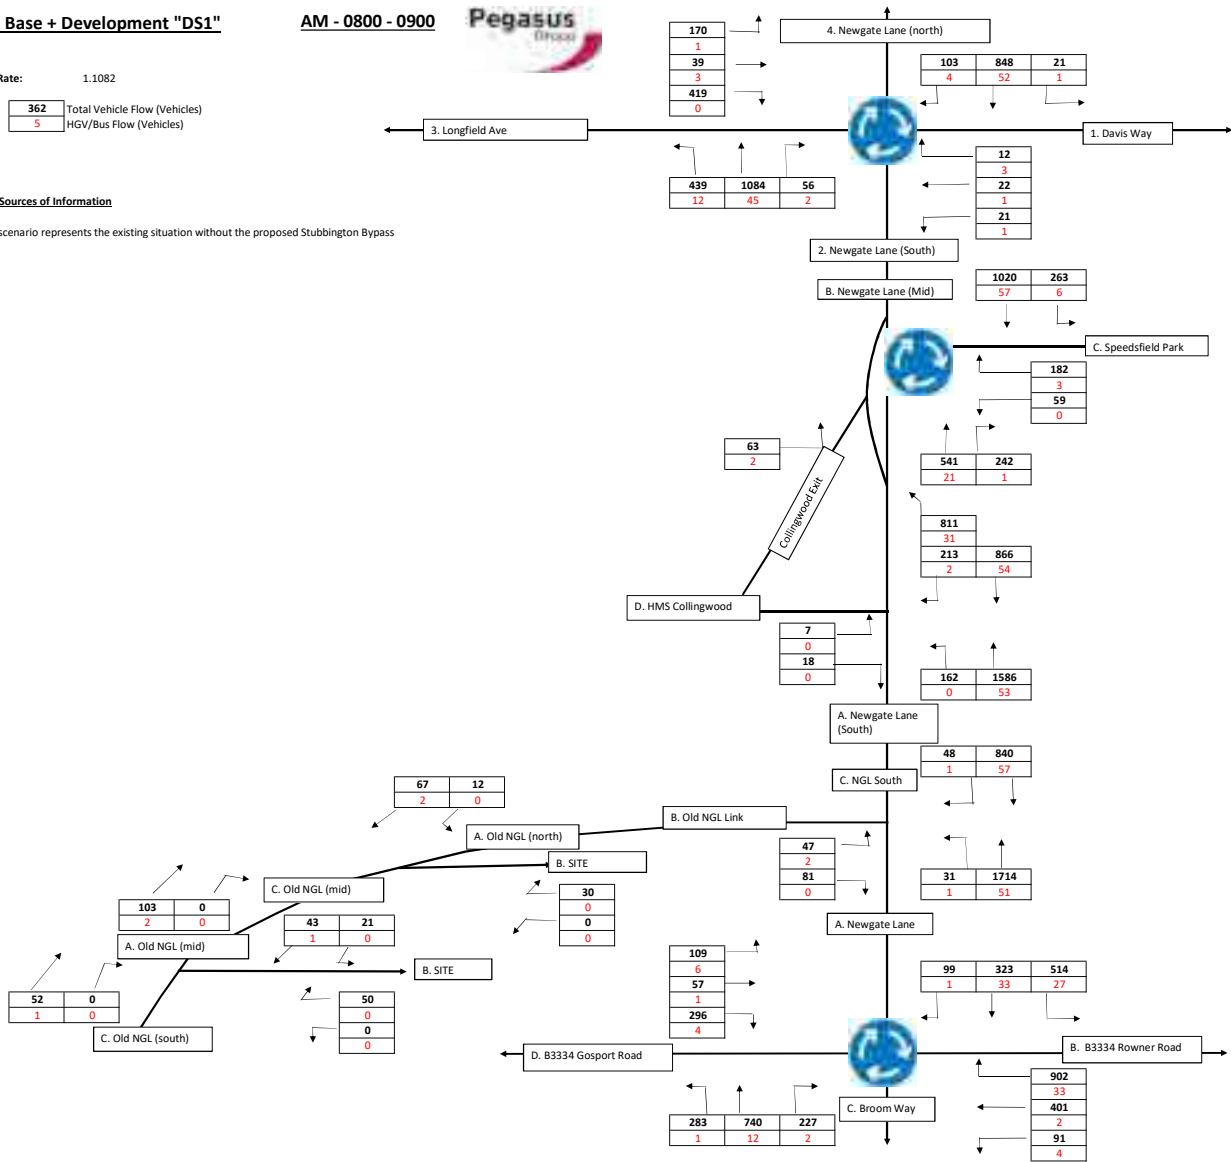

**2036 Base + Development "DS1"**

PM - 1700 - 1800




Growth Rate: 1.1057

Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

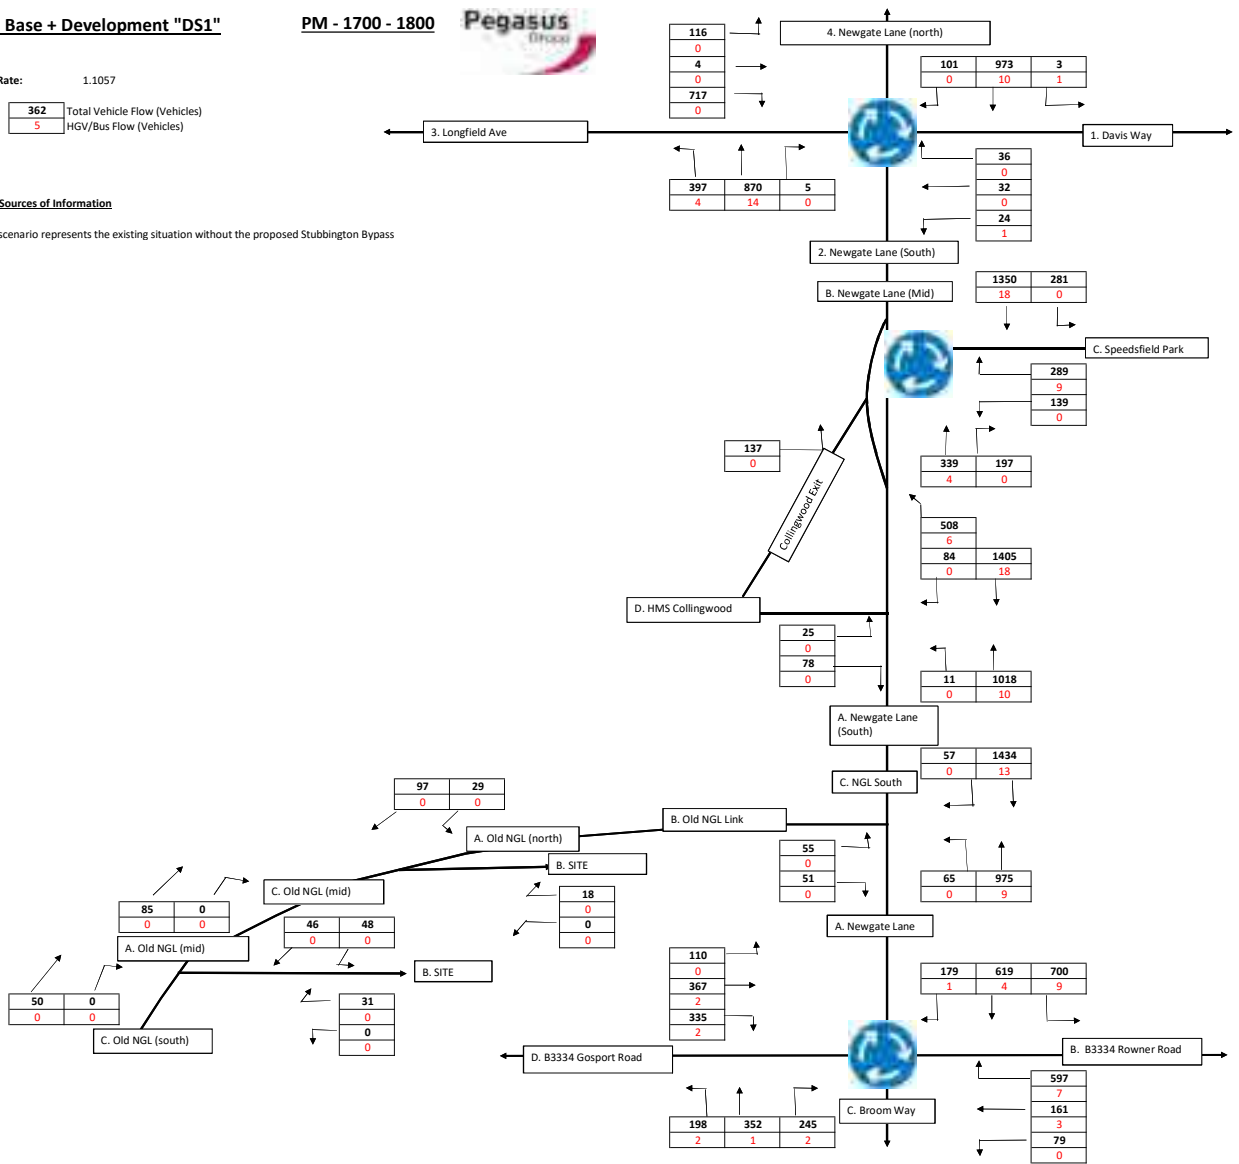

**2036 Base "DS2"**

AM - 0800 - 0900




Growth Rate: 1.1082

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

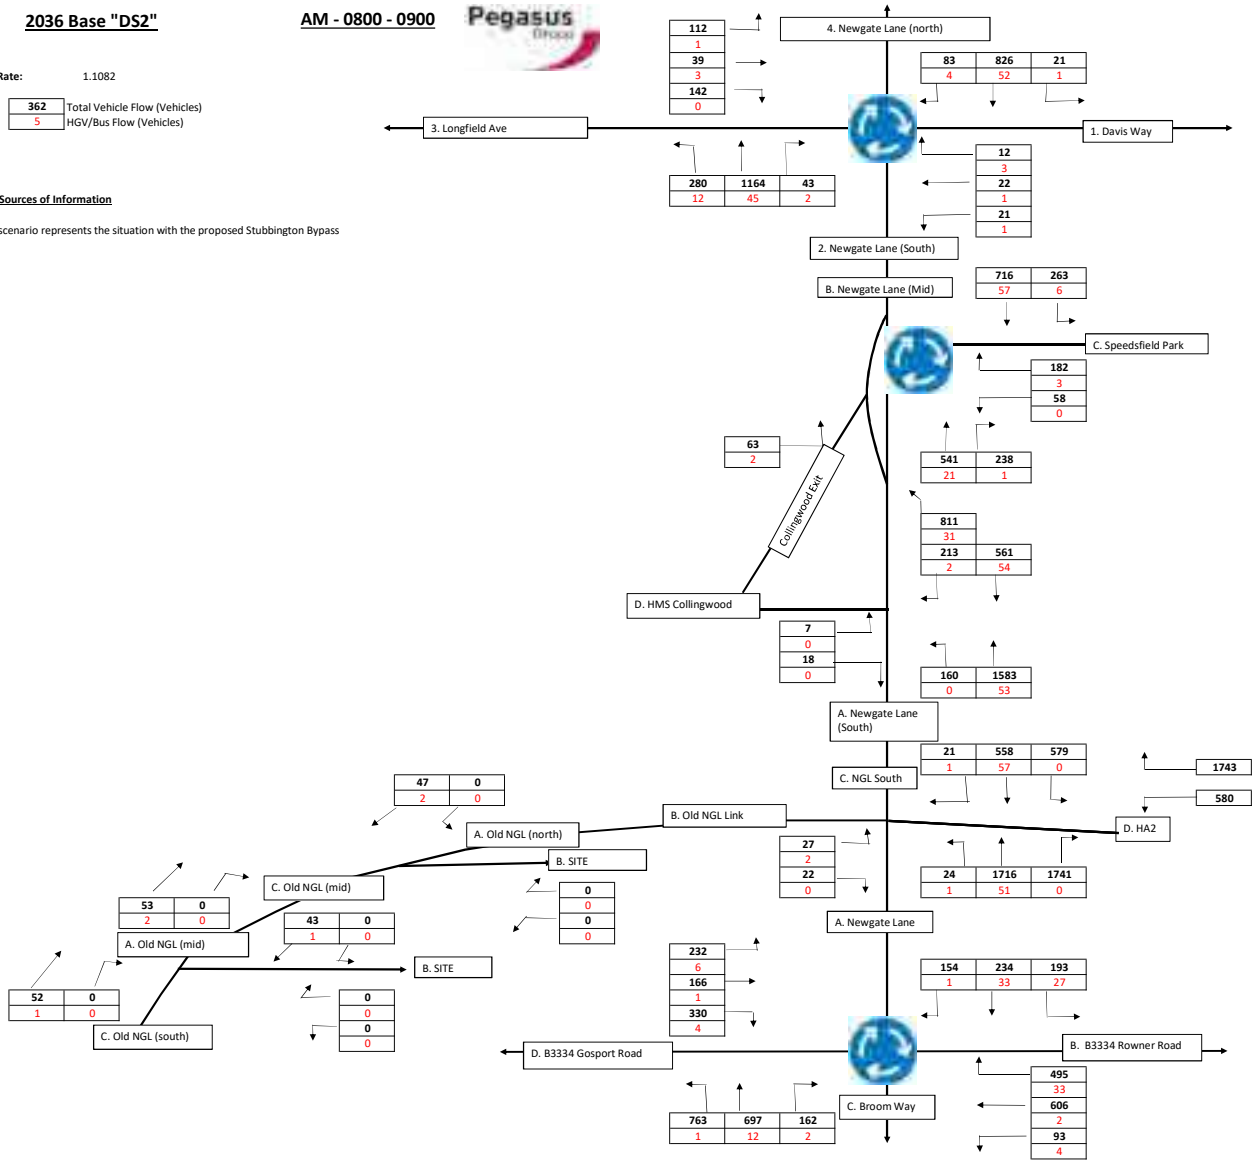



**2036 Base "DS2"**

PM - 1700 - 1800




Growth Rate: 1.1057

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

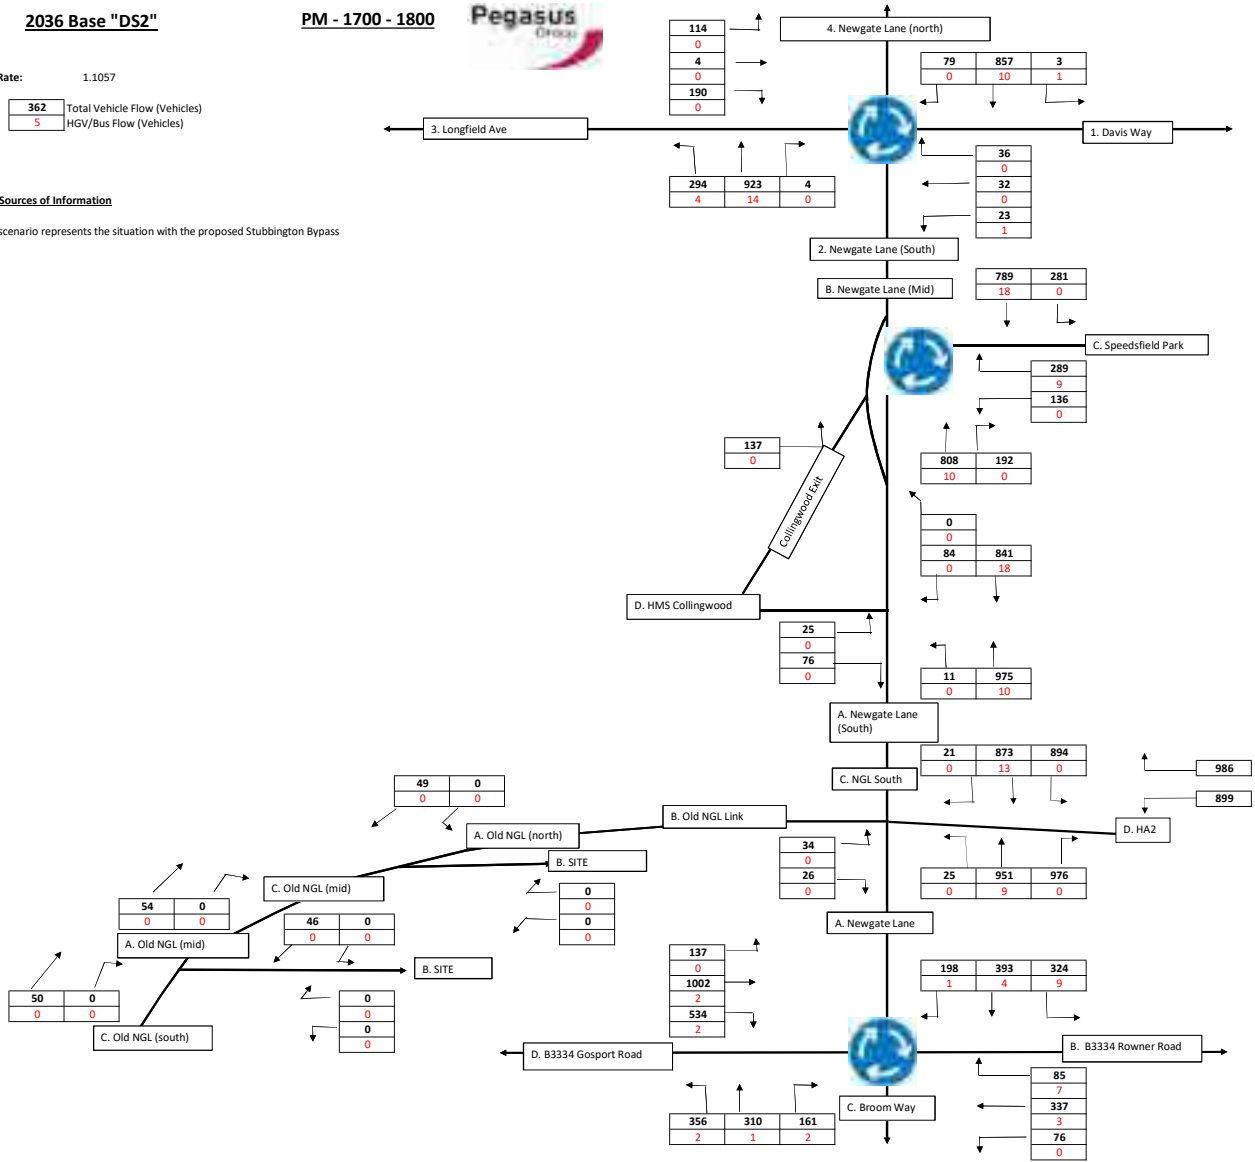

**2036 Base + Development "DS2"**

AM - 0800 - 0900




Growth Rate: 1.1082

Key:

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

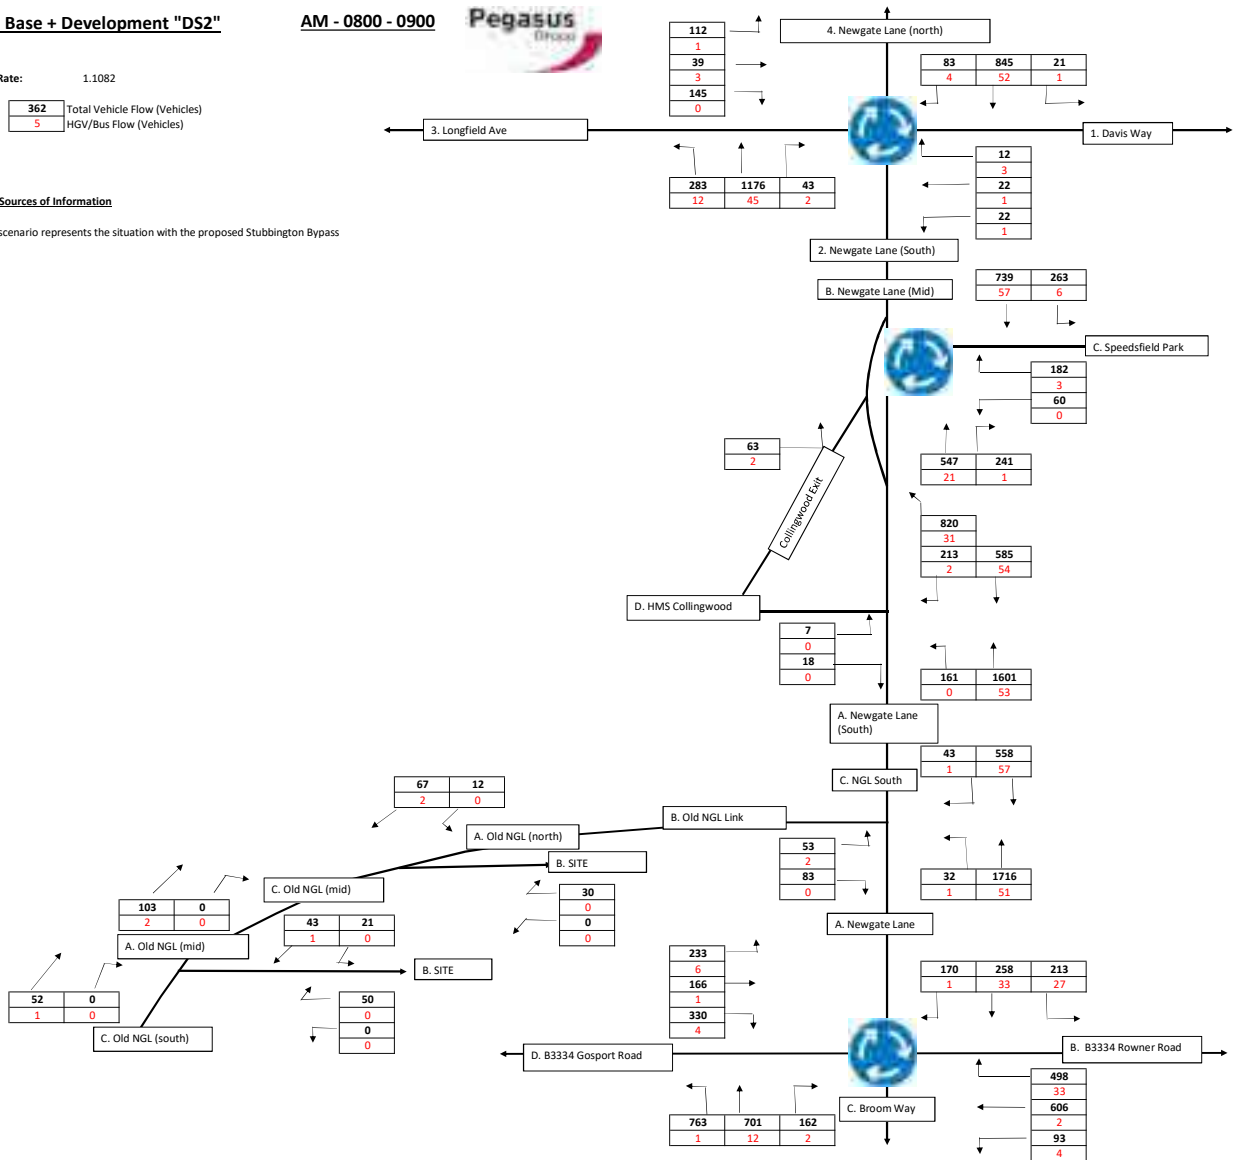

**2036 Base + Development "DS2"**

PM - 1700 - 1800




Growth Rate: 1.1057

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

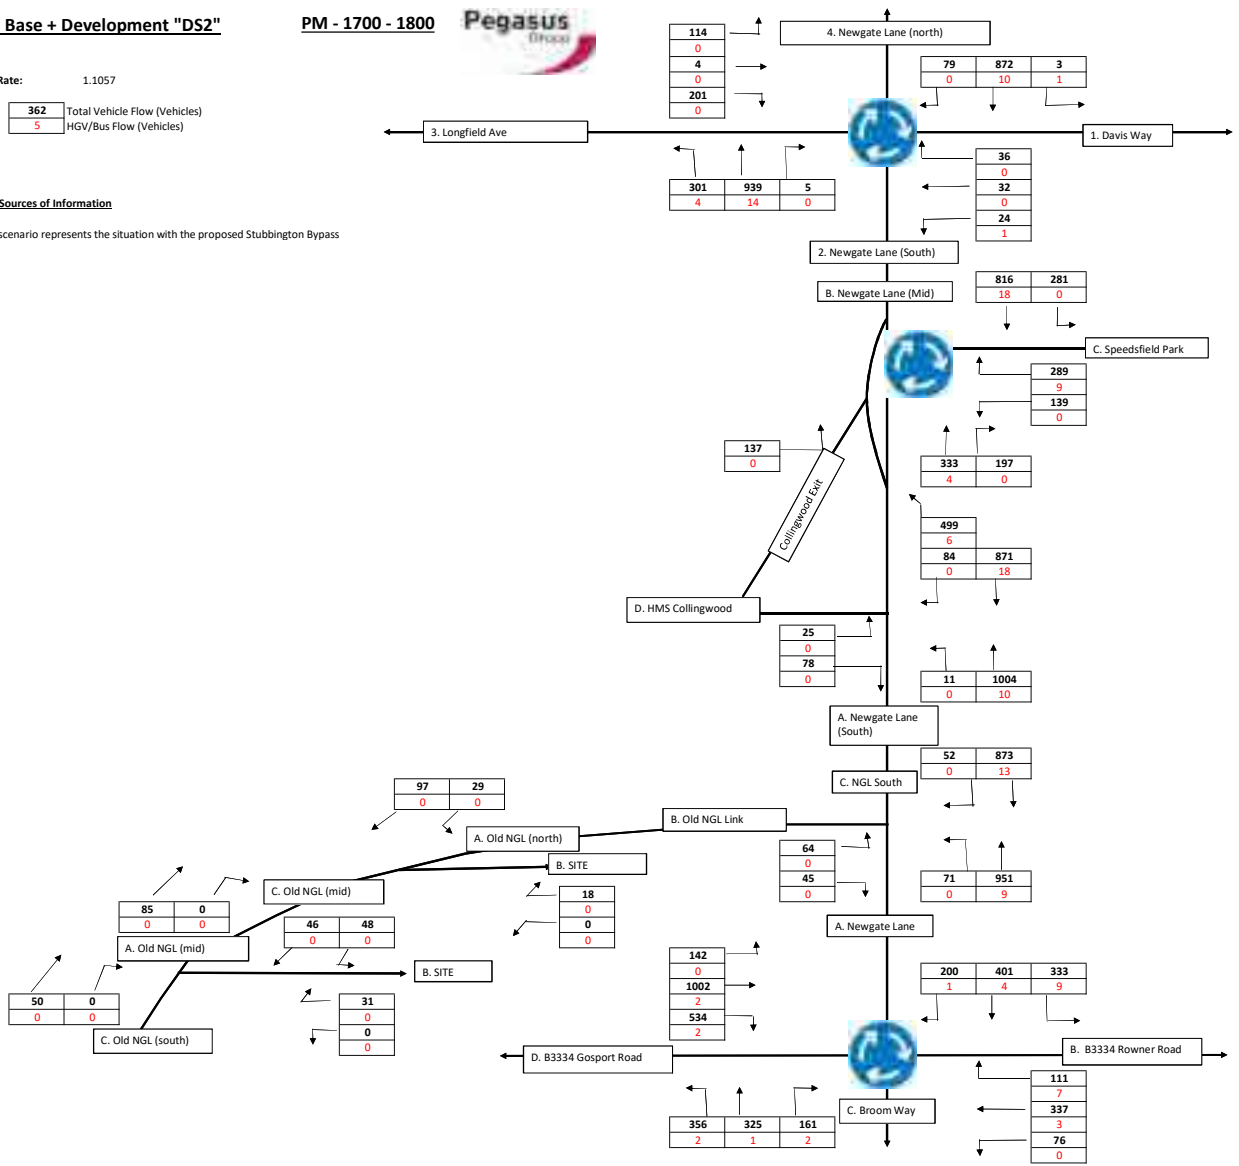

**"DS1" HA2 Trip Distribution**


AM - 0800 - 0900



Key: 19% % of development traffic

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass.

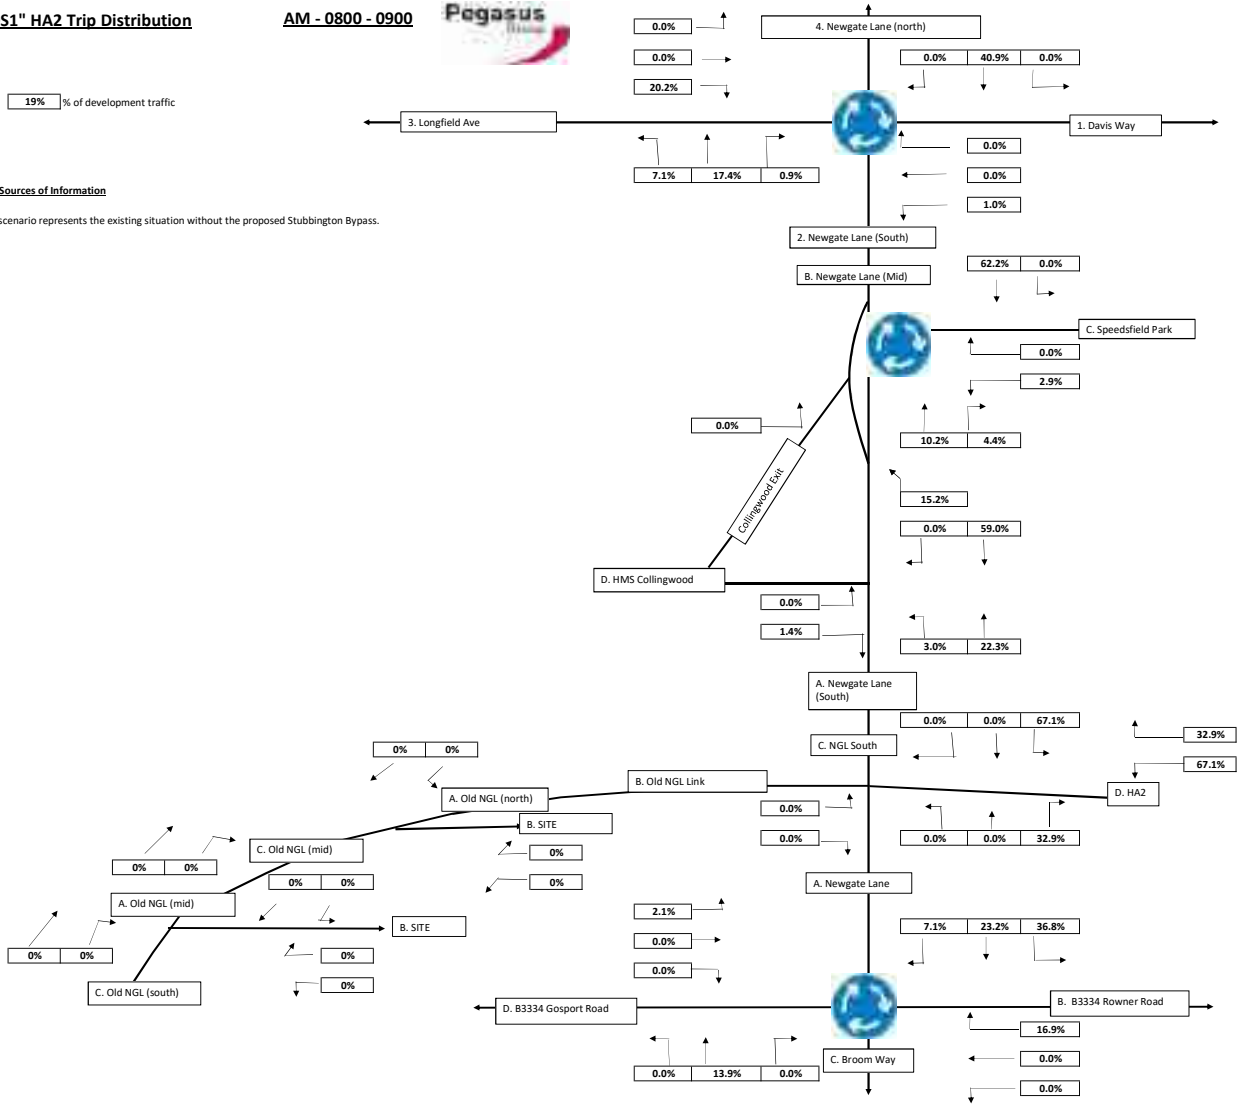

**"DS1" HA2 Trip Distribution**

PM - 1700 - 1800




Key:

19% % of development traffic

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass.

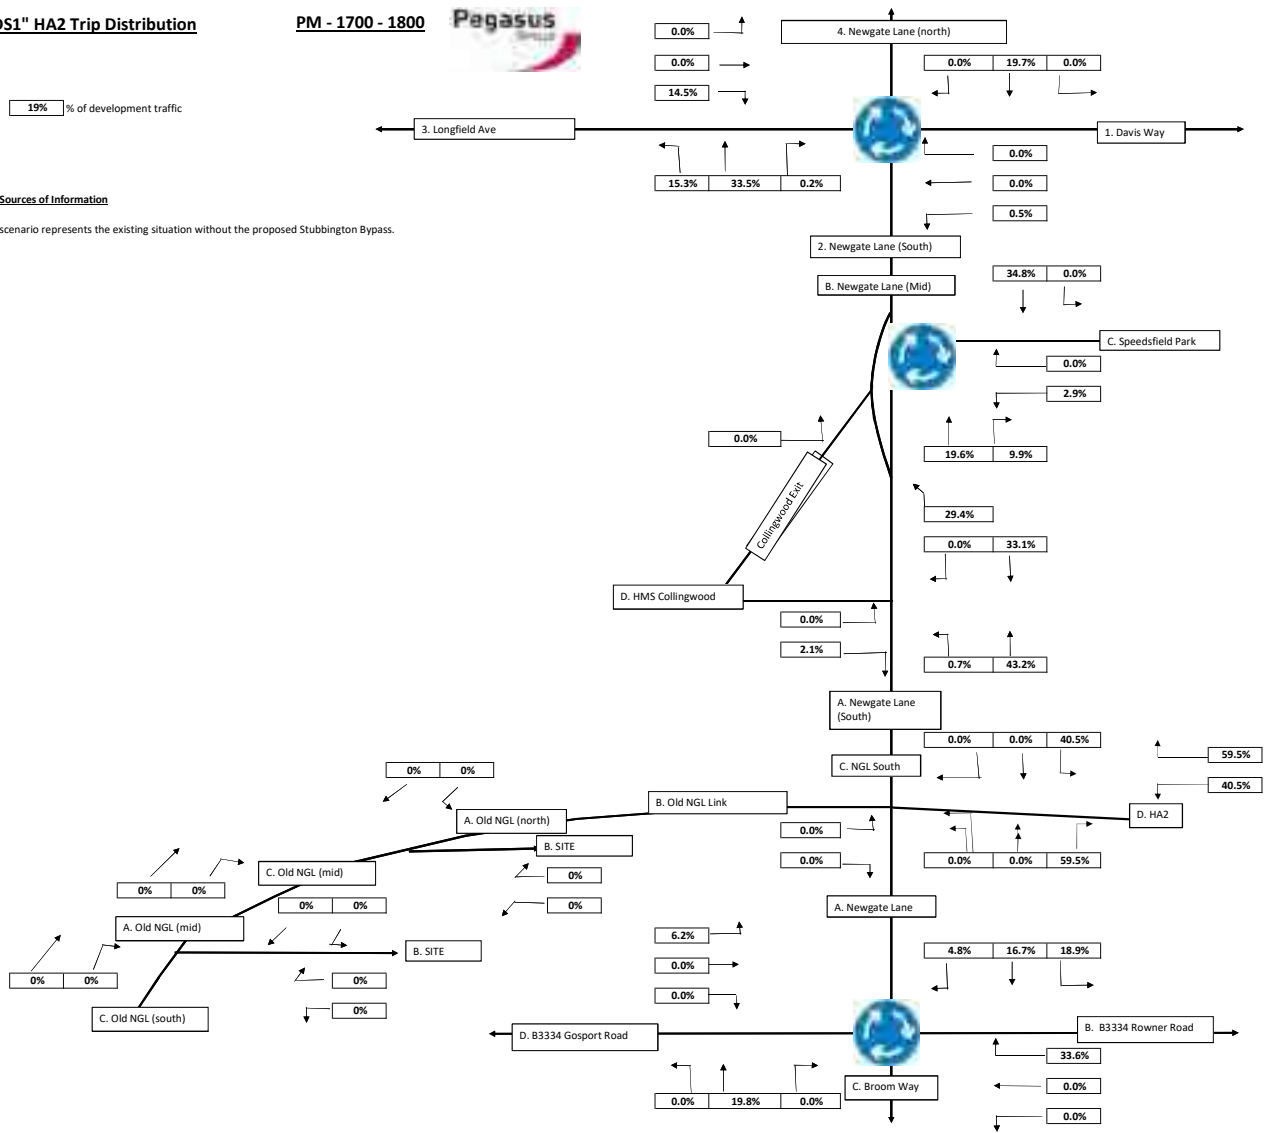

**"DS1" Development Trips**

AM - 0800 - 0900




Key:

10 Development Vehicle Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

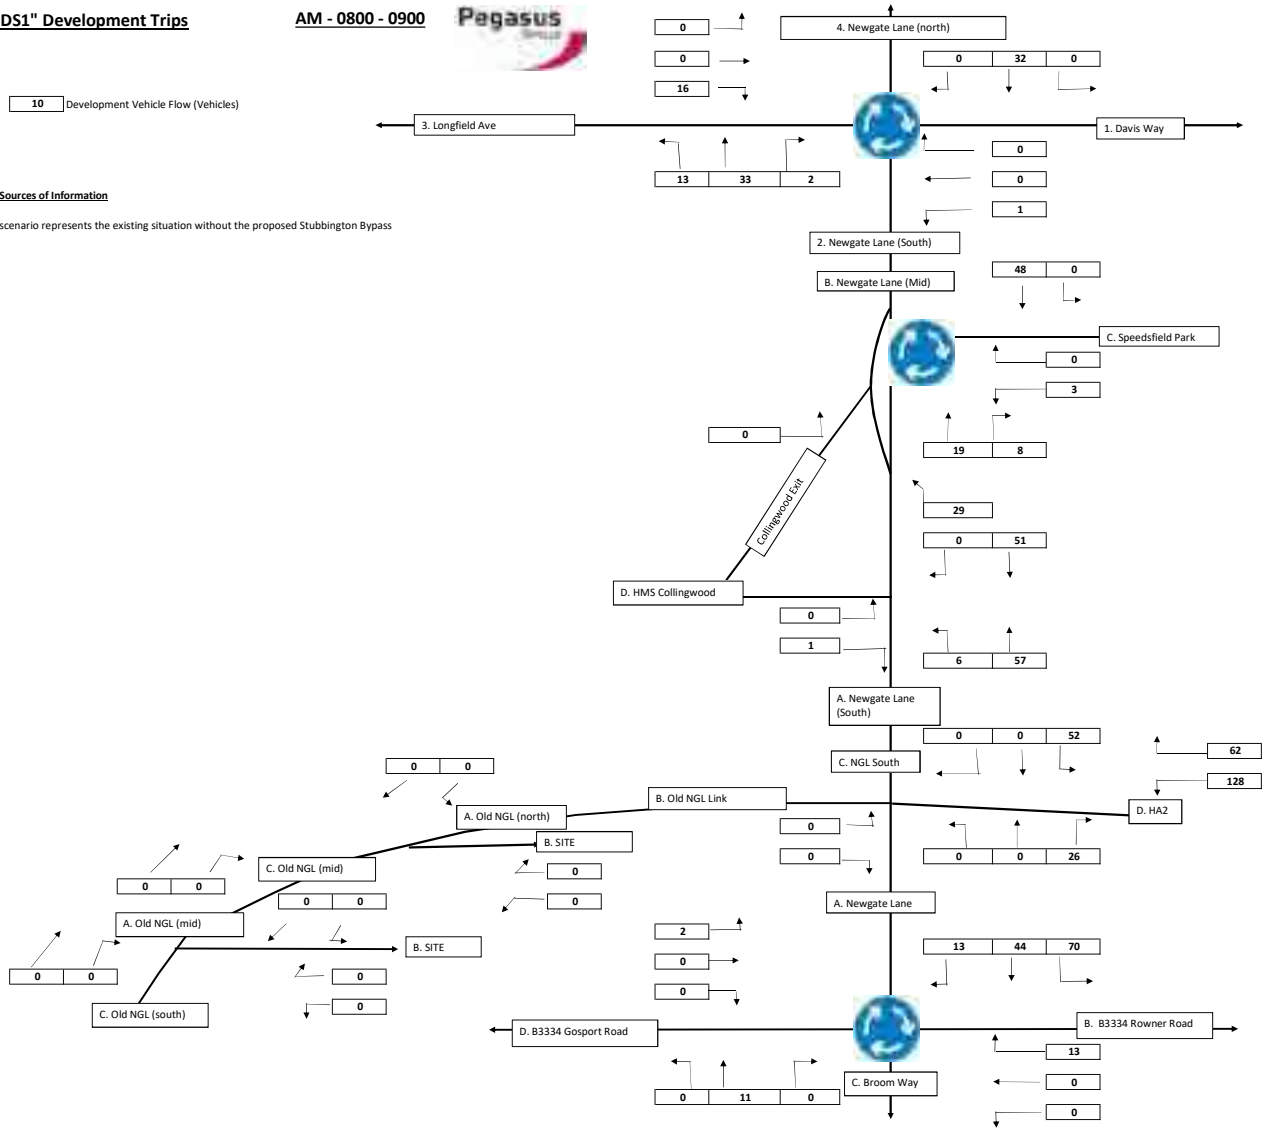

**"DS1" HA2 Trips**

**PM - 1700 - 1800**




Key:

10 Development Vehicle Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

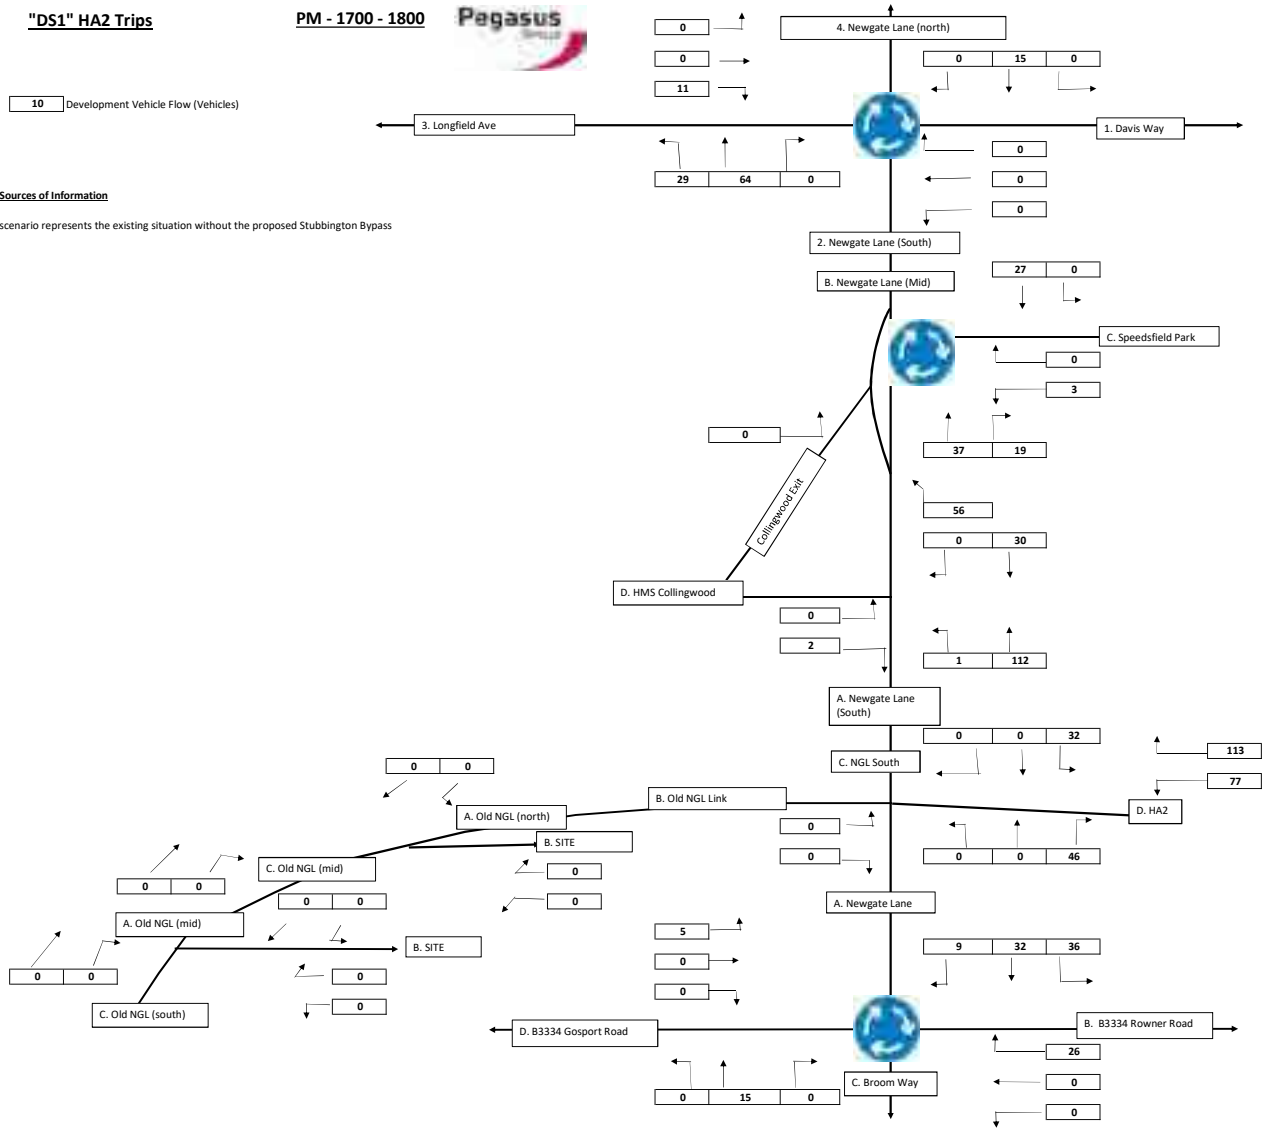

**2036 Base + Dev + HA2 "DS1"**

AM - 0800 - 0900




Growth Rate: 1.1082

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

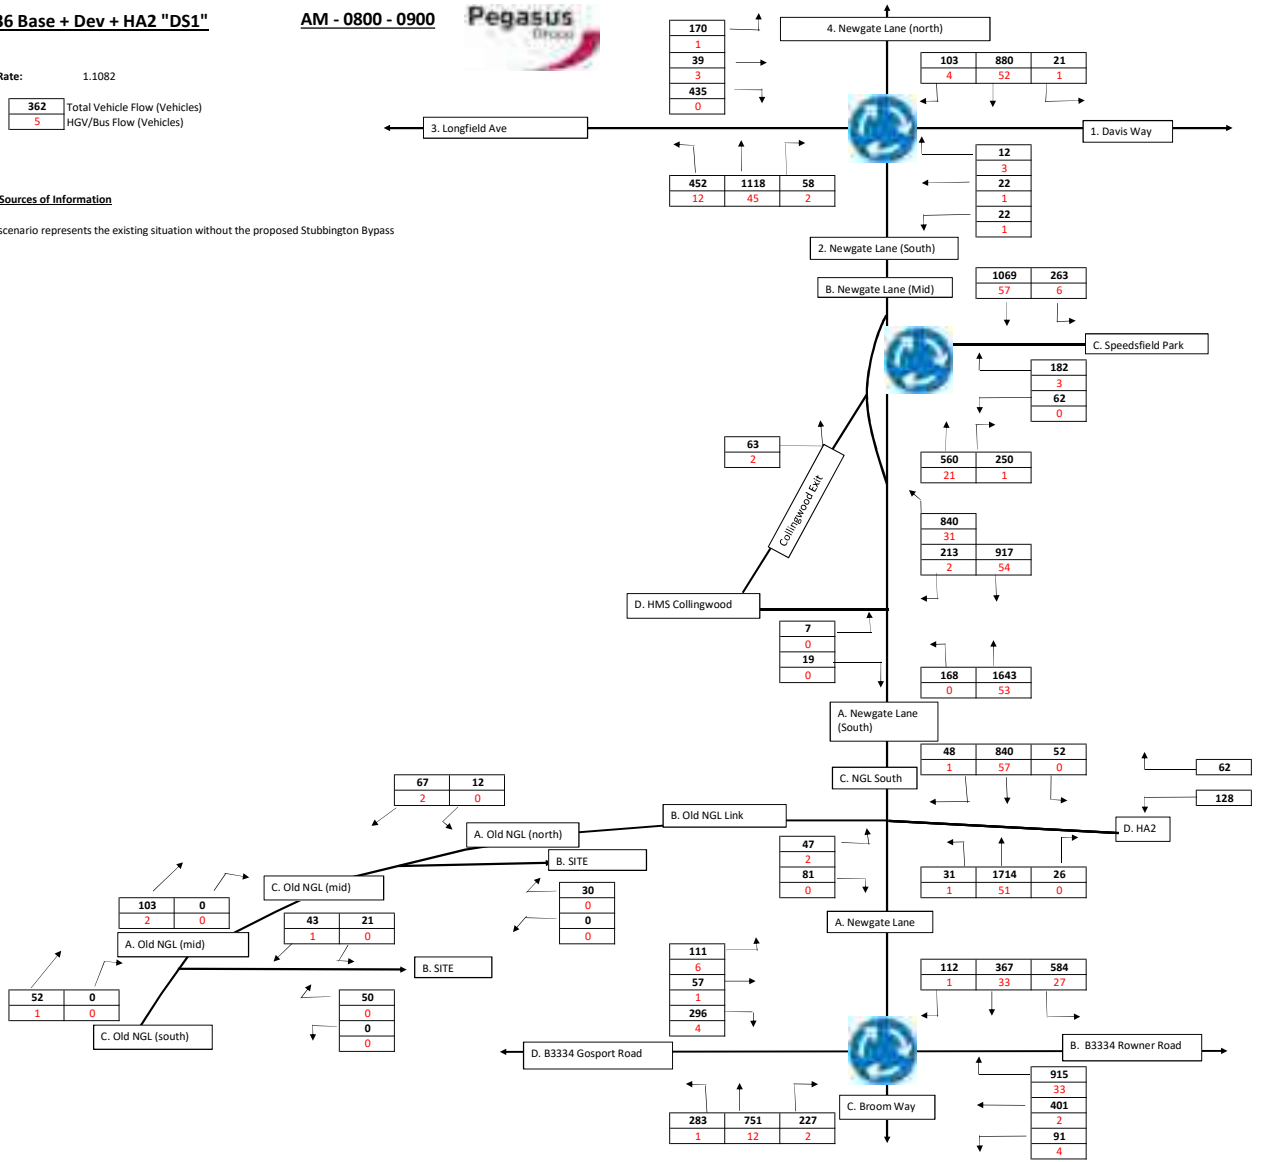



**2036 Base + Dev + HA2 "DS1"**

AM - 0800 - 0900




Growth Rate: 1.1057

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS1 scenario represents the existing situation without the proposed Stubbington Bypass

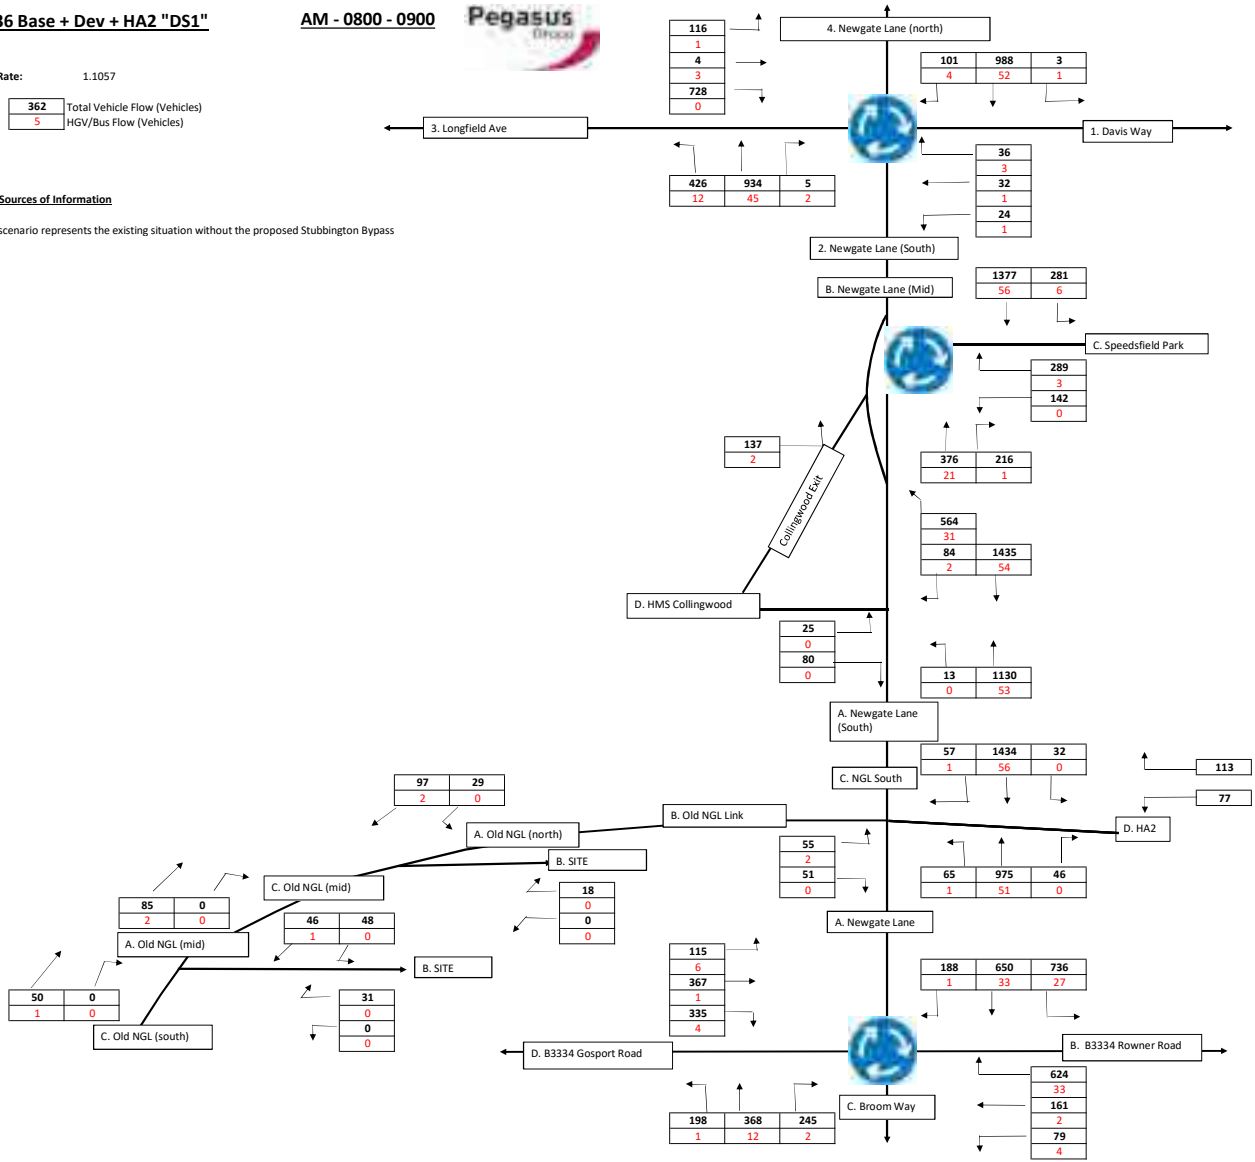

**"DS2" HA2 Trip Distribution**


AM - 0800 - 0900



Key: 19% % of development traffic

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

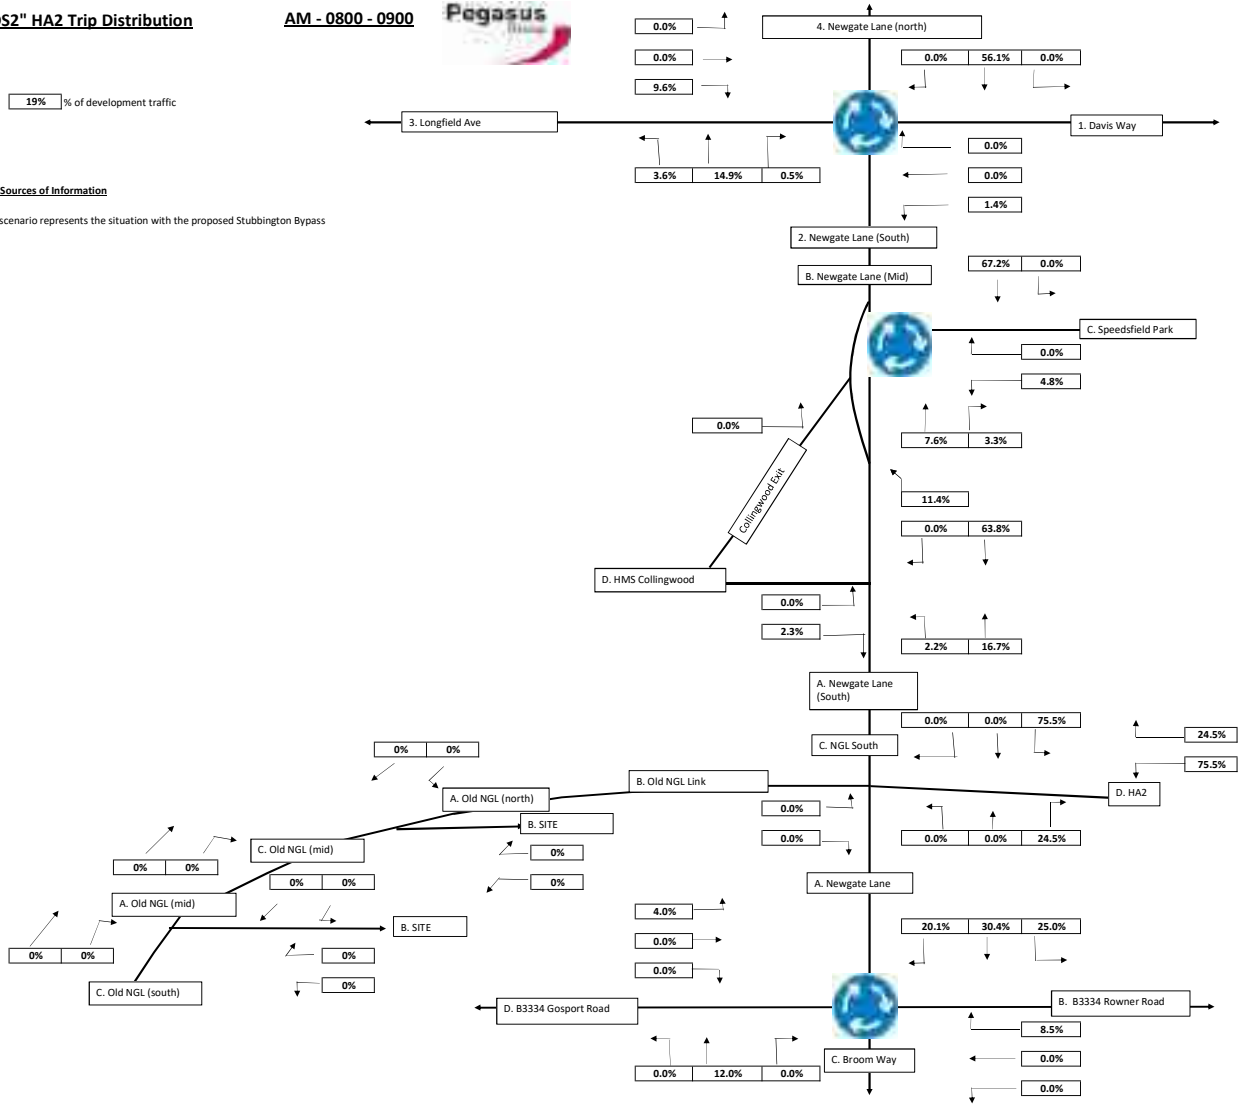

**"DS2" HA2 Trip Distribution**

PM - 1700 - 1800




Key:

19% % of development traffic

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

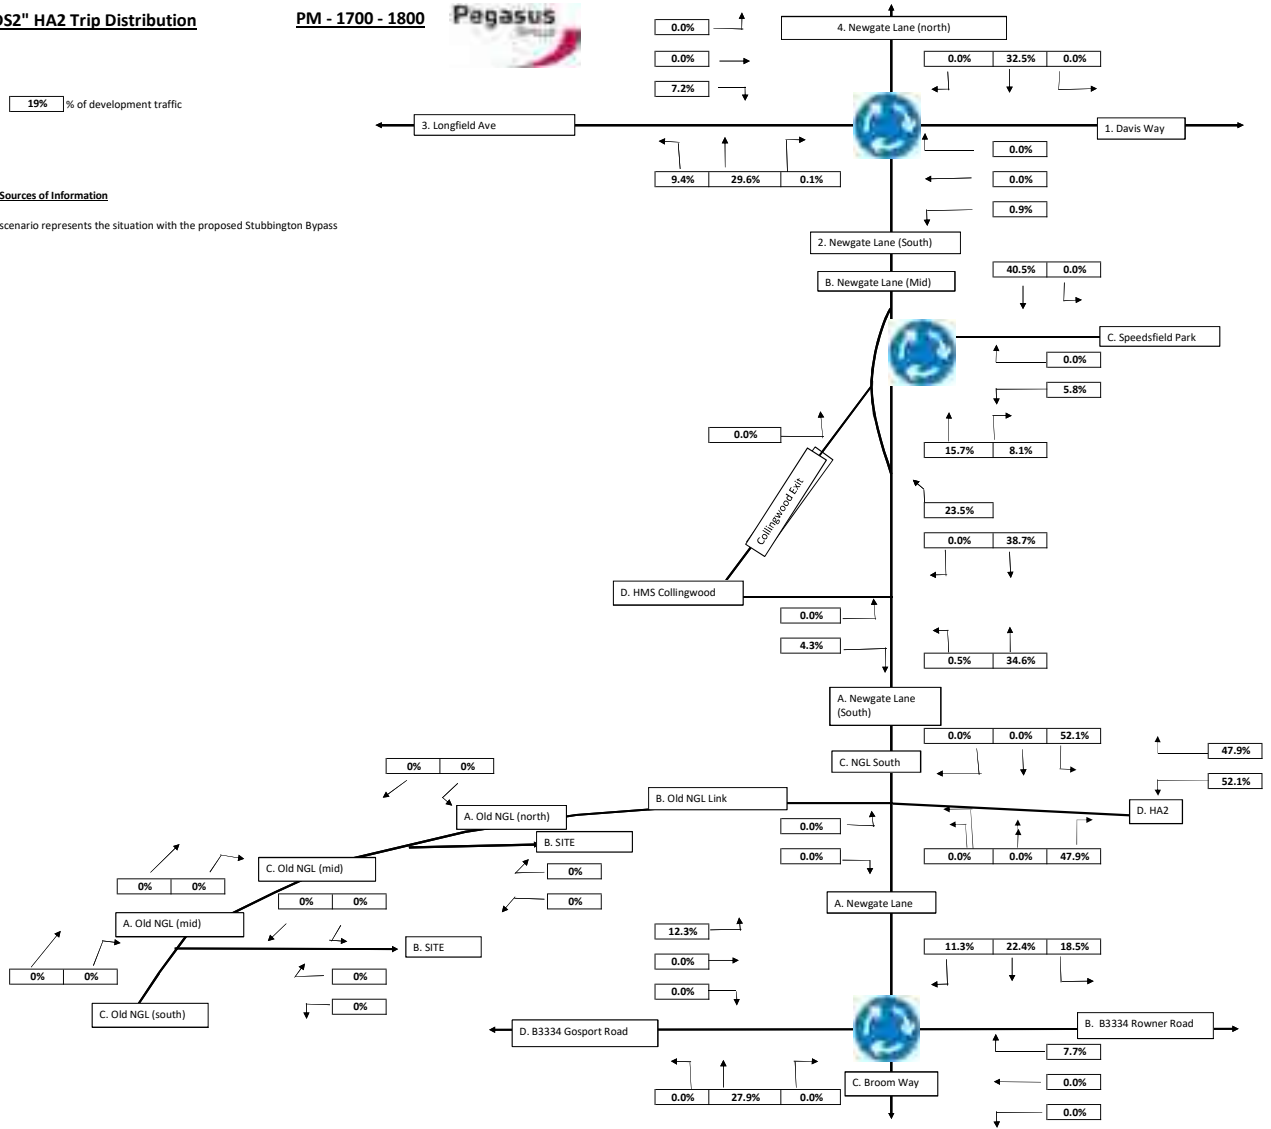

**"DS2" HA2 Trips**

AM - 0800 - 0900




Key:

10 Development Vehicle Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

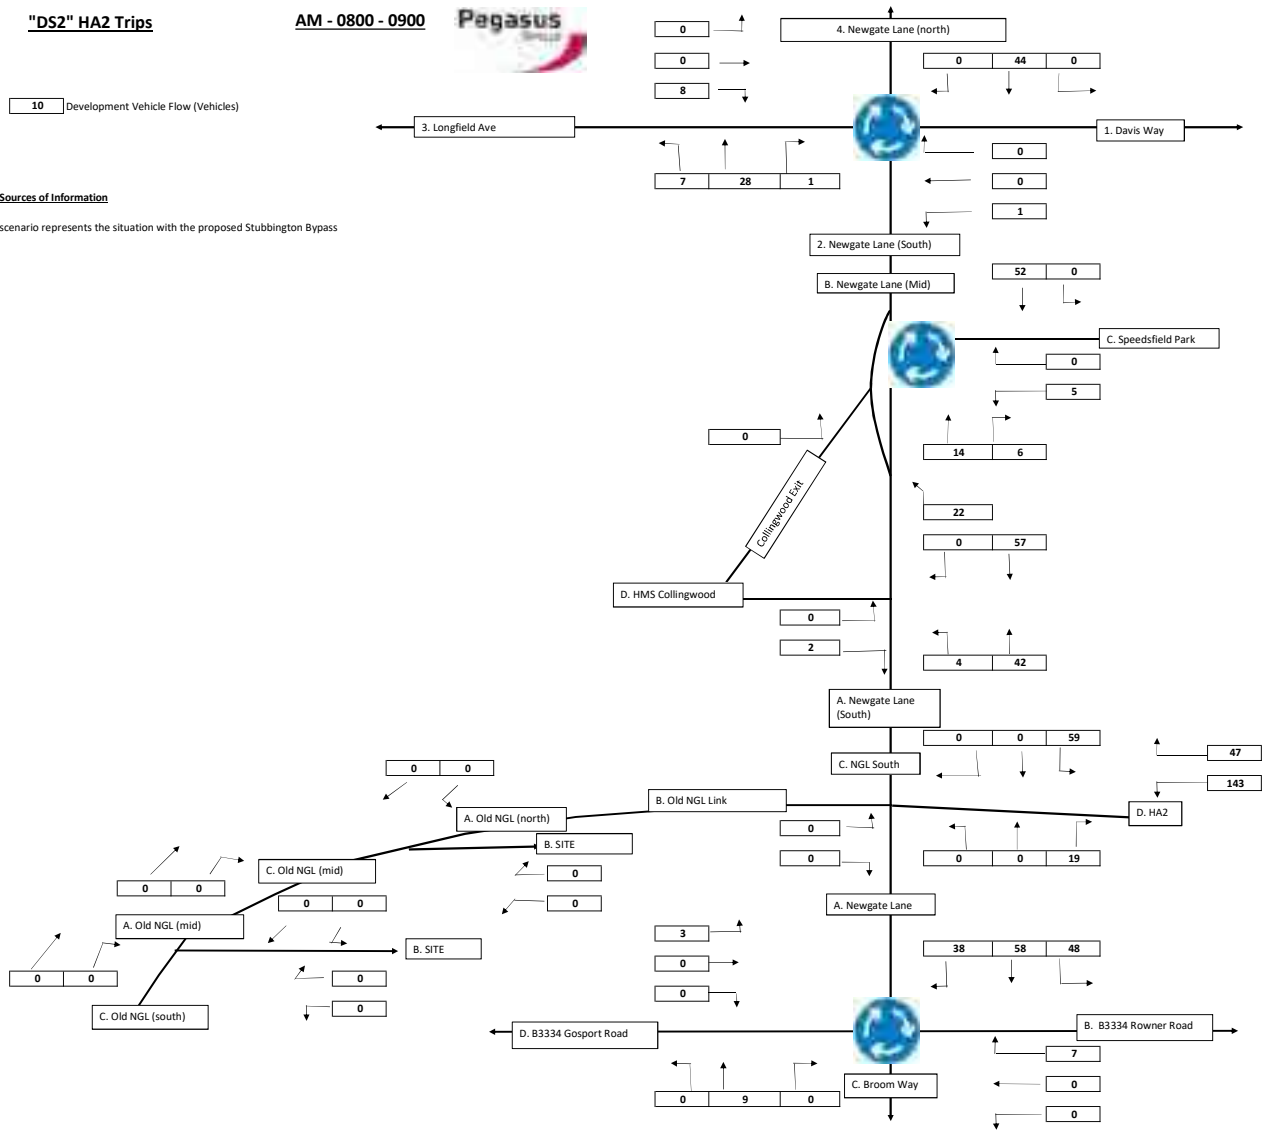

**"DS2" HA2 Trips**

**PM - 1700 - 1800**




Key:

10 Development Vehicle Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

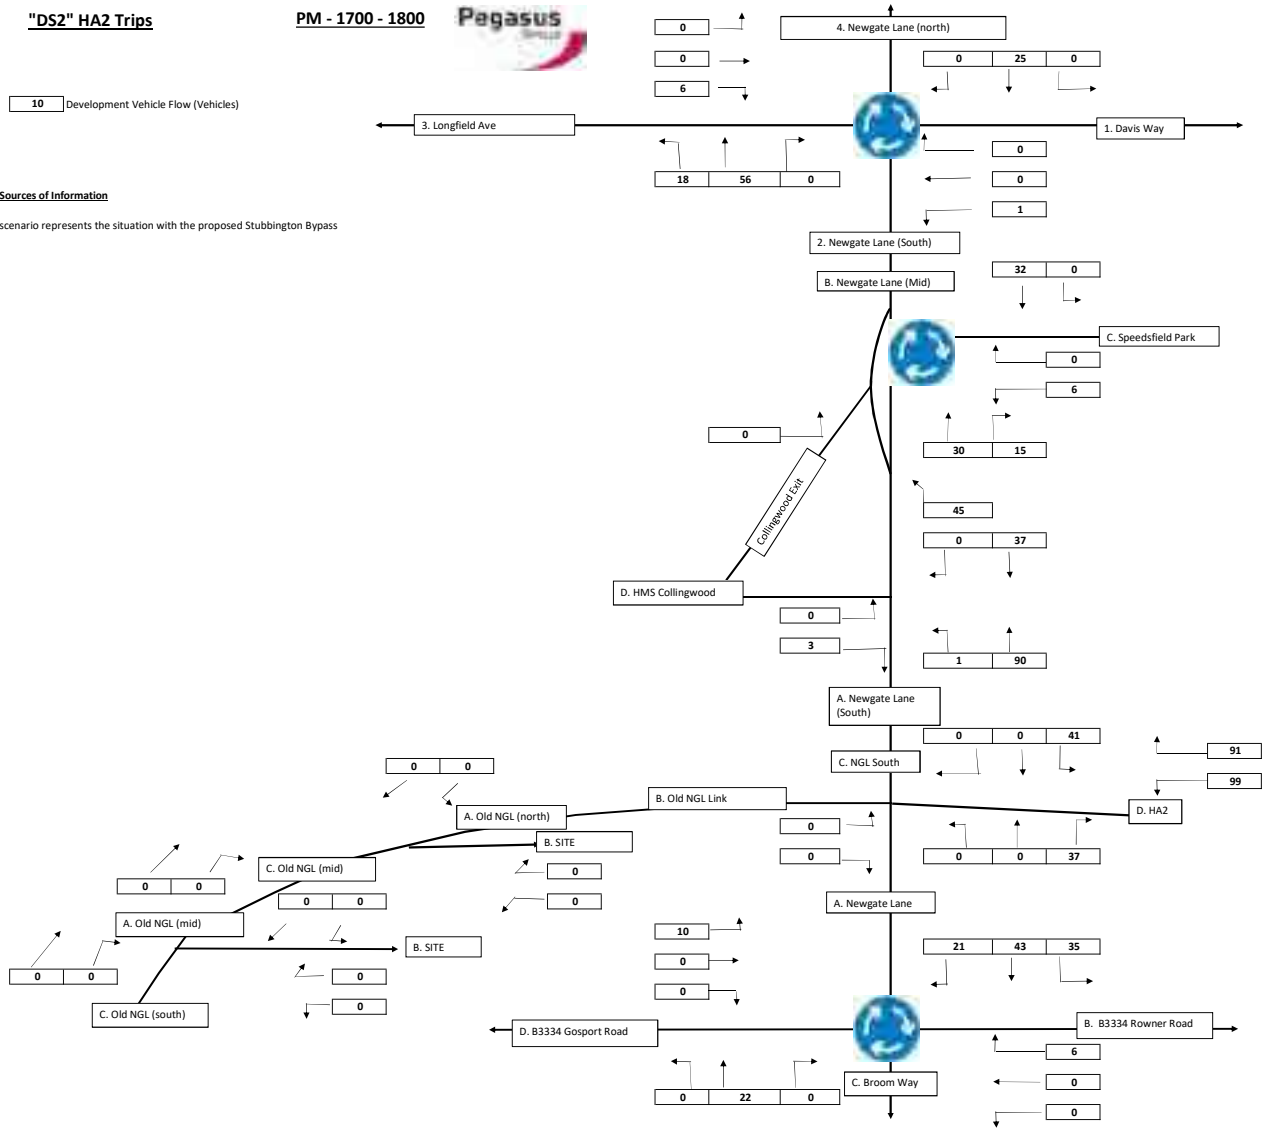

**2036 Base + Dev + HA2 "DS2"**

AM - 0800 - 0900




Growth Rate: 1.1082

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

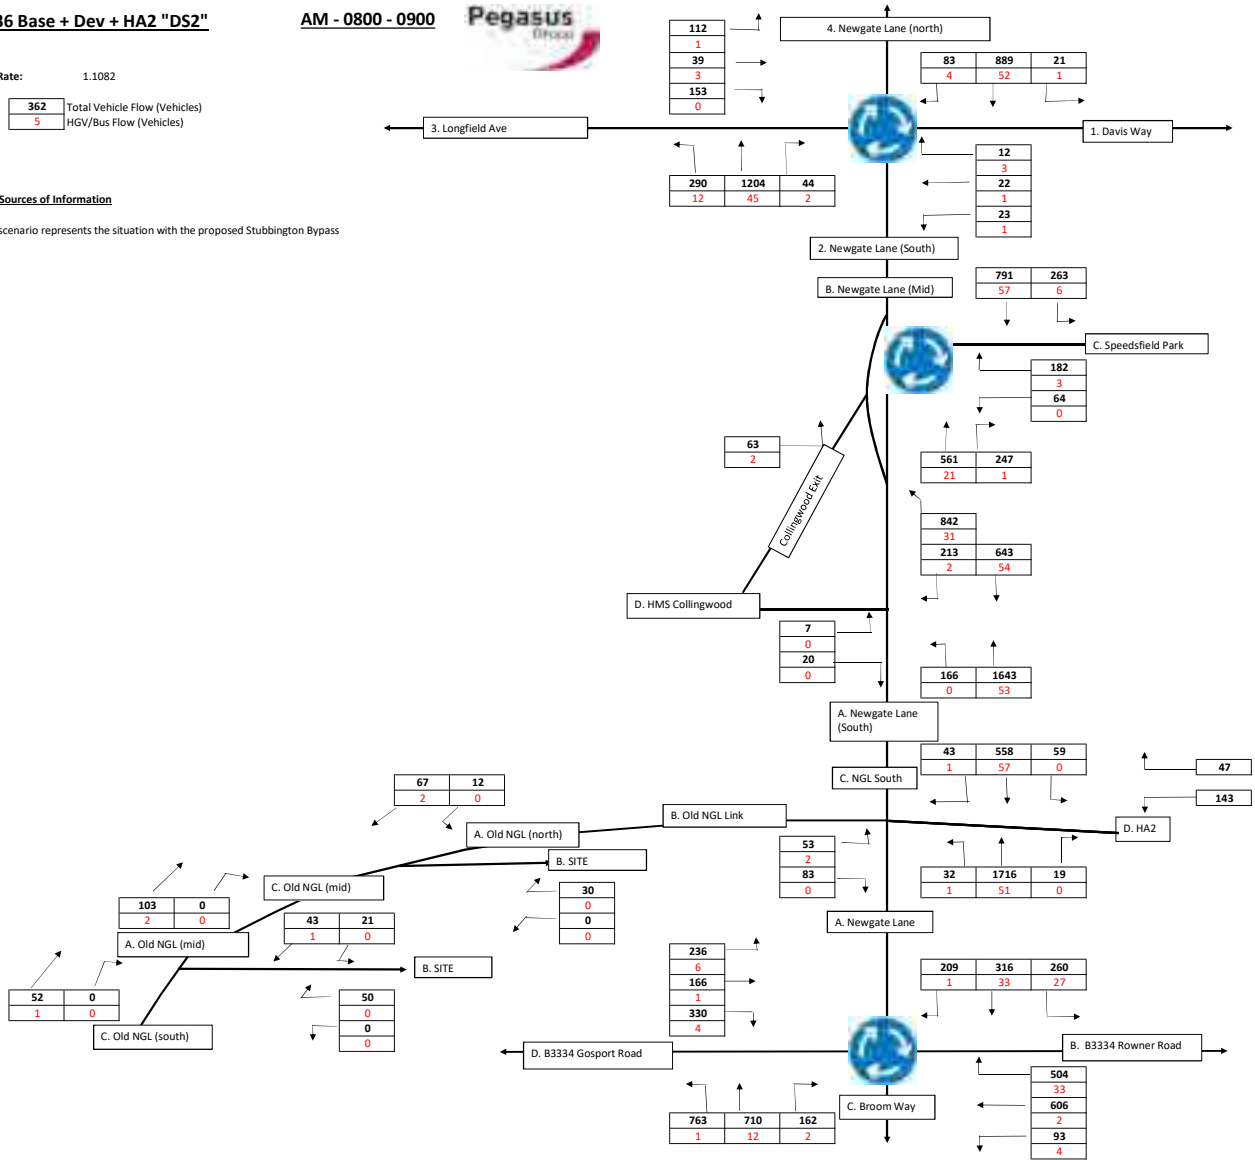

**2036 Base + Dev + HA2 "DS2"**

AM - 0800 - 0900




Growth Rate: 1.1057

Key: 

362	Total Vehicle Flow (Vehicles)
5	HGV/Bus Flow (Vehicles)

**Notes & Sources of Information**

The DS2 scenario represents the situation with the proposed Stubbington Bypass

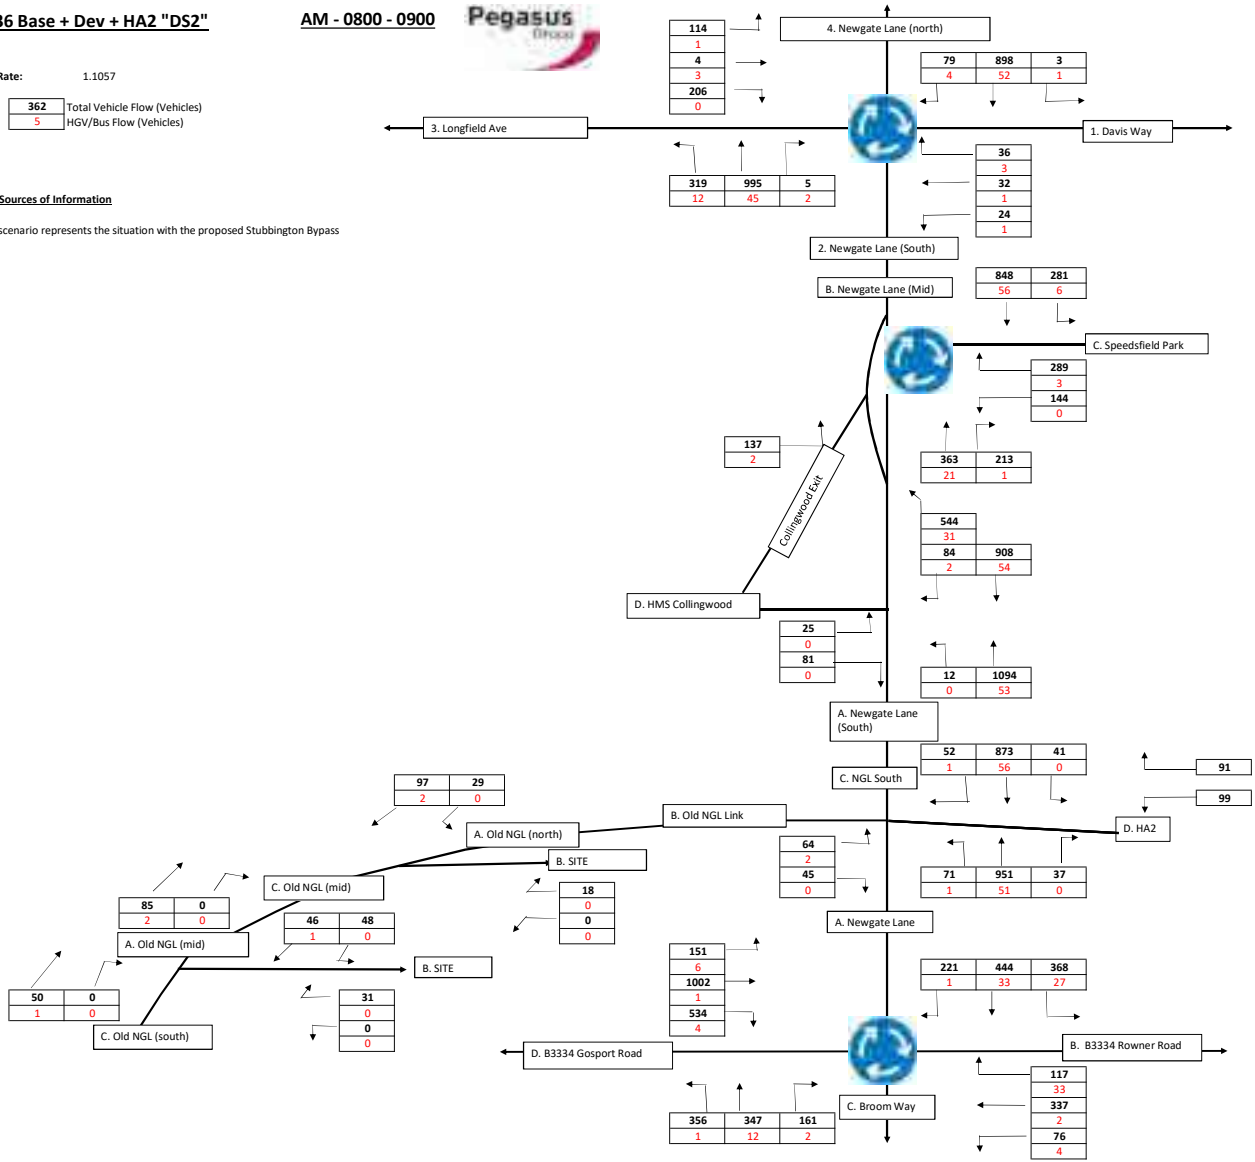

## **APPENDIX 13**

### **2036 MODELLING OUTPUTS**




Basic Results Summary  
**Basic Results Summary**

**User and Project Details**

<b>Project:</b>	
<b>Title:</b>	
<b>Location:</b>	
<b>Additional detail:</b>	
<b>File name:</b>	NGL Sig jctn2036.lsg3x
<b>Author:</b>	
<b>Company:</b>	
<b>Address:</b>	

**Scenario 1: '2036 Base + Dev AM DS1' (FG1: '2036 Base + Dev AM DS1', Plan 1: 'Network Control Plan 1')**  
**Network Layout Diagram**

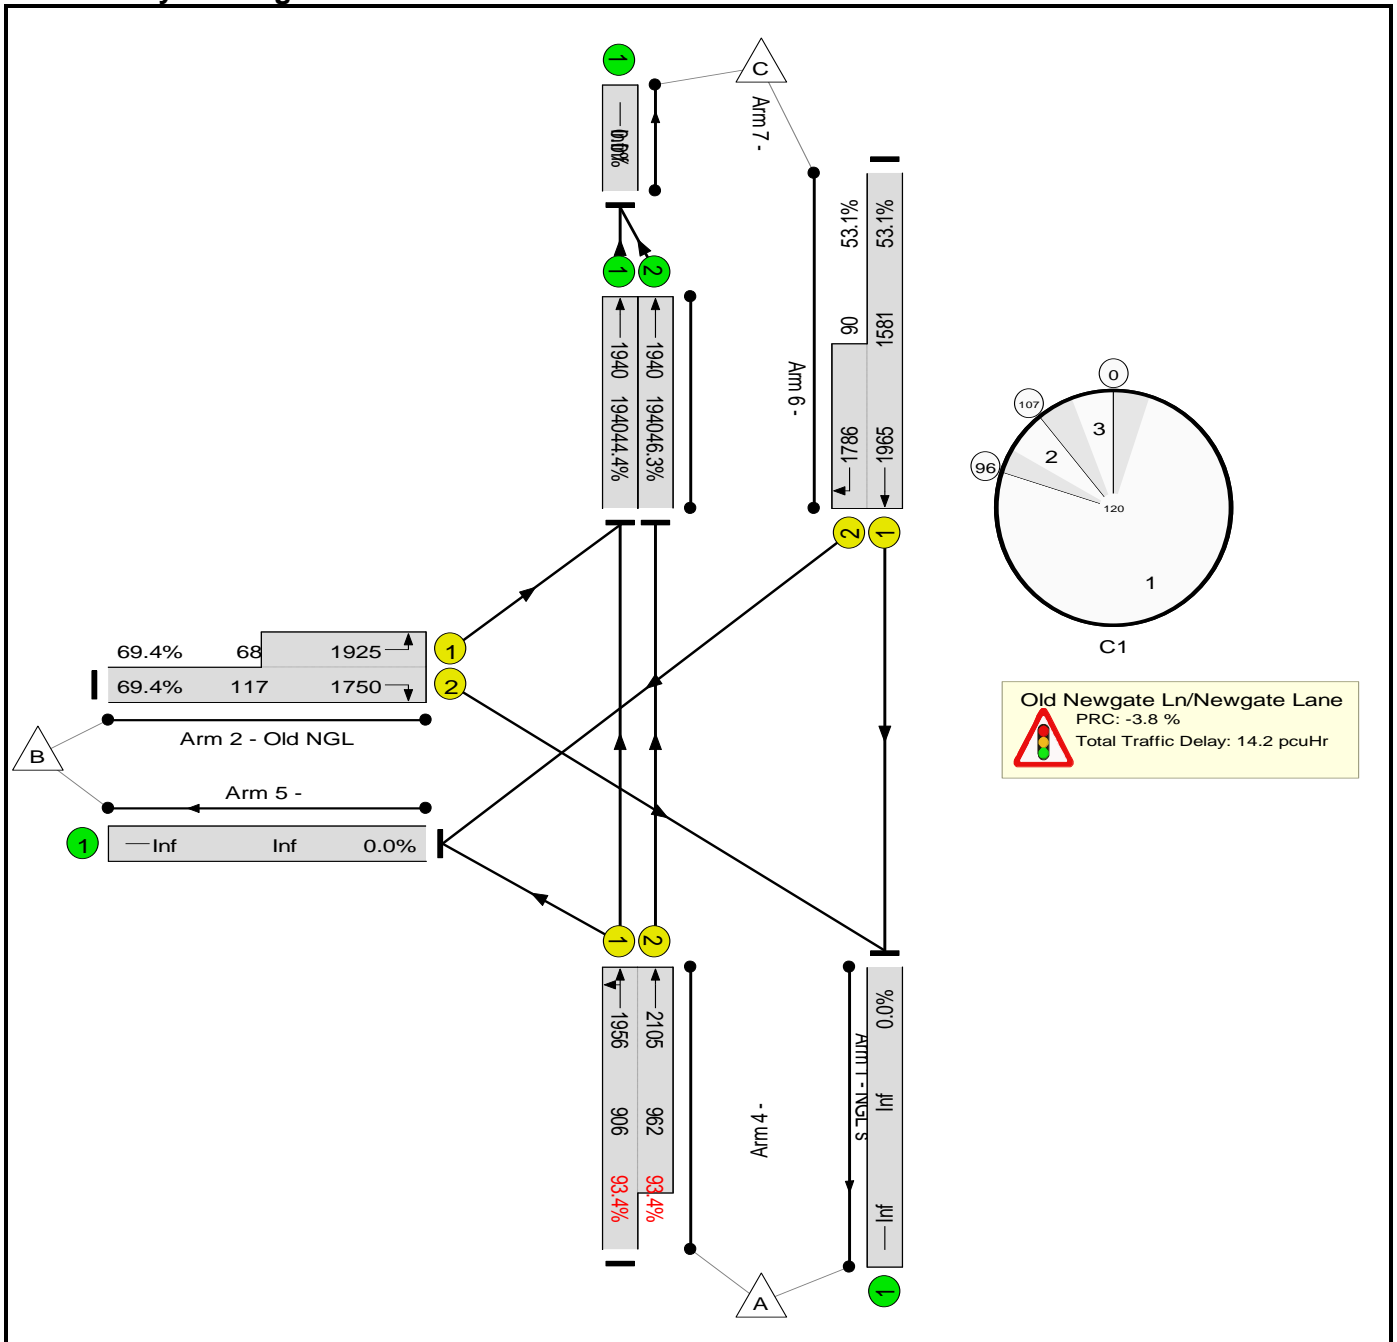

## Basic Results Summary

Basic Results Summary


**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
Network	-	-	-		-	-	-	-	-	-	93.4%	0	0	0	14.2	-	-	-
Old Newgate Ln/Newgate Lane	-	-	-		-	-	-	-	-	-	93.4%	0	0	0	14.2	-	-	-
1/1+1/2	NGL s Left Ahead	U	A		1	92	-	1745	1956:2105	906+962	93.4 : 93.4%	-	-	-	9.2	18.9	30.5	6.2
2/2+2/1	Old NGL Right Left	U	C		1	7	-	128	1750:1925	117+68	69.4 : 69.4%	-	-	-	3.0	85.1	3.7	2.5
3/1+3/2	NGL N Ahead Right	U	B		1	101	-	888	1965:1786	1581+90	53.1 : 53.1%	-	-	-	1.1	4.6	8.1	3.7
6/1	Ahead	U	-		-	-	-	862	1940	1940	44.4%	-	-	-	0.4	1.7	0.4	-
6/2	Ahead	U	-		-	-	-	899	1940	1940	46.3%	-	-	-	0.4	1.7	4.8	-
				C1	PRC for Signalled Lanes (%):		-3.8	Total Delay for Signalled Lanes (pcuHr):				13.34	Cycle Time (s): 120					
					PRC Over All Lanes (%):		-3.8	Total Delay Over All Lanes(pcuHr):				14.17						

Basic Results Summary

Scenario 2: '2036 Base + Dev PM DS1' (FG2: '2036 Base + Dev PM DS1', Plan 1: 'Network Control Plan 1')

Network Layout Diagram

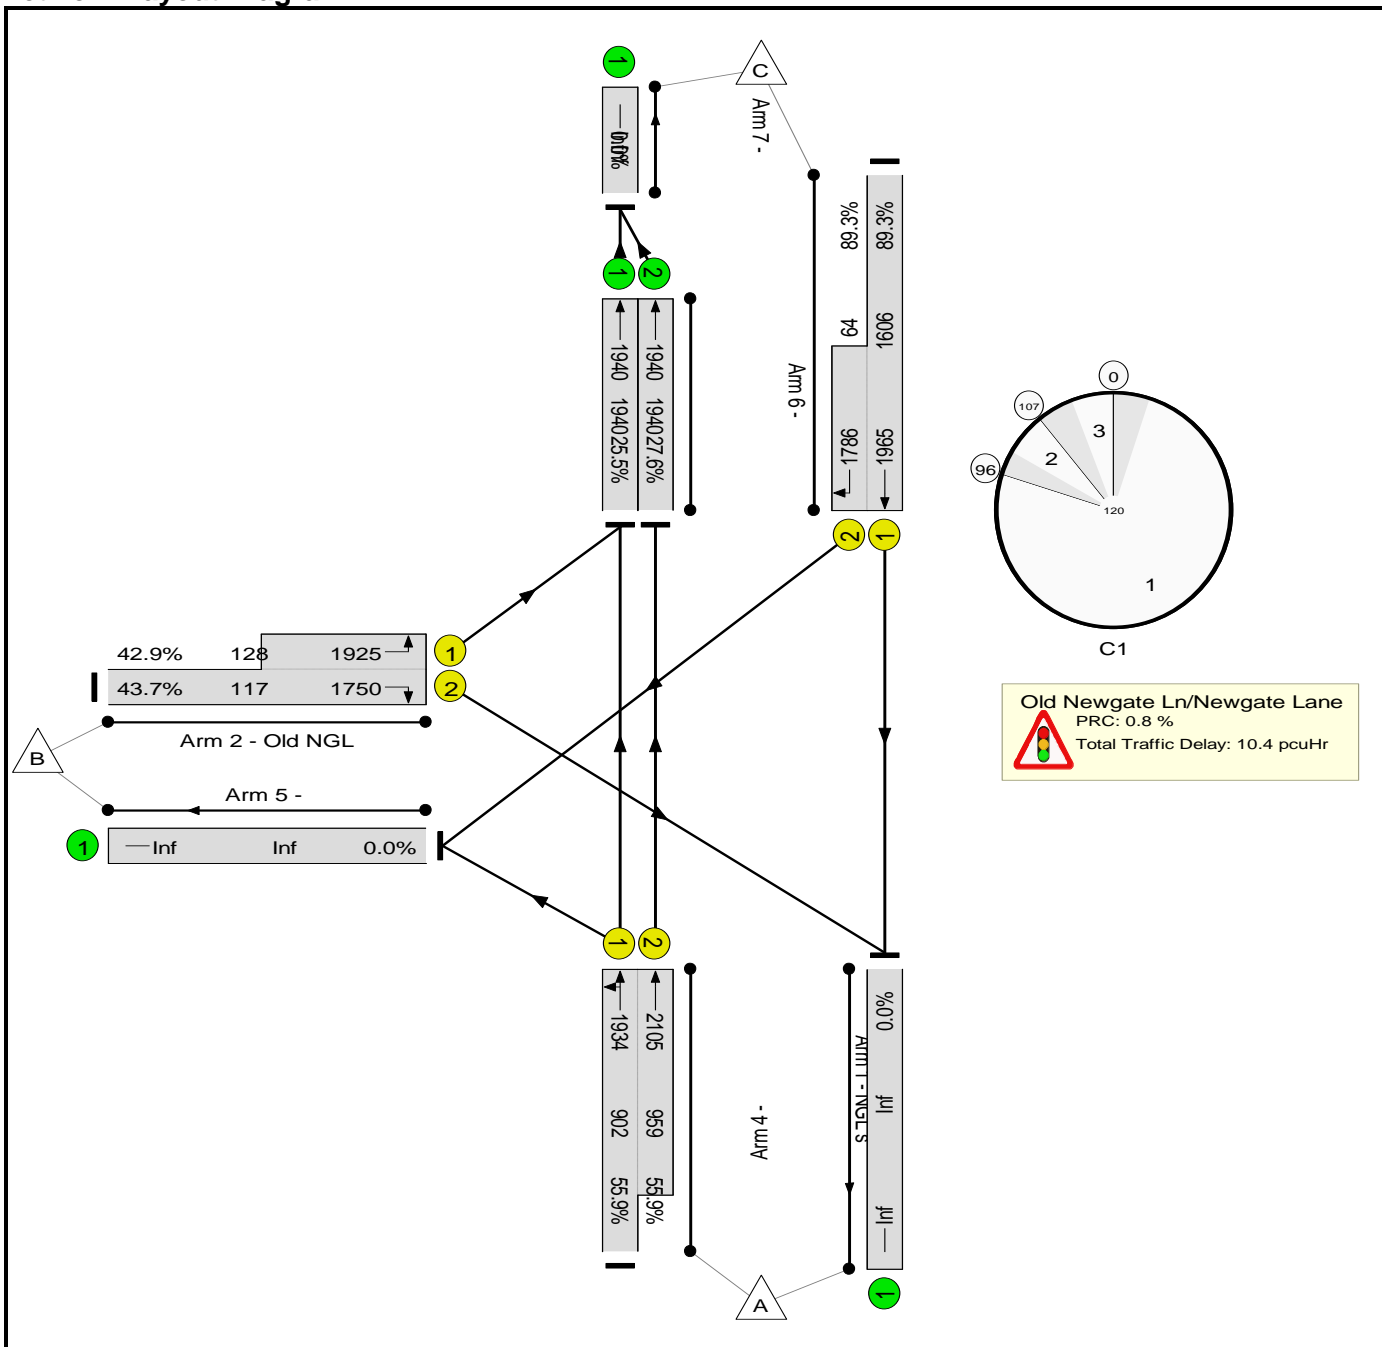

Basic Results Summary


**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)	
Network	-	-	-		-	-	-	-	-	-	89.3%	0	0	0	10.4	-	-	-	
Old Newgate Ln/Newgate Lane	-	-	-		-	-	-	-	-	-	89.3%	0	0	0	10.4	-	-	-	
1/1+1/2	NGL s Left Ahead	U	A		1	92	-	1040	1934:2105	902+959	55.9 : 55.9%	-	-	-	1.8	6.3	6.0	3.7	
2/2+2/1	Old NGL Right Left	U	C		1	7	-	106	1750:1925	117+128	43.7 : 42.9%	-	-	-	2.0	66.7	2.1	1.7	
3/1+3/2	NGL N Ahead Right	U	B		1	101	-	1491	1965:1786	1606+64	89.3 : 89.3%	-	-	-	6.2	15.0	33.9	6.4	
6/1	Ahead	U	-		-	-	-	494	1940	1940	25.5%	-	-	-	0.2	1.2	0.2	-	
6/2	Ahead	U	-		-	-	-	536	1940	1940	27.6%	-	-	-	0.2	1.3	0.2	-	
				C1	PRC for Signalled Lanes (%):			0.8	Total Delay for Signalled Lanes (pcuHr):			10.00	Cycle Time (s): 120						
					PRC Over All Lanes (%):			0.8	Total Delay Over All Lanes(pcuHr):			10.37							

Basic Results Summary

Scenario 3: '2036 Base + Dev AM DS2' (FG3: '2036 Base + Dev AM DS2', Plan 1: 'Network Control Plan 1')

Network Layout Diagram

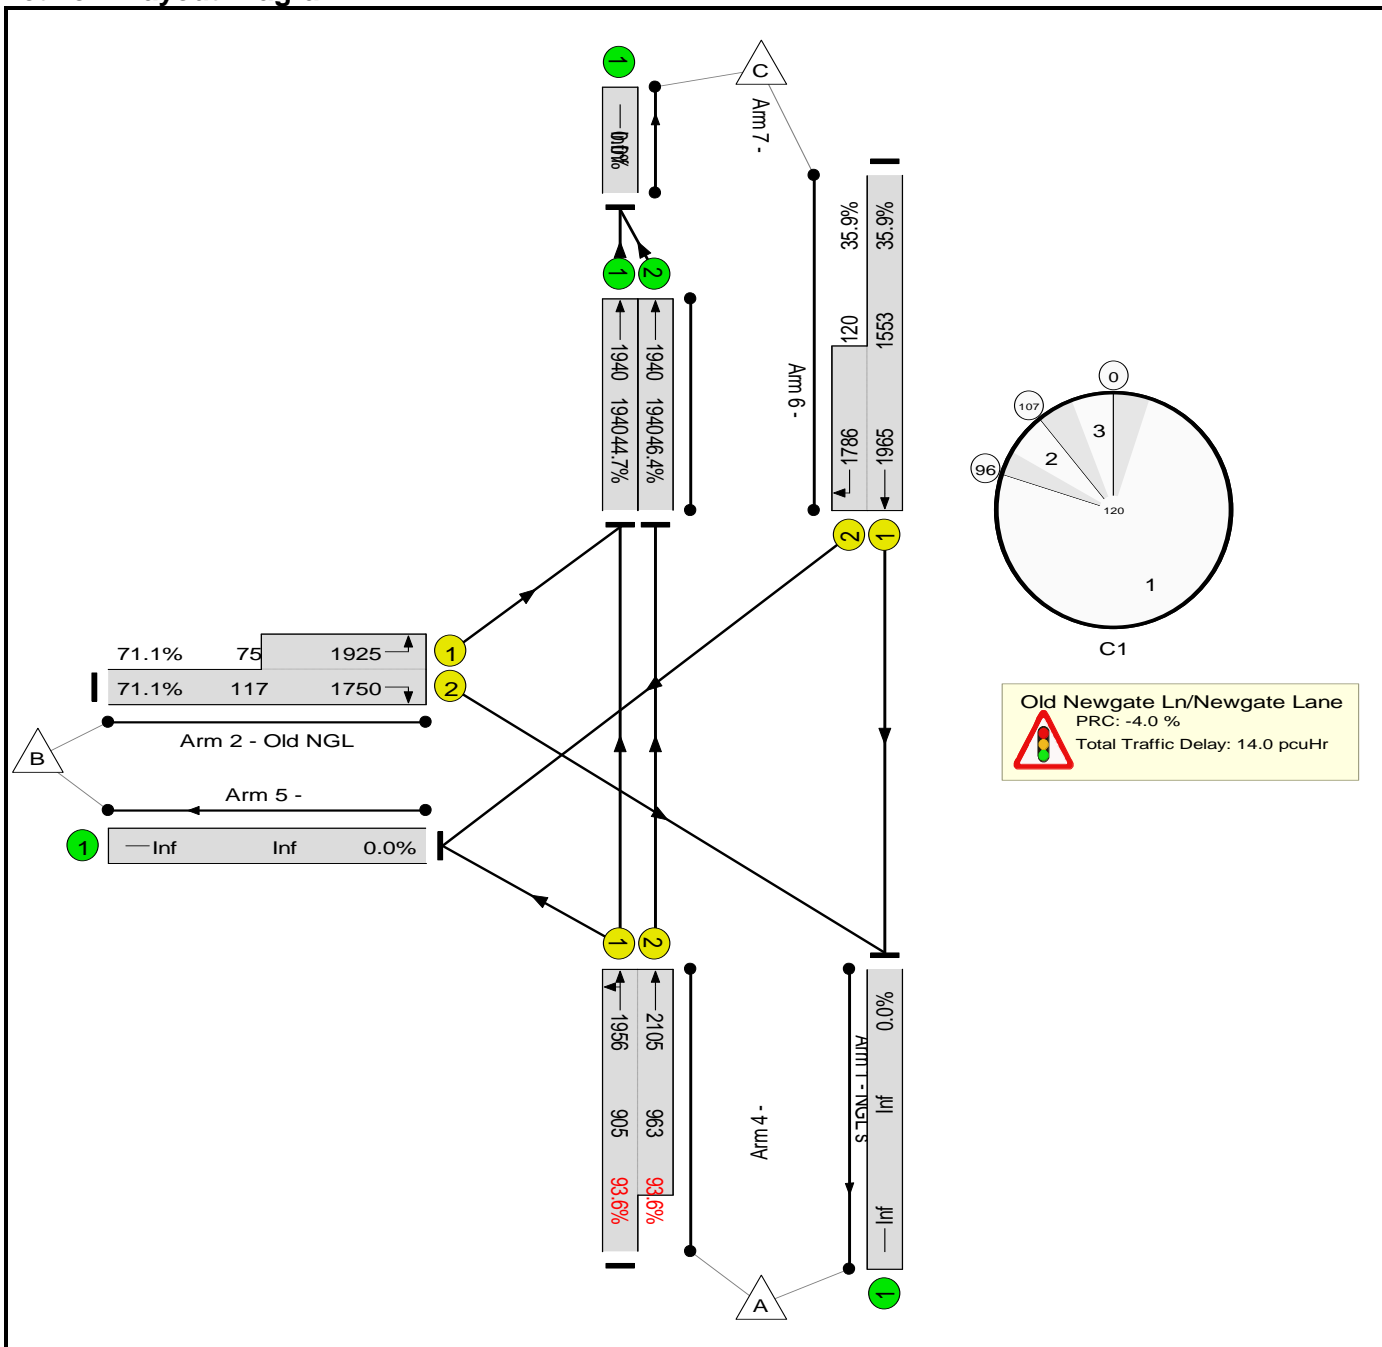

Basic Results Summary


**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)	
Network	-	-	-		-	-	-	-	-	-	93.6%	0	0	0	14.0	-	-	-	
Old Newgate Ln/Newgate Lane	-	-	-		-	-	-	-	-	-	93.6%	0	0	0	14.0	-	-	-	
1/1+1/2	NGL s Left Ahead	U	A		1	92	-	1748	1956:2105	905+963	93.6 : 93.6%	-	-	-	9.3	19.3	31.1	6.3	
2/2+2/1	Old NGL Right Left	U	C		1	7	-	136	1750:1925	117+75	71.1 : 71.1%	-	-	-	3.2	85.7	3.9	2.5	
3/1+3/2	NGL N Ahead Right	U	B		1	101	-	601	1965:1786	1553+120	35.9 : 35.9%	-	-	-	0.6	3.5	4.2	2.5	
6/1	Ahead	U	-		-	-	-	868	1940	1940	44.7%	-	-	-	0.4	1.7	0.4	-	
6/2	Ahead	U	-		-	-	-	901	1940	1940	46.4%	-	-	-	0.4	1.7	4.8	-	
C1					PRC for Signalled Lanes (%):		-4.0		Total Delay for Signalled Lanes (pcuHr):			13.18		Cycle Time (s): 120					
					PRC Over All Lanes (%):		-4.0		Total Delay Over All Lanes(pcuHr):			14.02							

Basic Results Summary

Scenario 4: '2036 Base + Dev PM DS2' (FG4: '2036 Base + Dev PM DS2', Plan 1: 'Network Control Plan 1')

Network Layout Diagram

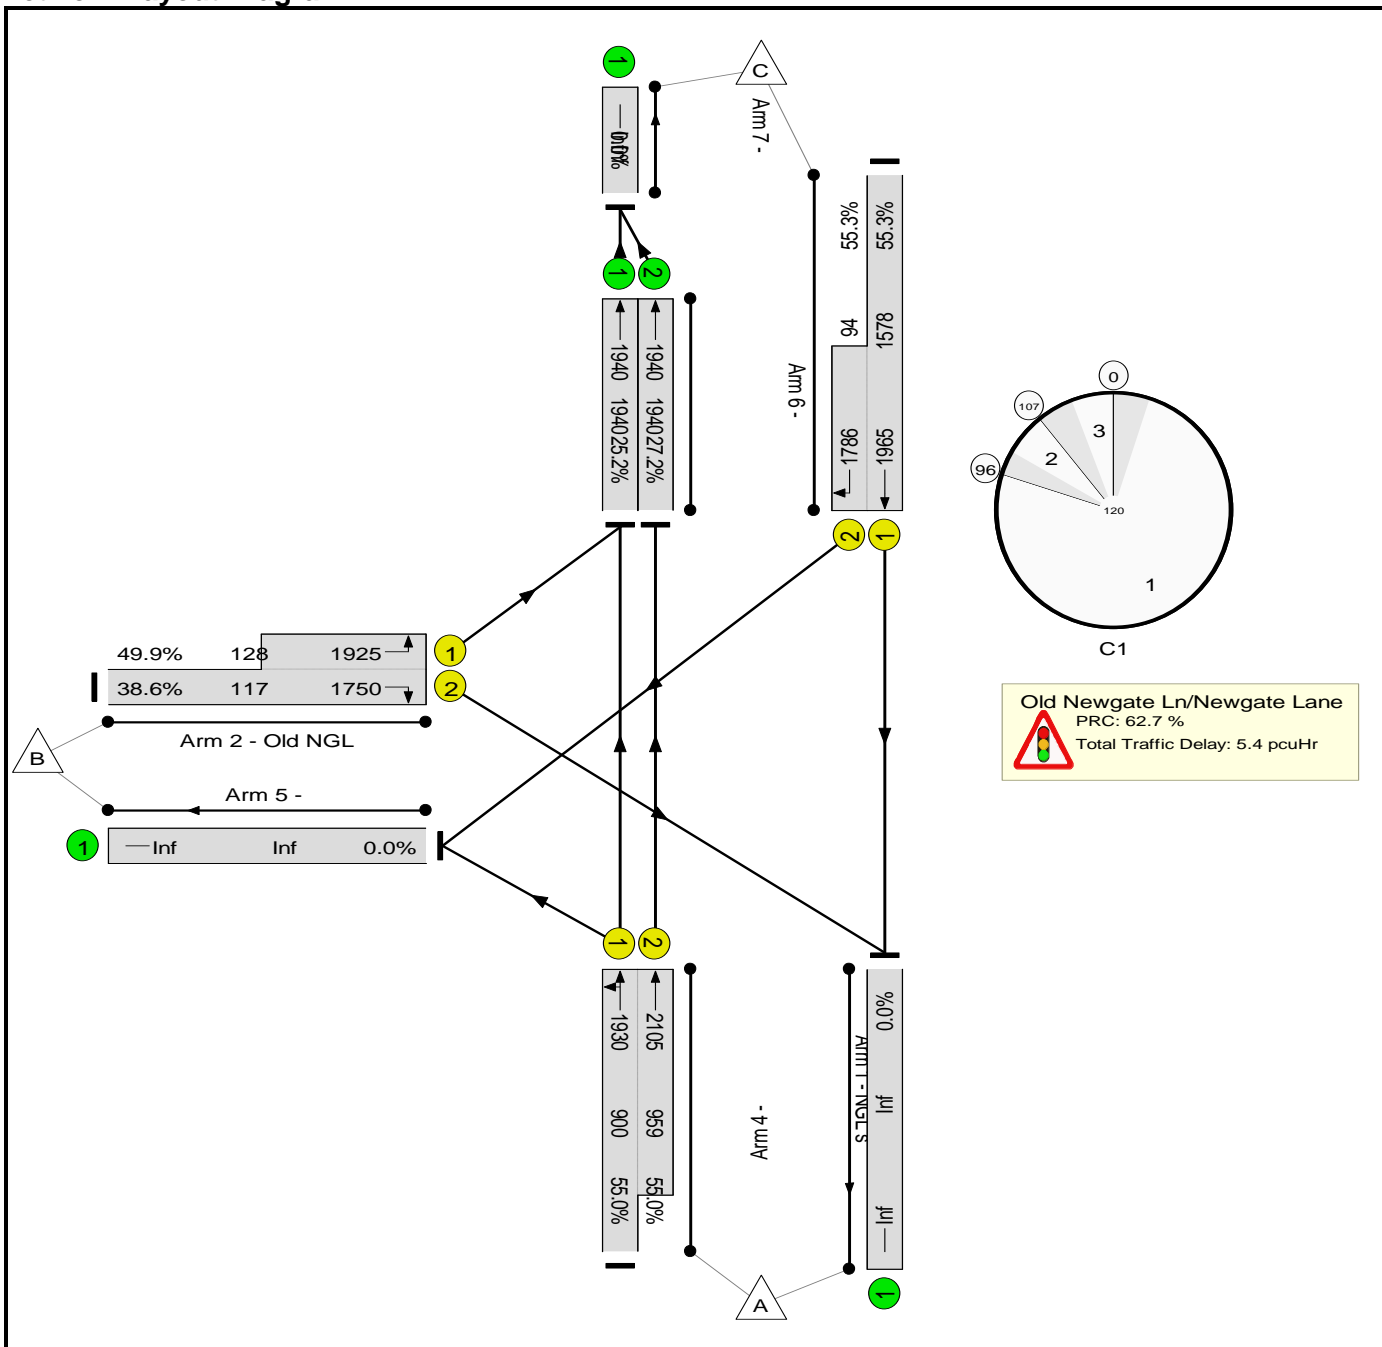



Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
Network	-	-	-		-	-	-	-	-	-	55.3%	0	0	0	5.4	-	-	-
Old Newgate Ln/Newgate Lane	-	-	-		-	-	-	-	-	-	55.3%	0	0	0	5.4	-	-	-
1/1+1/2	NGL s Left Ahead	U	A		1	92	-	1022	1930:2105	900+959	55.0 : 55.0%	-	-	-	1.8	6.2	5.9	3.7
2/2+2/1	Old NGL Right Left	U	C		1	7	-	109	1750:1925	117+128	38.6 : 49.9%	-	-	-	2.0	67.1	2.4	2.0
3/1+3/2	NGL N Ahead Right	U	B		1	101	-	925	1965:1786	1578+94	55.3 : 55.3%	-	-	-	1.2	4.8	8.6	3.9
6/1	Ahead	U	-		-	-	-	488	1940	1940	25.2%	-	-	-	0.2	1.2	0.2	-
6/2	Ahead	U	-		-	-	-	527	1940	1940	27.2%	-	-	-	0.2	1.3	0.2	-
				C1	PRC for Signalled Lanes (%): 62.7			62.7	Total Delay for Signalled Lanes (pcuHr): 5.03				Cycle Time (s): 120					
					PRC Over All Lanes (%): 62.7				Total Delay Over All Lanes(pcuHr): 5.38									

Junctions 9
PICADY 9 - Priority Intersection Module
Version: 9.5.0.6896 © Copyright TRL Limited, 2018
For sales and distribution information, program advice and maintenance, contact TRL: +44 (0)1344 379777 software@trl.co.uk www.trlsoftware.co.uk
The users of this computer program for the solution of an engineering problem are in no way relieved of their responsibility for the correctness of the solution

**Filename:** Old Newgate Ln NGLS all left 2036.j9

**Path:** \\Pg-brs-dc01\data\Bristol Projects\Bristol - Live Projects\BRS.4901 - BRS.5000\BRS.4989 - SUSTAINABLE LAND PLC - LAND TO THE NORTH OF GOSPORT ROAD, FAREHAM\Transport\7. Junction Modelling\b. PICADY\19

**Report generation date:** 27/02/2019 12:01:35

- »2036 DS1 Base, AM
- »2036 DS1 Base, PM
- »2036 DS1 Base + Dev, AM
- »2036 DS1 Base + Dev, PM
- »2036 DS2 Base, AM
- »2036 DS2 Base, PM
- »2036 DS2 Base + Dev, AM
- »2036 DS2 Base + Dev, PM

**Summary of junction performance**

	AM				PM			
	Queue (PCU)	Delay (s)	RFC	LOS	Queue (PCU)	Delay (s)	RFC	LOS
<b>2036 DS1 Base</b>								
Stream B-C	0.2	16.20	0.18	C	0.1	7.87	0.11	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.1	12.80	0.08	B	0.0	6.44	0.04	A
<b>2036 DS1 Base + Dev</b>								
Stream B-C	0.9	24.24	0.46	C	0.3	8.94	0.21	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.2	13.77	0.15	B	0.1	7.03	0.10	A
<b>2036 DS2 Base</b>								
Stream B-C	0.3	17.27	0.23	C	0.2	8.11	0.15	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.1	12.70	0.07	B	0.0	6.33	0.04	A
<b>2036 DS2 Base + Dev</b>								
Stream B-C	1.2	28.57	0.54	D	0.3	9.38	0.25	A
Stream B-A	0.0	0.00	0.00	A	0.0	0.00	0.00	A
Stream C-AB	0.2	13.69	0.15	B	0.1	6.96	0.10	A

*There are warnings associated with one or more model runs - see the 'Data Errors and Warnings' tables for each Analysis or Demand Set.*

*Values shown are the highest values encountered over all time segments. Delay is the maximum value of average delay per arriving vehicle.*


## File summary

### File Description

Title	(untitled)
Location	
Site number	
Date	19/04/2018
Version	
Status	(new file)
Identifier	
Client	
Jobnumber	
Enumerator	PEGASUSGROUP\Philip.Wragg
Description	

## Units

Distance units	Speed units	Traffic units input	Traffic units results	Flow units	Average delay units	Total delay units	Rate of delay units
m	kph	Veh	PCU	perHour	s	-Min	perMin

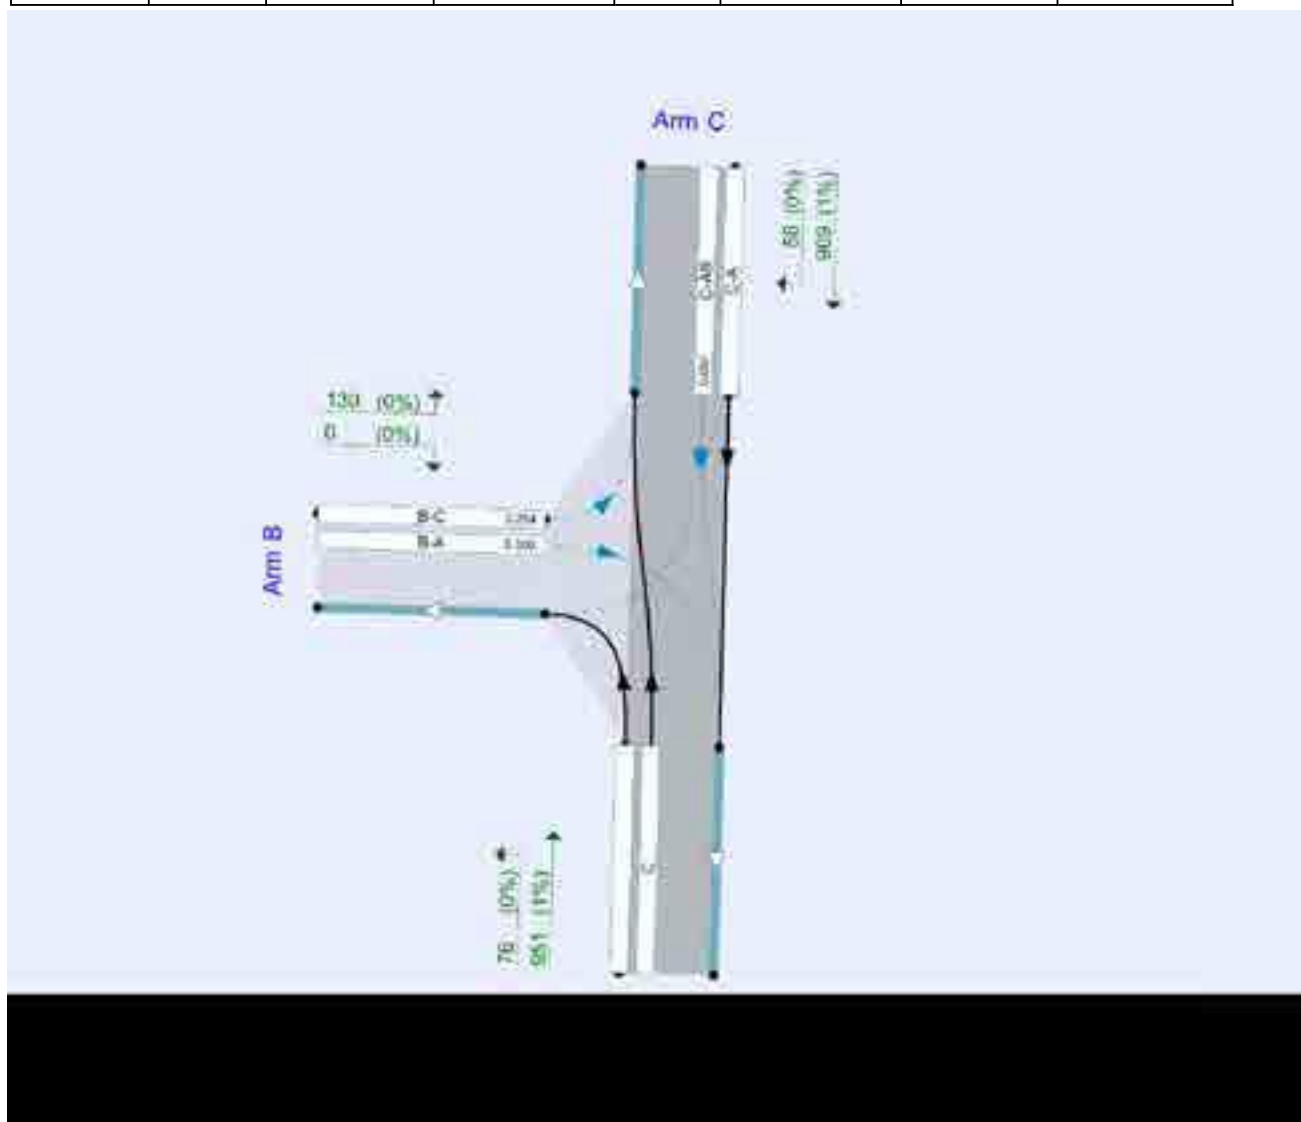

The junction diagram reflects the last run of Junctions.

### Analysis Options

Vehicle length (m)	Calculate Queue Percentiles	Calculate detailed queueing delay	Calculate residual capacity	RFC Threshold	Average Delay threshold (s)	Queue threshold (PCU)
5.75	✓			0.85	36.00	20.00

### Demand Set Summary

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D1	2036 DS1 Base	AM		FLAT	07:45	09:15	90	15	✓
D2	2036 DS1 Base	PM		FLAT	16:45	18:15	90	15	✓
D5	2036 DS1 Base + Dev	AM	Base (no Stubbington bypass) to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓
D6	2036 DS1 Base + Dev	PM	Base (no Stubbington bypass) growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓
D7	2036 DS2 Base	AM		FLAT	07:45	09:15	90	15	✓
D8	2036 DS2 Base	PM		FLAT	16:45	18:15	90	15	✓
D11	2036 DS2 Base + Dev	AM	Base to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓
D12	2036 DS2 Base + Dev	PM	Base growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

### Analysis Set Details

ID	Include in report	Network flow scaling factor (%)	Network capacity scaling factor (%)
A1	✓	100.000	100.000

# 2036 DS1 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.42	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Arms

### Arms

Arm	Name	Description	Arm type
A	NGL South (South)		Major
B	Old NGL		Minor
C	NGL South (North)		Major

### Major Arm Geometry

Arm	Width of carriageway (m)	Has kerbed central reserve	Width of kerbed central reserve (m)	Has right turn bay	Width for right turn (m)	Visibility for right turn (m)	Blocks?	Blocking queue (PCU)
C	7.30	✓	4.00	✓	4.80	250.0	✓	10.00

Geometries for Arm C are measured opposite Arm B. Geometries for Arm A (if relevant) are measured opposite Arm D.

### Minor Arm Geometry

Arm	Minor arm type	Width at give-way (m)	Width at 5m (m)	Width at 10m (m)	Width at 15m (m)	Width at 20m (m)	Estimate flare length	Flare length (PCU)	Visibility to left (m)	Visibility to right (m)
B	One lane plus flare	10.00	9.50	6.30	5.35	5.10		3.00	94	75

## Slope / Intercept / Capacity

### Priority Intersection Slopes and Intercepts

Junction	Stream	Intercept (PCU/hr)	Slope for A-B	Slope for A-C	Slope for C-A	Slope for C-B
1	B-A	550	0.087	0.219	0.138	0.313
1	B-C	806	0.116	0.294	-	-
1	C-B	922	0.337	0.337	-	-

The slopes and intercepts shown above do NOT include any corrections or adjustments.

Streams may be combined, in which case capacity will be adjusted.

Values are shown for the first time segment only; they may differ for subsequent time segments.

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D1	2036 DS1 Base	AM	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1734	100.000
B		FLAT	✓	49	100.000
C		FLAT	✓	890	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	20	1714
	B	0	0	49
	C	864	25	0

## Vehicle Mix

### Heavy Vehicle Percentages

	To			
	A	B	C	
From	A	0	6	3
	B	0	0	5
	C	7	4	0

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.18	16.20	0.2	~1	C	51	76
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.08	12.80	0.1	~1	B	27	40
C-A						921	1381
A-B						21	32
A-C						1765	2648

## Main Results for each time segment

### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	283	0.180	50	0.0	0.2	16.081	C
B-A	0	0	26	0.000	0	0.0	0.0	0.000	A
C-AB	27	7	320	0.083	26	0.0	0.1	12.773	B
C-A	921	230			921				
A-B	21	5			21				
A-C	1765	441			1765				

### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	283	0.180	51	0.2	0.2	16.200	C
B-A	0	0	26	0.000	0	0.0	0.0	0.000	A
C-AB	27	7	320	0.083	27	0.1	0.1	12.803	B
C-A	921	230			921				
A-B	21	5			21				
A-C	1765	441			1765				

### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	283	0.180	51	0.2	0.2	16.202	C
B-A	0	0	26	0.000	0	0.0	0.0	0.000	A
C-AB	27	7	320	0.083	27	0.1	0.1	12.803	B
C-A	921	230			921				
A-B	21	5			21				
A-C	1765	441			1765				

### 08:30 - 08:45

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	283	0.180	51	0.2	0.2	16.202	C
B-A	0	0	26	0.000	0	0.0	0.0	0.000	A
C-AB	27	7	320	0.083	27	0.1	0.1	12.803	B
C-A	921	230			921				
A-B	21	5			21				
A-C	1765	441			1765				

### 08:45 - 09:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	283	0.180	51	0.2	0.2	16.202	C
B-A	0	0	26	0.000	0	0.0	0.0	0.000	A
C-AB	27	7	320	0.083	27	0.1	0.1	12.803	B
C-A	921	230			921				
A-B	21	5			21				
A-C	1765	441			1765				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	51	13	283	0.180	51	0.2	0.2	16.202	C
B-A	0	0	26	0.000	0	0.0	0.0	0.000	A
C-AB	27	7	320	0.083	27	0.1	0.1	12.803	B
C-A	921	230			921				
A-B	21	5			21				
A-C	1765	441			1765				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.22	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.23	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.23	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.23	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.23	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.23	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.09	~1	~1	~1	~1			N/A	N/A



# 2036 DS1 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.24	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D2	2036 DS1 Base	PM	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	994	100.000
B		FLAT	✓	56	100.000
C		FLAT	✓	1483	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To		
		A	B	C
From	A	0	19	975
	B	0	0	56
	C	1457	25	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To		
		A	B	C
From	A	0	0	1
	B	0	0	0
	C	1	0	0

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.11	7.87	0.1	~1	A	56	85
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.04	6.44	0.0	~1	A	25	38
C-A						1469	2204
A-B						19	28
A-C						983	1475

### Main Results for each time segment

#### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	56	14	514	0.110	56	0.0	0.1	7.854	A
B-A	0	0	122	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	584	0.044	25	0.0	0.0	6.437	A
C-A	1469	367			1469				
A-B	19	5			19				
A-C	983	246			983				

#### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	56	14	514	0.110	56	0.1	0.1	7.869	A
B-A	0	0	122	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	584	0.044	25	0.0	0.0	6.440	A
C-A	1469	367			1469				
A-B	19	5			19				
A-C	983	246			983				

#### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	56	14	514	0.110	56	0.1	0.1	7.869	A
B-A	0	0	122	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	584	0.044	25	0.0	0.0	6.440	A
C-A	1469	367			1469				
A-B	19	5			19				
A-C	983	246			983				

**17:30 - 17:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	56	14	514	0.110	56	0.1	0.1	7.869	A
B-A	0	0	122	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	584	0.044	25	0.0	0.0	6.440	A
C-A	1469	367			1469				
A-B	19	5			19				
A-C	983	246			983				

**17:45 - 18:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	56	14	514	0.110	56	0.1	0.1	7.869	A
B-A	0	0	122	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	584	0.044	25	0.0	0.0	6.440	A
C-A	1469	367			1469				
A-B	19	5			19				
A-C	983	246			983				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	56	14	514	0.110	56	0.1	0.1	7.869	A
B-A	0	0	122	0.000	0	0.0	0.0	0.000	A
C-AB	25	6	584	0.044	25	0.0	0.0	6.440	A
C-A	1469	367			1469				
A-B	19	5			19				
A-C	983	246			983				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.05	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.05	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.05	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.05	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.05	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.12	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.05	~1	~1	~1	~1			N/A	N/A

# 2036 DS1 Base + Dev, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		1.30	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D5	2036 DS1 Base + Dev	AM	Base (no Stubbington bypass) to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1745	100.000
B		FLAT	✓	129	100.000
C		FLAT	✓	966	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To		
		A	B	C
From	A	0	31	1714
	B	0	0	129
	C	918	48	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To		
		A	B	C
From	A	0	4	3
	B	0	0	2
	C	6	2	0

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.46	24.24	0.9	~1	C	131	196
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.15	13.77	0.2	~1	B	49	73
C-A						975	1462
A-B						32	48
A-C						1765	2648

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	131	33	282	0.464	128	0.0	0.8	23.257	C
B-A	0	0	10	0.000	0	0.0	0.0	0.000	A
C-AB	49	12	316	0.154	48	0.0	0.2	13.694	B
C-A	975	244			975				
A-B	32	8			32				
A-C	1765	441			1765				

#### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	131	33	282	0.464	131	0.8	0.9	24.199	C
B-A	0	0	10	0.000	0	0.0	0.0	0.000	A
C-AB	49	12	316	0.154	49	0.2	0.2	13.766	B
C-A	975	244			975				
A-B	32	8			32				
A-C	1765	441			1765				

#### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	131	33	282	0.464	131	0.9	0.9	24.223	C
B-A	0	0	10	0.000	0	0.0	0.0	0.000	A
C-AB	49	12	316	0.154	49	0.2	0.2	13.766	B
C-A	975	244			975				
A-B	32	8			32				
A-C	1765	441			1765				

**08:30 - 08:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	131	33	282	0.464	131	0.9	0.9	24.230	C
B-A	0	0	10	0.000	0	0.0	0.0	0.000	A
C-AB	49	12	316	0.154	49	0.2	0.2	13.766	B
C-A	975	244			975				
A-B	32	8			32				
A-C	1765	441			1765				

**08:45 - 09:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	131	33	282	0.464	131	0.9	0.9	24.235	C
B-A	0	0	10	0.000	0	0.0	0.0	0.000	A
C-AB	49	12	316	0.154	49	0.2	0.2	13.766	B
C-A	975	244			975				
A-B	32	8			32				
A-C	1765	441			1765				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	131	33	282	0.464	131	0.9	0.9	24.237	C
B-A	0	0	10	0.000	0	0.0	0.0	0.000	A
C-AB	49	12	316	0.154	49	0.2	0.2	13.766	B
C-A	975	244			975				
A-B	32	8			32				
A-C	1765	441			1765				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.84	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.18	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.86	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.18	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.87	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.19	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.87	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.19	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.87	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.19	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.87	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.19	~1	~1	~1	~1			N/A	N/A



# 2036 DS1 Base + Dev, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.50	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D6	2036 DS1 Base + Dev	PM	Base (no Stubbington bypass) growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1040	100.000
B		FLAT	✓	105	100.000
C		FLAT	✓	1534	100.000

## Origin-Destination Data

### Demand (Veh/hr)

From	To		
	A	B	C
A	0	65	975
B	0	0	105
C	1477	57	0

## Vehicle Mix

### Heavy Vehicle Percentages

From	To		
	A	B	C
A	0	0	1
B	0	0	0
C	1	0	0

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.21	8.94	0.3	~1	A	105	158
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.10	7.03	0.1	~1	A	57	85
C-A						1490	2236
A-B						65	97
A-C						984	1476

### Main Results for each time segment

#### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	105	26	508	0.207	104	0.0	0.3	8.892	A
B-A	0	0	105	0.000	0	0.0	0.0	0.000	A
C-AB	57	14	569	0.100	56	0.0	0.1	7.018	A
C-A	1490	373			1490				
A-B	65	16			65				
A-C	984	246			984				

#### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	105	26	508	0.207	105	0.3	0.3	8.935	A
B-A	0	0	105	0.000	0	0.0	0.0	0.000	A
C-AB	57	14	569	0.100	57	0.1	0.1	7.029	A
C-A	1490	373			1490				
A-B	65	16			65				
A-C	984	246			984				

#### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	105	26	508	0.207	105	0.3	0.3	8.935	A
B-A	0	0	105	0.000	0	0.0	0.0	0.000	A
C-AB	57	14	569	0.100	57	0.1	0.1	7.029	A
C-A	1490	373			1490				
A-B	65	16			65				
A-C	984	246			984				

**17:30 - 17:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	105	26	508	0.207	105	0.3	0.3	8.935	A
B-A	0	0	105	0.000	0	0.0	0.0	0.000	A
C-AB	57	14	569	0.100	57	0.1	0.1	7.029	A
C-A	1490	373			1490				
A-B	65	16			65				
A-C	984	246			984				

**17:45 - 18:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	105	26	508	0.207	105	0.3	0.3	8.935	A
B-A	0	0	105	0.000	0	0.0	0.0	0.000	A
C-AB	57	14	569	0.100	57	0.1	0.1	7.029	A
C-A	1490	373			1490				
A-B	65	16			65				
A-C	984	246			984				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	105	26	508	0.207	105	0.3	0.3	8.935	A
B-A	0	0	105	0.000	0	0.0	0.0	0.000	A
C-AB	57	14	569	0.100	57	0.1	0.1	7.029	A
C-A	1490	373			1490				
A-B	65	16			65				
A-C	984	246			984				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.26	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.26	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.26	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.26	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.26	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.26	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

# 2036 DS2 Base, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.56	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D7	2036 DS2 Base	AM	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1741	100.000
B		FLAT	✓	61	100.000
C		FLAT	✓	595	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To		
		A	B	C
From	A	0	24	1716
	B	0	0	61
	C	574	21	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To		
		A	B	C
From	A	0	6	3
	B	0	0	5
	C	7	4	0

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.23	17.27	0.3	~1	C	64	96
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.07	12.70	0.1	~1	B	22	33
C-A						612	918
A-B						26	38
A-C						1767	2651

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	64	16	282	0.228	63	0.0	0.3	17.084	C
B-A	0	0	69	0.000	0	0.0	0.0	0.000	A
C-AB	22	6	318	0.069	22	0.0	0.1	12.676	B
C-A	612	153			612				
A-B	26	6			26				
A-C	1767	442			1767				

#### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	64	16	282	0.228	64	0.3	0.3	17.265	C
B-A	0	0	69	0.000	0	0.0	0.0	0.000	A
C-AB	22	6	318	0.069	22	0.1	0.1	12.701	B
C-A	612	153			612				
A-B	26	6			26				
A-C	1767	442			1767				

#### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	64	16	282	0.228	64	0.3	0.3	17.266	C
B-A	0	0	69	0.000	0	0.0	0.0	0.000	A
C-AB	22	6	318	0.069	22	0.1	0.1	12.701	B
C-A	612	153			612				
A-B	26	6			26				
A-C	1767	442			1767				

**08:30 - 08:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	64	16	282	0.228	64	0.3	0.3	17.268	C
B-A	0	0	69	0.000	0	0.0	0.0	0.000	A
C-AB	22	6	318	0.069	22	0.1	0.1	12.701	B
C-A	612	153			612				
A-B	26	6			26				
A-C	1767	442			1767				

**08:45 - 09:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	64	16	282	0.228	64	0.3	0.3	17.268	C
B-A	0	0	69	0.000	0	0.0	0.0	0.000	A
C-AB	22	6	318	0.069	22	0.1	0.1	12.701	B
C-A	612	153			612				
A-B	26	6			26				
A-C	1767	442			1767				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	64	16	282	0.228	64	0.3	0.3	17.268	C
B-A	0	0	69	0.000	0	0.0	0.0	0.000	A
C-AB	22	6	318	0.069	22	0.1	0.1	12.701	B
C-A	612	153			612				
A-B	26	6			26				
A-C	1767	442			1767				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.30	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.30	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.31	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.31	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.31	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.31	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.08	~1	~1	~1	~1			N/A	N/A



# 2036 DS2 Base, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.38	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D8	2036 DS2 Base	PM	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	976	100.000
B		FLAT	✓	76	100.000
C		FLAT	✓	909	100.000

## Origin-Destination Data

### Demand (Veh/hr)

		To		
		A	B	C
From	A	0	25	951
	B	0	0	76
	C	887	21	0

## Vehicle Mix

### Heavy Vehicle Percentages

From	To		
	A	B	C
A	0	0	1
B	0	0	0
C	1	0	0

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.15	8.11	0.2	~1	A	76	114
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.04	6.33	0.0	~1	A	21	32
C-A						895	1343
A-B						25	38
A-C						960	1440

### Main Results for each time segment

#### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	76	19	520	0.147	76	0.0	0.2	8.090	A
B-A	0	0	207	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	590	0.036	21	0.0	0.0	6.326	A
C-A	895	224			895				
A-B	25	6			25				
A-C	960	240			960				

#### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	76	19	520	0.147	76	0.2	0.2	8.114	A
B-A	0	0	207	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	590	0.036	21	0.0	0.0	6.328	A
C-A	895	224			895				
A-B	25	6			25				
A-C	960	240			960				

#### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	76	19	520	0.147	76	0.2	0.2	8.114	A
B-A	0	0	207	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	590	0.036	21	0.0	0.0	6.328	A
C-A	895	224			895				
A-B	25	6			25				
A-C	960	240			960				

**17:30 - 17:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	76	19	520	0.147	76	0.2	0.2	8.114	A
B-A	0	0	207	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	590	0.036	21	0.0	0.0	6.328	A
C-A	895	224			895				
A-B	25	6			25				
A-C	960	240			960				

**17:45 - 18:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	76	19	520	0.147	76	0.2	0.2	8.114	A
B-A	0	0	207	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	590	0.036	21	0.0	0.0	6.328	A
C-A	895	224			895				
A-B	25	6			25				
A-C	960	240			960				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	76	19	520	0.147	76	0.2	0.2	8.114	A
B-A	0	0	207	0.000	0	0.0	0.0	0.000	A
C-AB	21	5	590	0.036	21	0.0	0.0	6.328	A
C-A	895	224			895				
A-B	25	6			25				
A-C	960	240			960				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.17	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.04	~1	~1	~1	~1			N/A	N/A

# 2036 DS2 Base + Dev, AM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		1.87	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D11	2036 DS2 Base + Dev	AM	Base to 2024 growth with Development	FLAT	07:45	09:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1750	100.000
B		FLAT	✓	150	100.000
C		FLAT	✓	687	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	33	1716
	B	0	0	150
	C	641	46	0

## Vehicle Mix

### Heavy Vehicle Percentages

From	To		
	A	B	C
A	0	4	3
B	0	0	2
C	6	2	0

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.54	28.57	1.2	?	D	153	229
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.15	13.69	0.2	~1	B	47	70
C-A						679	1018
A-B						35	52
A-C						1767	2651

### Main Results for each time segment

#### 07:45 - 08:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	153	38	281	0.544	148	0.0	1.1	26.800	D
B-A	0	0	51	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	315	0.148	46	0.0	0.2	13.627	B
C-A	679	170			679				
A-B	35	9			35				
A-C	1767	442			1767				

#### 08:00 - 08:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	153	38	281	0.544	153	1.1	1.2	28.476	D
B-A	0	0	51	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	315	0.148	47	0.2	0.2	13.693	B
C-A	679	170			679				
A-B	35	9			35				
A-C	1767	442			1767				

#### 08:15 - 08:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	153	38	281	0.544	153	1.2	1.2	28.532	D
B-A	0	0	51	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	315	0.148	47	0.2	0.2	13.693	B
C-A	679	170			679				
A-B	35	9			35				
A-C	1767	442			1767				

**08:30 - 08:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	153	38	281	0.544	153	1.2	1.2	28.551	D
B-A	0	0	51	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	315	0.148	47	0.2	0.2	13.693	B
C-A	679	170			679				
A-B	35	9			35				
A-C	1767	442			1767				

**08:45 - 09:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	153	38	281	0.544	153	1.2	1.2	28.562	D
B-A	0	0	51	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	315	0.148	47	0.2	0.2	13.693	B
C-A	679	170			679				
A-B	35	9			35				
A-C	1767	442			1767				

**09:00 - 09:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	153	38	281	0.544	153	1.2	1.2	28.568	D
B-A	0	0	51	0.000	0	0.0	0.0	0.000	A
C-AB	47	12	315	0.148	47	0.2	0.2	13.693	B
C-A	679	170			679				
A-B	35	9			35				
A-C	1767	442			1767				

**Queue Variation Results for each time segment**
**07:45 - 08:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	1.14	?	?	?	?			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.17	~1	~1	~1	~1			N/A	N/A

**08:00 - 08:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	1.17	?	?	?	?			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.18	~1	~1	~1	~1			N/A	N/A

**08:15 - 08:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	1.19	?	?	?	?			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.18	~1	~1	~1	~1			N/A	N/A

**08:30 - 08:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	1.19	?	?	?	?			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.18	~1	~1	~1	~1			N/A	N/A

**08:45 - 09:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	1.20	?	?	?	?			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.18	~1	~1	~1	~1			N/A	N/A

**09:00 - 09:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	1.20	?	?	?	?			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.18	~1	~1	~1	~1			N/A	N/A



# 2036 DS2 Base + Dev, PM

## Data Errors and Warnings

Severity	Area	Item	Description
Warning	Flow Arm A	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm B	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Flow Arm C	Analysis Options	Queue percentiles cannot be calculated for the selected traffic profile type.
Warning	Queue variations	Analysis Options	Queue percentiles may be unreliable if the mean queue in any time segment is very low or very high.

## Junction Network

### Junctions

Junction	Name	Junction type	Major road direction	Use circulating lanes	Junction Delay (s)	Junction LOS
1	Newgate Lane BP / Old Newgate Ln	T-Junction	Two-way		0.75	A

### Junction Network Options

Driving side	Lighting
Left	Normal/unknown

## Traffic Demand

### Demand Set Details

ID	Scenario name	Time Period name	Description	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time period length (min)	Time segment length (min)	Run automatically
D12	2036 DS2 Base + Dev	PM	Base growth to 2024 + Development	FLAT	16:45	18:15	90	15	✓

Vehicle mix varies over turn	Vehicle mix varies over entry	Vehicle mix source	PCU Factor for a HV (PCU)
✓	✓	HV Percentages	2.00

### Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (Veh/hr)	Scaling Factor (%)
A		FLAT	✓	1027	100.000
B		FLAT	✓	130	100.000
C		FLAT	✓	965	100.000

## Origin-Destination Data

### Demand (Veh/hr)

	To			
	A	B	C	
From	A	0	76	951
	B	0	0	130
	C	909	56	0

## Vehicle Mix

### Heavy Vehicle Percentages

		To		
		A	B	C
From	A	0	0	1
	B	0	0	0
	C	1	0	0

## Results

### Results Summary for whole modelled period

Stream	Max RFC	Max Delay (s)	Max Queue (PCU)	Max 95th percentile Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
B-C	0.25	9.38	0.3	~1	A	130	196
B-A	0.00	0.00	0.0	~1	A	0	0
C-AB	0.10	6.96	0.1	~1	A	56	84
C-A						917	1376
A-B						76	114
A-C						960	1440

### Main Results for each time segment

#### 16:45 - 17:00

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	130	33	514	0.254	129	0.0	0.3	9.321	A
B-A	0	0	189	0.000	0	0.0	0.0	0.000	A
C-AB	56	14	573	0.097	55	0.0	0.1	6.948	A
C-A	917	229			917				
A-B	76	19			76				
A-C	960	240			960				

#### 17:00 - 17:15

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	130	33	514	0.254	130	0.3	0.3	9.385	A
B-A	0	0	189	0.000	0	0.0	0.0	0.000	A
C-AB	56	14	573	0.097	56	0.1	0.1	6.959	A
C-A	917	229			917				
A-B	76	19			76				
A-C	960	240			960				

#### 17:15 - 17:30

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	130	33	514	0.254	130	0.3	0.3	9.385	A
B-A	0	0	189	0.000	0	0.0	0.0	0.000	A
C-AB	56	14	573	0.097	56	0.1	0.1	6.959	A
C-A	917	229			917				
A-B	76	19			76				
A-C	960	240			960				

**17:30 - 17:45**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	130	33	514	0.254	130	0.3	0.3	9.385	A
B-A	0	0	189	0.000	0	0.0	0.0	0.000	A
C-AB	56	14	573	0.097	56	0.1	0.1	6.959	A
C-A	917	229			917				
A-B	76	19			76				
A-C	960	240			960				

**17:45 - 18:00**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	130	33	514	0.254	130	0.3	0.3	9.385	A
B-A	0	0	189	0.000	0	0.0	0.0	0.000	A
C-AB	56	14	573	0.097	56	0.1	0.1	6.959	A
C-A	917	229			917				
A-B	76	19			76				
A-C	960	240			960				

**18:00 - 18:15**

Stream	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
B-C	130	33	514	0.254	130	0.3	0.3	9.385	A
B-A	0	0	189	0.000	0	0.0	0.0	0.000	A
C-AB	56	14	573	0.097	56	0.1	0.1	6.959	A
C-A	917	229			917				
A-B	76	19			76				
A-C	960	240			960				

**Queue Variation Results for each time segment**
**16:45 - 17:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.34	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**17:00 - 17:15**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.34	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**17:15 - 17:30**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.34	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**17:30 - 17:45**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.34	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**17:45 - 18:00**

Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.34	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

**18:00 - 18:15**


Stream	Mean (PCU)	Q05 (PCU)	Q50 (PCU)	Q90 (PCU)	Q95 (PCU)	Percentile message	Marker message	Probability of reaching or exceeding marker	Probability of exactly reaching marker
B-C	0.34	~1	~1	~1	~1			N/A	N/A
B-A	0.00	~1	~1	~1	~1			N/A	N/A
C-AB	0.11	~1	~1	~1	~1			N/A	N/A

Basic Results Summary  
**Basic Results Summary**

**User and Project Details**

<b>Project:</b>	
<b>Title:</b>	
<b>Location:</b>	
<b>Additional detail:</b>	
<b>File name:</b>	Newgate collin Left only 2036.lsg3x
<b>Author:</b>	
<b>Company:</b>	
<b>Address:</b>	

**Scenario 1: 'Left only 2036 DS1 AM Base + Development'** (FG17: '2036 DS1 AM Base+Dev', Plan 1: 'Plan 1')  
**Network Layout Diagram**

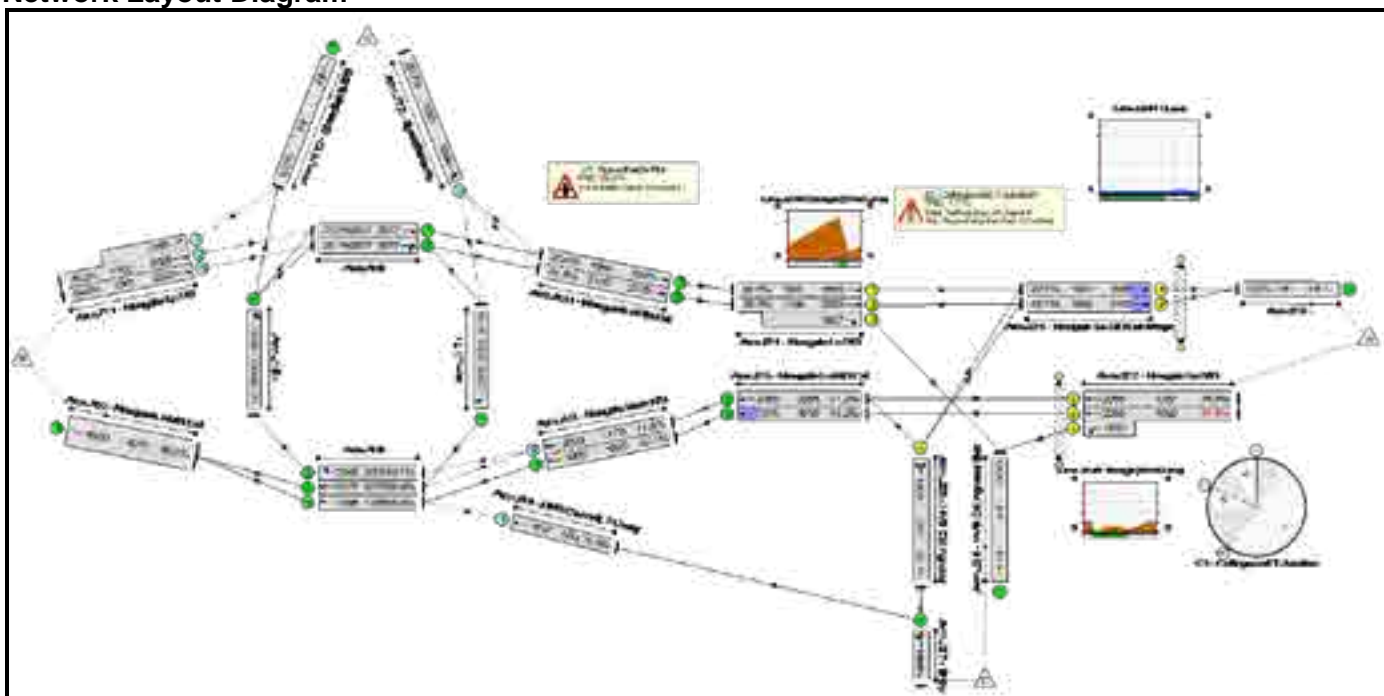

**Traffic Flows, Actual**

**Actual Flow :**

	Destination					Tot.
	A	B	C	D	Tot.	
Origin	A	81	1351	235	162	1829
	B	819	0	263	201	1283
	C	47	182	0	12	241
	D	18	63	7	0	88
	Tot.	965	1596	505	375	3441

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	91.5%	3166	0	0	27.9	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	71.8%	3166	0	0	6.6	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	733	2029:1786	1562	46.9%	1466	0	0	0.4	2.2	0.4	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	550	2029	1001	54.9%	550	0	0	0.6	4.0	0.6	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	241	1894	1063	22.7%	241	0	0	0.1	2.2	0.1	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	828	1965	1965	42.1%	-	-	-	0.4	1.6	0.4	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	846	2029	1178	71.8%	846	0	0	3.0	12.7	16.8	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	63	1747	533	11.8%	63	0	0	0.1	3.8	0.1	-
5/1	Right Ahead	U	-		-	-	-	323	2058	2058	15.7%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	497	2077	2077	23.9%	-	-	-	0.2	1.1	0.2	-
6/2	Right Ahead	U	-		-	-	-	604	2077	2077	29.1%	-	-	-	0.2	1.2	0.2	-
7/1	Right	U	-		-	-	-	182	2005	2005	9.1%	-	-	-	0.0	1.0	0.0	-
8/1	Ahead	U	-		-	-	-	891	1965	1965	45.3%	-	-	-	0.4	1.7	0.4	-
8/2	Ahead	U	-		-	-	-	705	2077	2077	33.9%	-	-	-	0.3	1.3	0.3	-
8/3	Right	U	-		-	-	-	323	2005	2005	16.1%	-	-	-	0.1	1.1	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1596	4070	4070	39.2%	-	-	-	0.3	0.7	0.2	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	499	1965	1965	25.4%	-	-	-	0.2	1.2	0.2	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	661	2105	2105	31.4%	-	-	-	0.2	1.2	0.2	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>91.5%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>21.3</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A	1	35	-	499	1915	985	50.7%	-	-	-	2.1	15.1	7.0	4.5	
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C	1	35:9	-	661	2055:1827	1248	53.0%	-	-	-	3.7	19.9	6.1	4.1	
2/2+2/1	Newgate Ln N/B Ahead Left	U	B	1	35	-	990	2055:1702	1082	91.5%	-	-	-	8.9	32.5	21.2	7.8	
2/3	Newgate Ln N/B Ahead	U	B	1	35	-	839	2055	1057	79.4%	-	-	-	5.1	22.1	15.2	7.5	
3/1	HMS Collingwood Right Left	U	D	1	7	-	25	1809	207	12.1%	-	-	-	0.3	37.8	0.5	0.4	
4/1	Newgate Ln S/B Exit Merge Ahead	U	G	1	54	-	500	1965	1544	32.4%	-	-	-	0.3	1.9	0.3	0.1	
4/2	Newgate Ln S/B Exit Merge Ahead	U	G	1	54	-	465	2105	1654	28.1%	-	-	-	0.2	1.7	0.3	0.1	
5/1	Newgate Ln N/B Exit Ahead	U	-	-	-	-	828	1915	1915	43.2%	-	-	-	0.4	1.7	0.6	-	
5/2	Newgate Ln N/B Exit Ahead	U	-	-	-	-	846	2055	2055	41.2%	-	-	-	0.3	1.5	0.3	-	
Ped Link: P1	Newgate Ln S/B	-	E	1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-	
Ped Link: P2	Newgate Ln N/B	-	F	1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-	
C1 - Collingwood T-Junction		PRC for Signalled Lanes (%):		-1.7		Total Delay for Signalled Lanes (pcuHr):		20.55		Cycle Time (s):		70						
		PRC Over All Lanes (%):		-1.7		Total Delay Over All Lanes(pcuHr):		27.89										

Basic Results Summary

Scenario 2: 'Left only 2036 DS1 PM Base + Development' (FG18: '2036 DS1 PM Base+Dev', Plan 1: 'Plan 1')

Network Layout Diagram

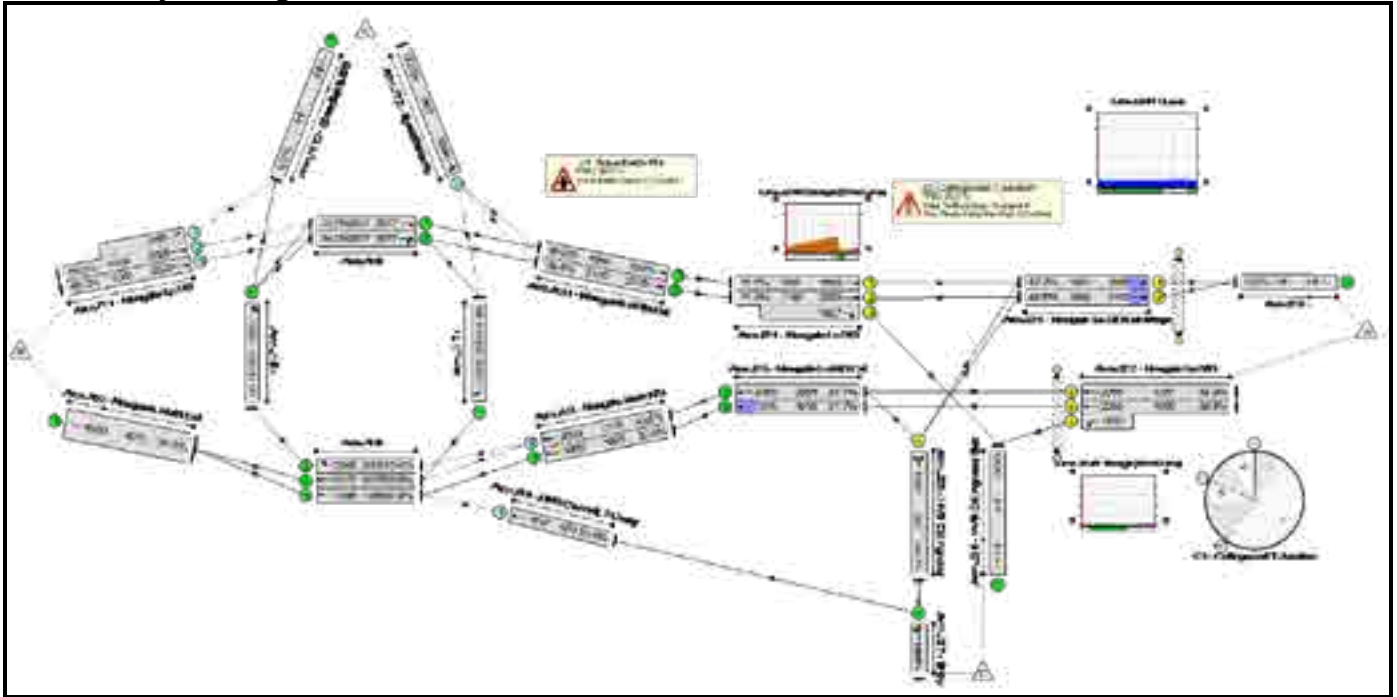

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	51	847	172	11	1081
	B	1274	0	281	76	1631
	C	131	289	0	8	428
	D	78	137	25	0	240
	Tot.	1534	1273	478	95	3380



Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	71.7%	3634	0	0	21.1	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	65.2%	3634	0	0	5.3	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	950	2029:1786	1484	64.0%	1900	0	0	0.9	3.4	0.9	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	681	2029	1045	65.2%	681	0	0	0.9	4.9	0.9	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	428	1894	847	50.5%	428	0	0	0.5	4.3	0.5	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	607	1965	1965	30.9%	-	-	-	0.2	1.3	0.2	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	488	2029	1119	43.6%	488	0	0	0.6	4.2	6.6	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	137	1747	581	23.6%	137	0	0	0.2	4.0	0.2	-
5/1	Right Ahead	U	-		-	-	-	248	2062	2062	12.0%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	690	2077	2077	33.2%	-	-	-	0.2	1.3	0.2	-
6/2	Right Ahead	U	-		-	-	-	711	2077	2077	34.2%	-	-	-	0.3	1.3	0.3	-
7/1	Right	U	-		-	-	-	289	2005	2005	14.4%	-	-	-	0.1	1.0	0.1	-
8/1	Ahead	U	-		-	-	-	744	1965	1965	37.9%	-	-	-	0.3	1.5	2.0	-
8/2	Ahead	U	-		-	-	-	529	2077	2077	25.5%	-	-	-	0.2	1.2	0.2	-
8/3	Right	U	-		-	-	-	248	2005	2005	12.4%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1273	4070	4070	31.3%	-	-	-	0.2	0.6	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	706	1965	1965	35.9%	-	-	-	0.3	1.4	0.3	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	834	2105	2105	39.6%	-	-	-	0.3	1.4	0.3	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>71.7%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>15.8</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	706	1915	985	71.7%	-	-	-	3.9	19.9	11.9	6.4
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	834	2055:1827	1168	71.4%	-	-	-	4.7	20.3	12.4	6.9
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	618	2055:1702	1056	58.5%	-	-	-	2.7	15.8	8.8	5.4
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	463	2055	1057	43.8%	-	-	-	1.8	13.7	5.9	4.1
3/1	HMS Collingwood Right Left	U	D		1	7	-	103	1812	207	49.7%	-	-	-	1.3	46.3	2.3	1.7
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	731	1965	1544	47.3%	-	-	-	0.5	2.4	0.6	0.2
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	803	2105	1654	48.6%	-	-	-	0.5	2.3	0.6	0.2
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	607	1915	1915	31.7%	-	-	-	0.3	1.6	0.5	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	488	2055	2055	23.7%	-	-	-	0.2	1.1	0.2	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		25.5		Total Delay for Signalled Lanes (pcuHr):		15.39		Cycle Time (s):		70				
				PRC Over All Lanes (%):		25.5		Total Delay Over All Lanes(pcuHr):		21.12								

Basic Results Summary

Scenario 3: 'Left only 2036 DS2 AM Base + Development' (FG19: '2036 DS2 AM Base + Dev', Plan 1: 'Plan 1')

Network Layout Diagram

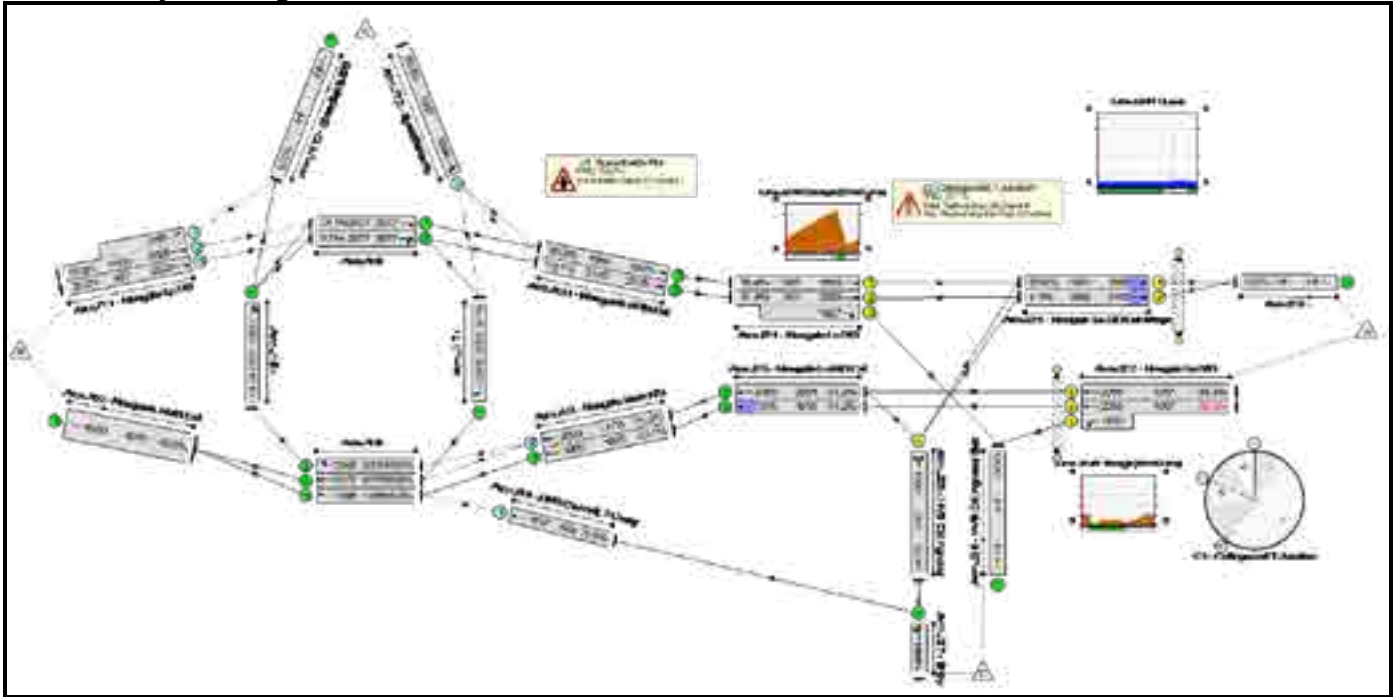

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	89	1403	235	162	1889
	B	556	0	263	201	1020
	C	48	182	0	12	242
	D	19	63	7	0	89
	Tot.	712	1648	505	375	3240

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	93.3%	3031	0	0	31.9	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	75.3%	3031	0	0	6.7	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	819	2029:1786	1468	55.8%	1638	0	0	0.6	2.8	0.6	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	201	2029	997	20.2%	201	0	0	0.1	2.3	0.1	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	242	1894	1247	19.4%	242	0	0	0.1	1.8	0.1	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	847	1965	1965	43.1%	-	-	-	0.4	1.6	0.4	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	887	2029	1178	75.3%	887	0	0	3.5	14.1	17.8	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	63	1747	529	11.9%	63	0	0	0.1	3.9	0.1	-
5/1	Right Ahead	U	-		-	-	-	331	2057	2057	16.1%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	645	2077	2077	31.1%	-	-	-	0.2	1.3	0.2	-
6/2	Right Ahead	U	-		-	-	-	201	2077	2077	9.7%	-	-	-	0.1	1.0	0.1	-
7/1	Right	U	-		-	-	-	182	2005	2005	9.1%	-	-	-	0.0	1.0	0.0	-
8/1	Ahead	U	-		-	-	-	910	1965	1965	46.3%	-	-	-	0.4	1.7	0.4	-
8/2	Ahead	U	-		-	-	-	738	2077	2077	35.5%	-	-	-	0.3	1.3	0.3	-
8/3	Right	U	-		-	-	-	331	2005	2005	16.5%	-	-	-	0.1	1.1	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1648	4070	4070	40.5%	-	-	-	0.3	0.7	0.2	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	693	1965	1965	35.3%	-	-	-	0.3	1.4	0.3	-


Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	213	2105	2105	10.1%	-	-	-	0.1	1.0	0.1	-
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>93.3%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>25.2</b>	-	-	-
1/1	Newgate Ln S/B Ahead	U	A	1	35	-	693	1915	985	70.4%	-	-	-	3.8	19.6	11.9	6.3
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C	1	35:9	-	213	2055:1827	261	81.6%	-	-	-	3.8	63.7	6.0	1.0
2/2+2/1	Newgate Ln N/B Ahead Left	U	B	1	35	-	1009	2055:1702	1081	93.3%	-	-	-	10.2	36.5	23.0	8.0
2/3	Newgate Ln N/B Ahead	U	B	1	35	-	880	2055	1057	83.3%	-	-	-	6.0	24.3	16.8	7.8
3/1	HMS Collingwood Right Left	U	D	1	7	-	26	1810	207	12.6%	-	-	-	0.3	37.8	0.5	0.4
4/1	Newgate Ln S/B Exit Merge Ahead	U	G	1	54	-	694	1965	1544	45.0%	-	-	-	0.4	2.3	0.6	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G	1	54	-	18	2105	1654	1.1%	-	-	-	0.0	1.1	0.0	0.0
5/1	Newgate Ln N/B Exit Ahead	U	-	-	-	-	847	1915	1915	44.2%	-	-	-	0.4	1.7	0.6	-
5/2	Newgate Ln N/B Exit Ahead	U	-	-	-	-	887	2055	2055	43.2%	-	-	-	0.4	1.5	0.4	-
Ped Link: P1	Newgate Ln S/B	-	E	1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F	1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction		PRC for Signalled Lanes (%):		-3.7		Total Delay for Signalled Lanes (pcuHr):		24.43		Cycle Time (s):		70					
		PRC Over All Lanes (%):		-3.7		Total Delay Over All Lanes(pcuHr):		31.92									

Basic Results Summary

Scenario 4: 'Left only 2036 DS2 PM Base + Development' (FG20: '2036 DS2 PM Base + Dev', Plan 1: 'Plan 1')

Network Layout Diagram

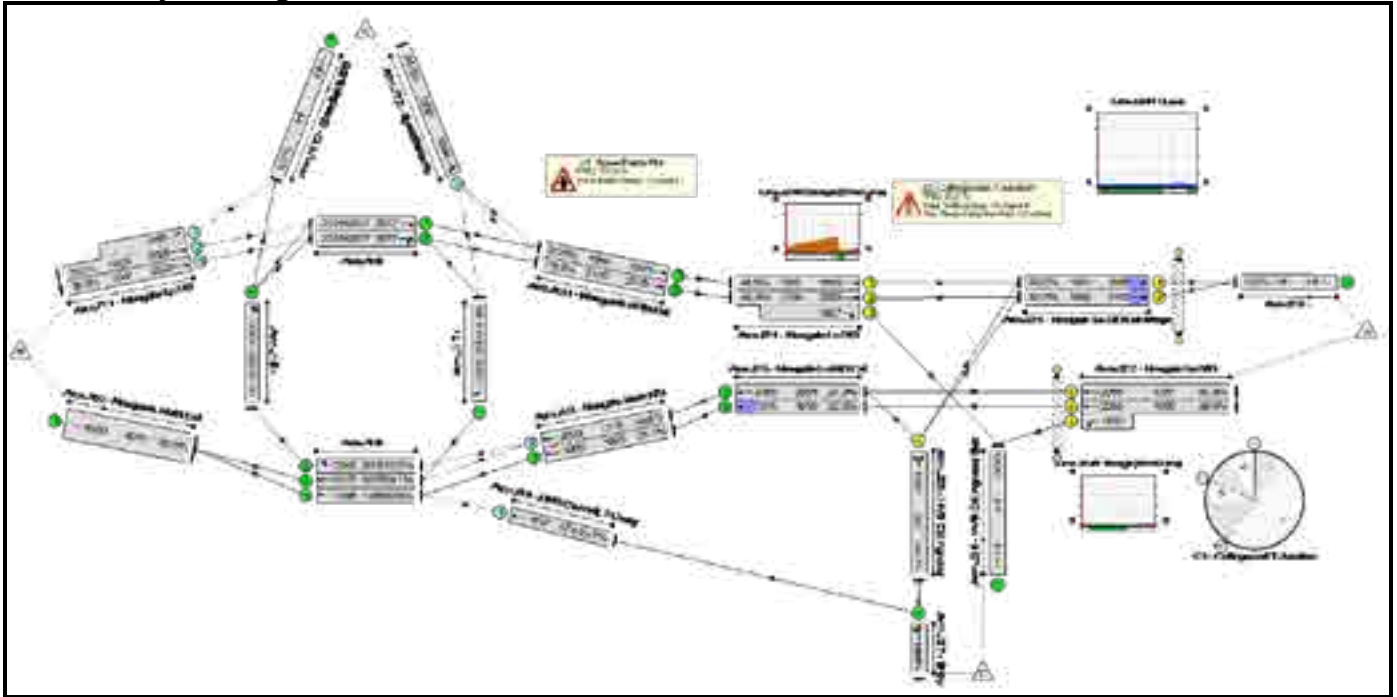

Traffic Flows, Actual

Actual Flow :

	Destination					Tot.
	A	B	C	D		
Origin	A	48	876	172	11	1107
	B	743	0	281	76	1100
	C	131	289	0	8	428
	D	78	137	25	0	240
	Tot.	1000	1302	478	95	2875

Basic Results Summary

**Network Results**

Item	Lane Description	Lane Type	Full Phase	Arrow Phase	Num Greens	Total Green (s)	Arrow Green (s)	Demand Flow (pcu)	Sat Flow (pcu/Hr)	Capacity (pcu)	Deg Sat (%)	Turners In Gaps (pcu)	Turners When Unopposed (pcu)	Turners In Intergreen (pcu)	Total Delay (pcuHr)	Av. Delay Per PCU (s/pcu)	Mean Max Queue (pcu)	Back of Uniform Q At End of Red(pcu)
<b>Network</b>	-	-	-		-	-	-	-	-	-	<b>59.9%</b>	<b>2858</b>	<b>0</b>	<b>0</b>	<b>14.7</b>	-	-	-
<b>J1: Speedfields Rbt</b>	-	-	-		-	-	-	-	-	-	<b>44.6%</b>	<b>2858</b>	<b>0</b>	<b>0</b>	<b>3.4</b>	-	-	-
1/2+1/1	Newgate Ln S/B Ahead Left	O	-		-	-	-	694	2029:1786	1825	38.0%	1388	0	0	0.3	1.6	0.3	-
1/3	Newgate Ln S/B Ahead	O	-		-	-	-	406	2029	1047	38.8%	406	0	0	0.3	2.8	0.3	-
2/1	Speedfields Pk Ahead Left	O	-		-	-	-	428	1894	1232	34.8%	428	0	0	0.3	2.2	0.3	-
3/1	Newgate Lane N/B Ahead	U	-		-	-	-	622	1965	1965	31.7%	-	-	-	0.2	1.3	0.2	-
3/2	Newgate Lane N/B Ahead	O	-		-	-	-	499	2029	1119	44.6%	499	0	0	0.6	4.3	7.0	-
4/1	HMS C'wood LT G-way Ahead	O	-		-	-	-	137	1747	578	23.7%	137	0	0	0.2	4.1	0.2	-
5/1	Right Ahead	U	-		-	-	-	245	2063	2063	11.9%	-	-	-	0.1	1.0	0.1	-
6/1	Ahead	U	-		-	-	-	435	2077	2077	20.9%	-	-	-	0.1	1.1	0.1	-
6/2	Right Ahead	U	-		-	-	-	432	2077	2077	20.8%	-	-	-	0.1	1.1	0.1	-
7/1	Right	U	-		-	-	-	289	2005	2005	14.4%	-	-	-	0.1	1.0	0.1	-
8/1	Ahead	U	-		-	-	-	759	1965	1965	38.6%	-	-	-	0.3	1.5	2.5	-
8/2	Ahead	U	-		-	-	-	543	2077	2077	26.1%	-	-	-	0.2	1.2	0.2	-
8/3	Right	U	-		-	-	-	245	2005	2005	12.2%	-	-	-	0.1	1.0	0.1	-
9/1	Newgate Ln N/B Exit	U	-		-	-	-	1302	4070	4070	32.0%	-	-	-	0.2	0.7	0.1	-
11/1	Newgate Ln S/B Exit Ahead	U	-		-	-	-	462	1965	1965	23.5%	-	-	-	0.2	1.2	0.2	-

Basic Results Summary

11/2	Newgate Ln S/B Exit Ahead	U	-	-	-	-	544	2105	2105	25.8%	-	-	-	0.2	1.2	0.2	-	
<b>J2: Collingwood T-junction</b>	-	-	-	-	-	-	-	-	-	<b>59.9%</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>11.3</b>	-	-	-	
1/1	Newgate Ln S/B Ahead	U	A		1	35	-	462	1915	985	46.9%	-	-	-	1.9	14.9	6.3	4.3
1/2+1/3	Newgate Ln S/B Ahead Right	U	A C		1	35:9	-	544	2055:1827	1224	44.4%	-	-	-	2.5	16.4	6.2	4.3
2/2+2/1	Newgate Ln N/B Ahead Left	U	B		1	35	-	633	2055:1702	1056	59.9%	-	-	-	2.8	16.1	9.3	5.5
2/3	Newgate Ln N/B Ahead	U	B		1	35	-	474	2055	1057	44.8%	-	-	-	1.8	13.8	6.2	4.2
3/1	HMS Collingwood Right Left	U	D		1	7	-	103	1812	207	49.7%	-	-	-	1.3	46.3	2.3	1.7
4/1	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	467	1965	1544	30.2%	-	-	-	0.2	1.8	0.3	0.1
4/2	Newgate Ln S/B Exit Merge Ahead	U	G		1	54	-	533	2105	1654	32.2%	-	-	-	0.3	1.7	0.3	0.1
5/1	Newgate Ln N/B Exit Ahead	U	-		-	-	-	622	1915	1915	32.5%	-	-	-	0.3	1.6	0.6	-
5/2	Newgate Ln N/B Exit Ahead	U	-		-	-	-	499	2055	2055	24.3%	-	-	-	0.2	1.2	0.2	-
Ped Link: P1	Newgate Ln S/B	-	E		1	5	-	0	-	0	0.0%	-	-	-	-	-	-	-
Ped Link: P2	Newgate Ln N/B	-	F		1	23	-	0	-	0	0.0%	-	-	-	-	-	-	-
C1 - Collingwood T-Junction				PRC for Signalled Lanes (%):		50.2		Total Delay for Signalled Lanes (pcuHr):		10.85		Cycle Time (s): 70						
				PRC Over All Lanes (%):		50.2		Total Delay Over All Lanes(pcuHr):		14.70								